

**Public Notice
Antidegradation Analysis**

Notice is hereby given that a draft antidegradation analysis (AA), associated with an application for Iowa Department of Natural Resources (DNR) Section 401 Water Quality Certification, has been completed for the following projects.

PROJECT DESCRIPTION: Concrete Box Culvert Removal from abandoned road and subsequent shaping of side slopes to 3:1 of dry run unnamed tributary to Village Creek. Box culvert is causing log jams on the upstream side during storm events. Storm flow has since cut a new channel around the box culvert. Based on the design, the concrete will be removed offsite and the total area impacted by removal & shaping would be 3,200 sq ft. The vicinity of the Box Culvert is nonhydric and is approx 10ft higher in elevation than the Lansing/Harpers Road to the east and approximately 16ft higher than where it flows into Village Creek.

Project Location: 43.322388/-91.234078, Allamakee County

The AA and supporting information are available at <https://www.iowadnr.gov/Environmental-Protection/Water-Quality/Section-401-Water-Quality-Certification>.

Anyone wishing to comment on the AA must do so in writing by 4:30 PM on **October 31, 2026**. All relevant comments will be considered by the DNR. Written comments should be submitted by email to Section401WQC@dnr.iowa.gov or by mail to the DNR, Attn: Section 401 Water Quality Certification, 6200 Park Ave., Des Moines, IA 50321.

Memorandum

DATE: September 30, 2026
FROM: Brandon Harland
RE: Rationale for Section 401 Water Quality Certification for 2026-0697_Burkhart - Culvert Project

Project Description: Concrete Box Culvert Removal from abandoned road and subsequent shaping of side slopes to 3:1 of dry run unnamed tributary to Village Creek. Box culvert is causing log jams on the upstream side during storm events. Storm flow has since cut a new channel around the box culvert. Based on the design, the concrete will be removed offsite and the total area impacted by removal & shaping would be 3,200 sq ft. The vicinity of the Box Culvert is nonhydric and is approx 10ft higher in elevation than the Lansing/Harpers Road to the east and approximately 16ft higher than where it flows into Village Creek.

Project Location: 43.322388/-91.234078, Allamakee County

Receiving Water Bodies

Village Creek is an A1, BCW1, HH designated use waterbody. The designated uses have been adopted in Iowa's state rule, described in the rule-referenced document of Surface Water Classification effective on July 24, 2019. Village Creek is an Outstanding Iowa Water, per the State adopted Iowa Antidegradation Implementation Procedure (2010 and 2016).

Antidegradation

Pollutants of Concern

This project proposes removal of an abandoned culvert and shaping stream side slopes to prevent erosion. Chemicals will not be used. Thus, the pollutants present in the discharge from such construction are substances present in runoff, or are the result of a spill. The DNR has identified the following pollutant of concern in discharges from this project and the potential impacts on water quality:

Increased Turbidity/Total Suspended Solids

The turbidity of water is related to the amount of suspended solids contained in the water. Suspended solids decrease the clarity of water, reduce light penetration, and can impair the photosynthetic activity of aquatic plants. Suspended solids can be aesthetically displeasing and can reduce the recreational value of a water body. If suspended solids screen out light and impair growth of aquatic plants, dissolved oxygen levels can decrease. Suspended solids can be harmful to fish and other aquatic life by causing abrasive injuries and clogging gills and respiratory passages.

Increases in turbidity/total suspended solids from projects authorized by this project will generally be local and temporary. To address turbidity/total suspended solids, the permittee will control runoff to water bodies using a variety of best management practices (BMPs).

Best Management Practices in Permit and Certification Conditions

Permit-Based

The Corps has BMP-based conditions in the Section 404 permit.

Construction activity that disturb one or more acres require a storm water NPDES permit from the DNR. For projects that require storm water NPDES permits, Storm Water Pollution Prevention Plans (SWPPPs) are developed, which typically include BMP-based conditions.

Certification-Based

The DNR is adding BMP-based conditions to the certification. The combined listed BMPs, when adhered to by the permittee, protect Iowa's water quality by controlling erosion and sediment runoff to prevent pollution from reaching the nearby water bodies. Antidegradation requirements will be considered to be met if all appropriate and reasonable BMPs required by permit and certification are applied and maintained. See, 567 IAC 61.2(2); Iowa Antidegradation Implementation Procedure § 6.3.

Temporary and Limited Degradation

The State adopted Iowa Antidegradation Implementation Procedure (2010 and 2016) states that "A regulated activity shall not be considered to result in degradation, if the activity will result in only temporary and limited degradation of water quality as defined in the glossary and as further described in Sections 1.2 and 2.4." The effects can be regarded as temporary and limited following a review of all of the following factors, if applicable:

- a) Length of time during which water quality will be lowered
The length of time where there might be a lowering of water quality is relatively short for the proposed activity.
- b) Percent change in ambient conditions
The only significant change that is reasonably expected to occur would be for the presence of sediment in the stream if there is a heavy rainstorm or if the BMPs fail.
- c) Pollutants affected
Turbidity, total suspended solids.
- d) Likelihood for long-term water quality benefits to the water body
This activity provides water quality benefits by stabilizing a bank/shore.
- e) Degree to which achieving the applicable Water Quality Standards during the proposed activity will be at risk
The use of BMPs installed prior to construction, maintained during construction, and until the site has returned to pre-construction conditions should greatly increase the degree to which a project achieves the applicable water quality standards.
- f) Potential for any residual long-term effects on existing uses
The BMP-based conditions included in the Section 404 permit and certification include activities such as appropriate riprap and reseeding disturbed areas. This project should not contribute to any ongoing impacts to water quality.

For the above discussed reasons, the DNR makes the following finding:

This review concludes that water quality degradation due to this activity is temporary and limited.

Social and Economic Importance

This project is socially important for maintaining water quality as a tributary immediately upstream of the OIW Village Creek.

This project is economically important for the community, by creating jobs in the planning and construction of this project and likely using materials from local sources, for the value of the property.

For the above discussed reasons, the DNR makes the following finding:

This review concludes that water quality degradation due to this activity is necessary to accommodate important economic and social development.

Iowa Department of Natural Resources
Section 401 Water Quality Pre-Filing Meeting and Certification Request Form
Pre-Filing Meeting Request Form

1a. Property Owner/Project Proponent (aka Applicant) Name: Alan Burkhart

Company Name (if applicable): _____

Mailing Address: 16601 230th St, Hawkeye, IA 52147

Email Address: alburkhart.ab@gmail.com

Phone numbers (with area code): Home: 563-427-5528 Cell: 563-380-4285 Business: _____

1b. Authorized Agent's Name (if applicable): Michelle Schaefers

Company Name: USDA-NRCS

Mailing Address: 120 N Industrial Pkwy, Ste 4, West Union, IA 52175

Email Address: michelle.schaefers@usda.gov

Phone numbers (with area code): Business: 563-412-3045 Cell: 563-777-0473

2. Identify the Proposed Project:

Concrete Box Culvert Removal from abandoned road and subsequent shaping of side slopes to 3:1 of dry run unnamed tributary to Village Creek. Box culvert is causing log jams on the upstream side during storm events. Storm flow has since cut a new channel around the box culvert. Based on the design, the concrete will be removed offsite and the total area impacted by removal & shaping would be 3,200 sq ft. The vicinity of the Box Culvert is nonhydric and is approx 10ft higher in elevation than the Lansing/Harpers Road to the east and approximately 16ft higher than where it flows into Village Creek. See attached Design, photographs, and aerial imagery.

3. Project Location:

43.322388' N

91.234078' W

County: Allamakee

Latitude: ~~91.234078' W~~

Longitude: ~~43.322388' N~~

Receiving Water(s): unnamed tributary to Village Creek

Discharge: project to be completed while dry, therefore little to no sediment should move down stream as a result

4. Pre-filing Meeting Request Verification:

I certify that I have read and understand the following statements per the Clean Water Act Section 401 Certification Rule:

- Submission of this form completes the requirement of the pre-filing meeting request.
- I cannot submit my certification request until at least 30 calendar days after submitting this pre-filing meeting request. This request must be signed by the Property Owner/Applicant and the Authorized Agent, if applicable.
- I have included the following materials in the application:
 - ☒ Map/diagram of the proposed project area (required)
 - ☒ Photographs of the proposed project area (required)
 - ☒ Relevant site data (if applicable)

Property Owner/Applicant's Name (printed): Alan R. Burkhart

Property Owner/Applicant's Signature: Alan R. Burkhart Date: 08-25-2026

If applicable: Authorized Agent's Name (printed): Michelle Schaefers

Authorized Agent's Signature: MICHELLE SCHAEFERS
Digitally signed by MICHELLE SCHAEFERS
Date: 2026.08.21 14:57:28 -05'00' Date: _____

Water Quality Pre-Filing Meeting Request and Certification Request Form

Certification Request Instructions

5. **Corps Project Manager.** Enter the name, email address, and phone number(s) of the Corps project manager associated with the proposed project.
6. **Federal Permit / License Requiring Section 401 Water Quality Certificate and its Project Number.** Certification is required for any federal license or permit that authorizes an activity that may result in a discharge to a water of the United States. The federal agency can tell you what their identification number is for your project. Please check the appropriate box to indicate the federal agency. **Important:** A copy of the federal permit or license application is **required** to be submitted with this certification request. For the Corps of Engineers Section 404 permits, DNR Flood Plain, and Sovereign Lands permits, the application form can be found on the [DNR's Flood Plain webpage](#).

Examples: Corps of Engineers NWP 27 #2020-0830
Corps of Engineers RP 33 #2020-1609
Corps of Engineers IP #2020-0361
FERC Hydropower #11530

7. **Include a description of any methods and means proposed to monitor the discharge and the equipment or measures planned to treat, control, or manage the discharge.** Please provide a description of the best management practices you will use to protect water quality as well as any methods and means proposed to monitor the discharge/equipment or measures planned to treat or control the discharge (e.g., silt fences will be installed to prevent sediment entering the water body, all equipment will be cleaned prior to construction, equipment will be checked regularly to ensure oil, gas, or other material do not enter the water body).
8. **Dates.** Exact start and end dates for the proposed project are required, while date(s) of proposed discharges can be approximate. While the DNR has a default reasonable period of time of 6 months to respond to a certification request, the DNR intends to respond to requests as quickly as possible within that time period.
9. **List all other federal, interstate, tribal, state, territorial, or local agency authorizations required for the proposed project, including all approvals or denials already received.** Typical authorizations include DNR Flood Plain, DNR Sovereign Lands, DNR NPDES Storm Water, and zoning permits.

Examples:

Agency	Type of Authorization	Agency Number	Date Applied	Date Approved	Date Denied
DNR	Flood Plain	2020-0517	6/15/2021	10/8/2021	
DNR	Sovereign Lands	2020-0517	6/15/2021		7/2/2021
DNR	NPDES	3500901	2/14/2021	5/20/2021	


10. **Date Pre-filing Meeting Request was submitted.** List the date that a pre-filing meeting request was submitted to the DNR.
11. **Certification Request Verification.** By signing the form, you must agree with everything stated in this section. The signature of the property owner/project proponent is required. If you are working with an authorized agent, their signature is also required.

Note: Certification requests must also be sent to the Federal Agency (i.e., Corps, FERC, etc.) at the same time. All projects in Iowa are in the Rock Island Corps District except for those below the ordinary high water mark of the Missouri River or west of the Missouri River, which are in the Omaha Corps District. For the Rock Island District Corps, send to the Corps project manager or to iowaregulatory@usace.army.mil. For the Omaha District Corps, send to the Corps project manager or to NE404Reg@usace.army.mil.

Burkhart Culvert Removal

Client(s): Alan Burkhart
Allamakee County, Iowa


Assisted By: Michelle Schaefer
WAUKON SERVICE CENTER

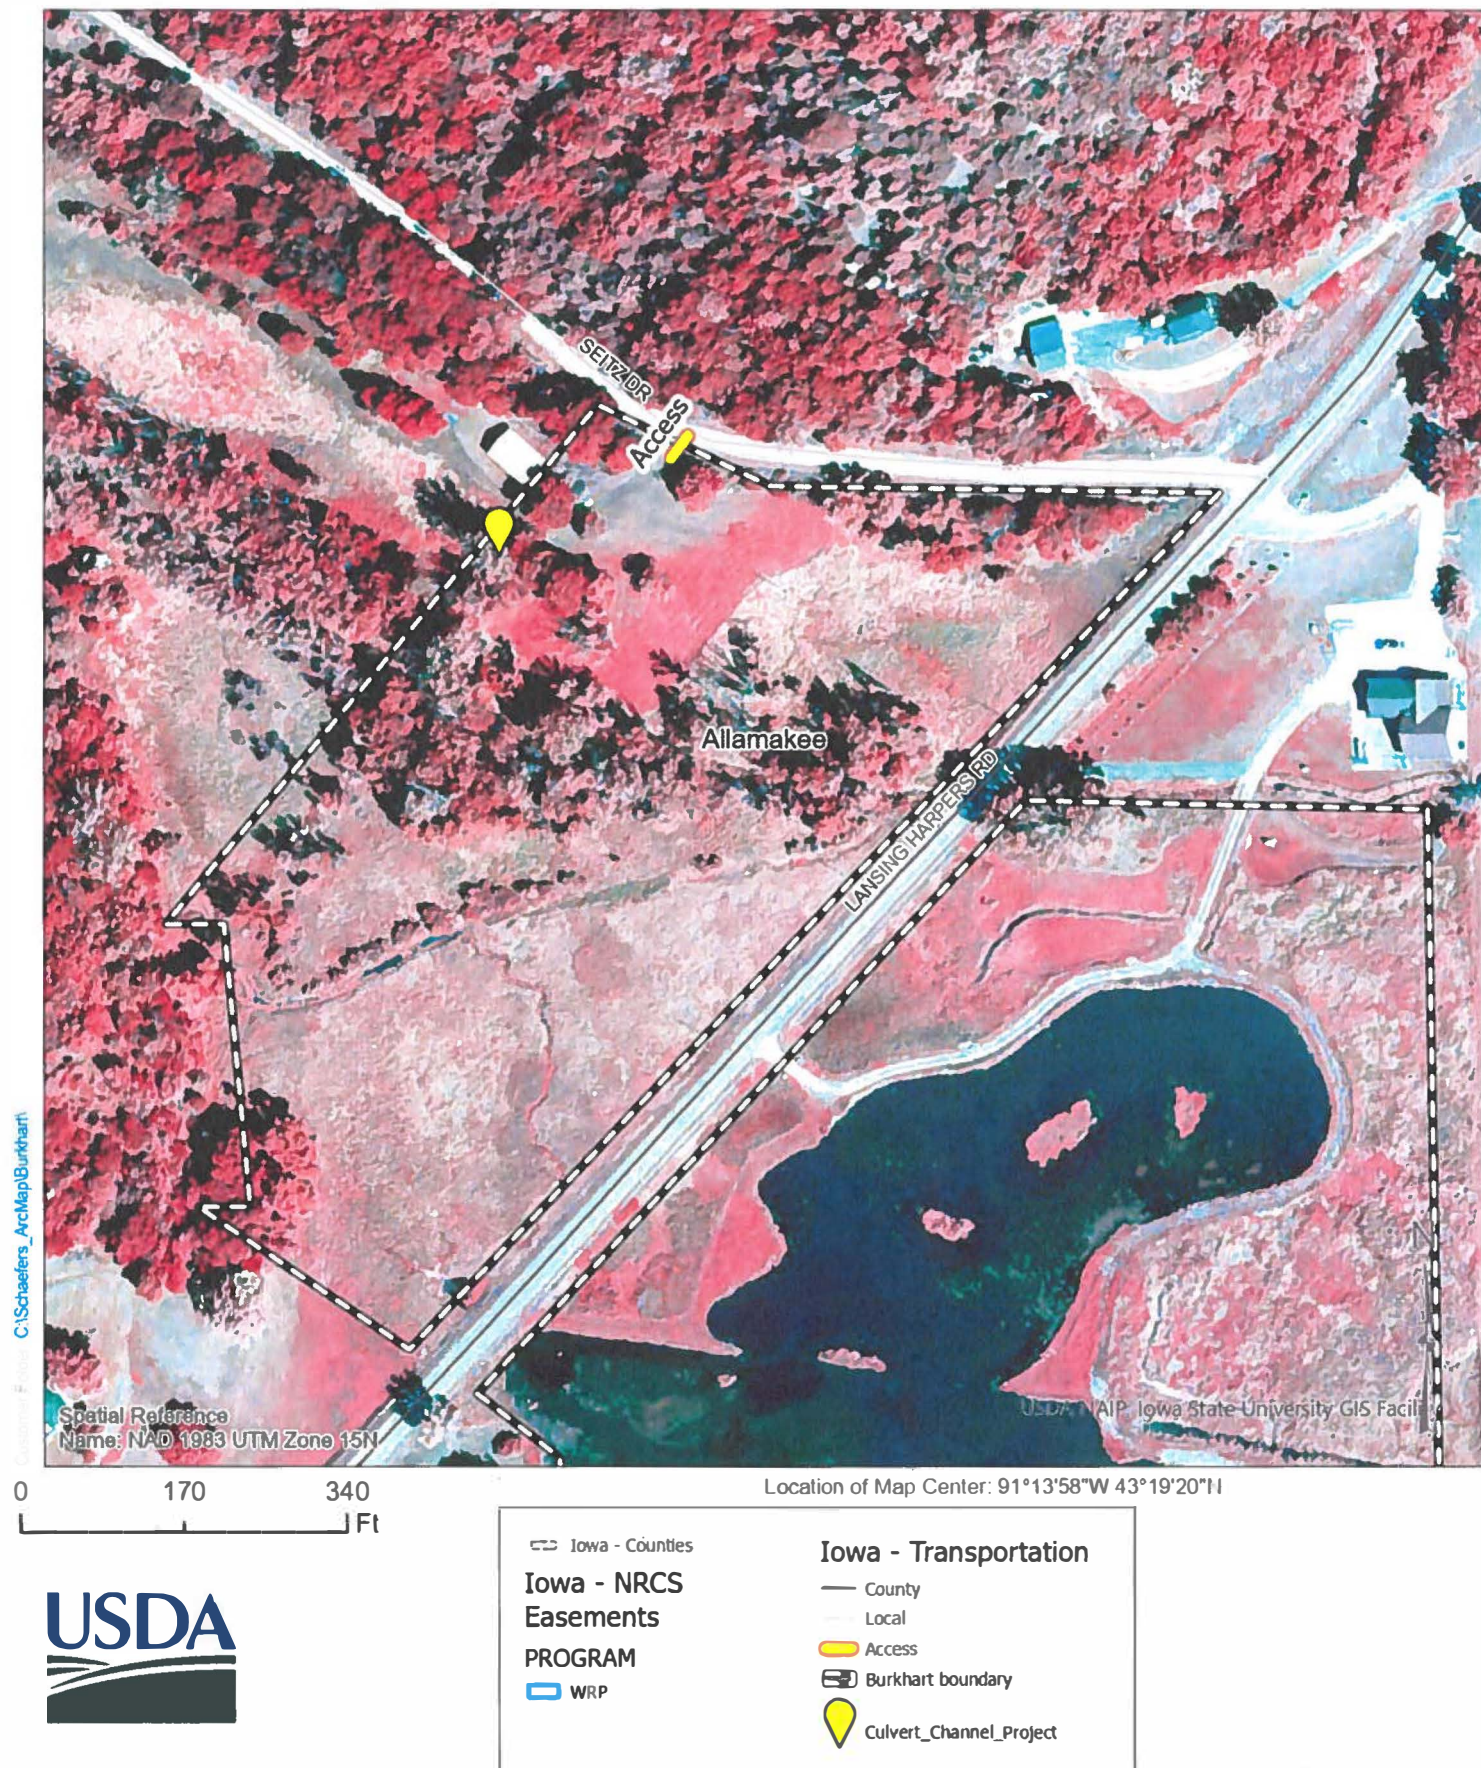

Log jam looking South/SE (Upstream)




Looking North/NE

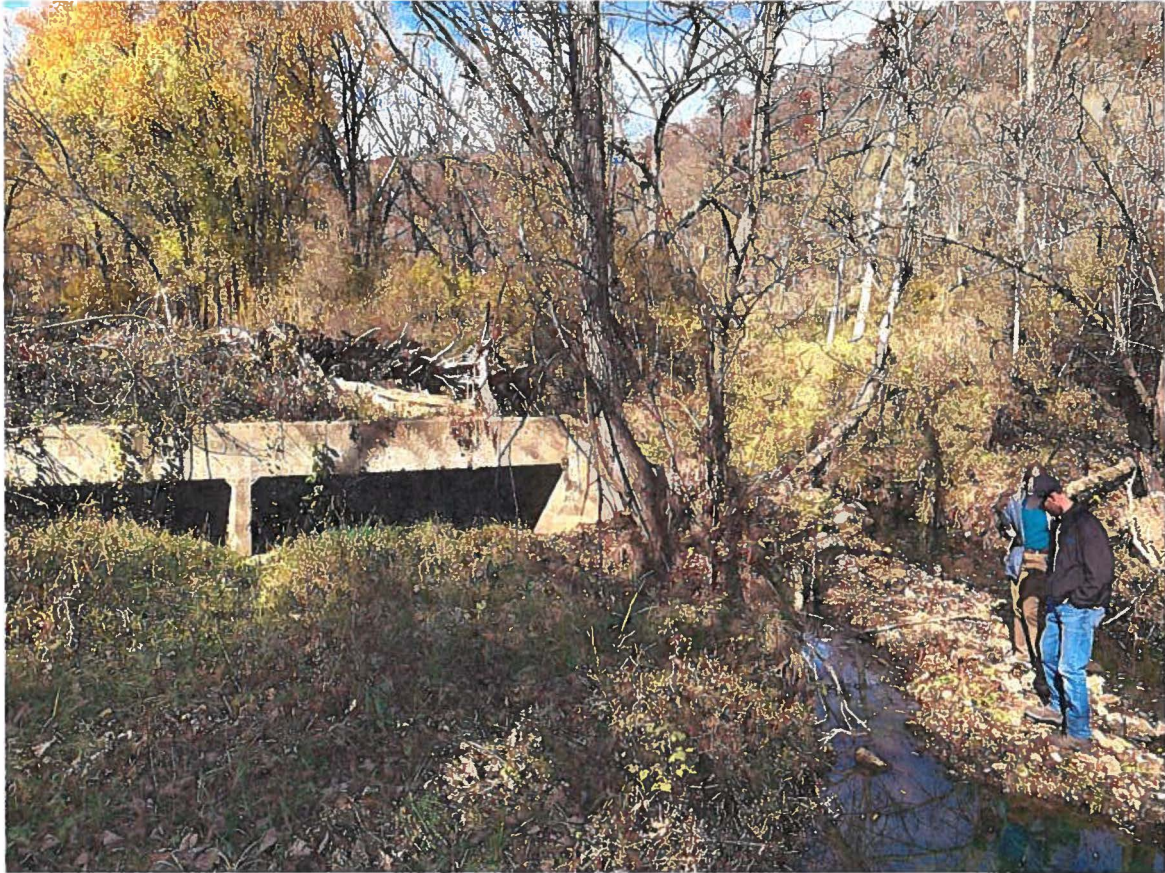

Overhead photo of concrete culvert – downstream side with log jam at the top left of photo



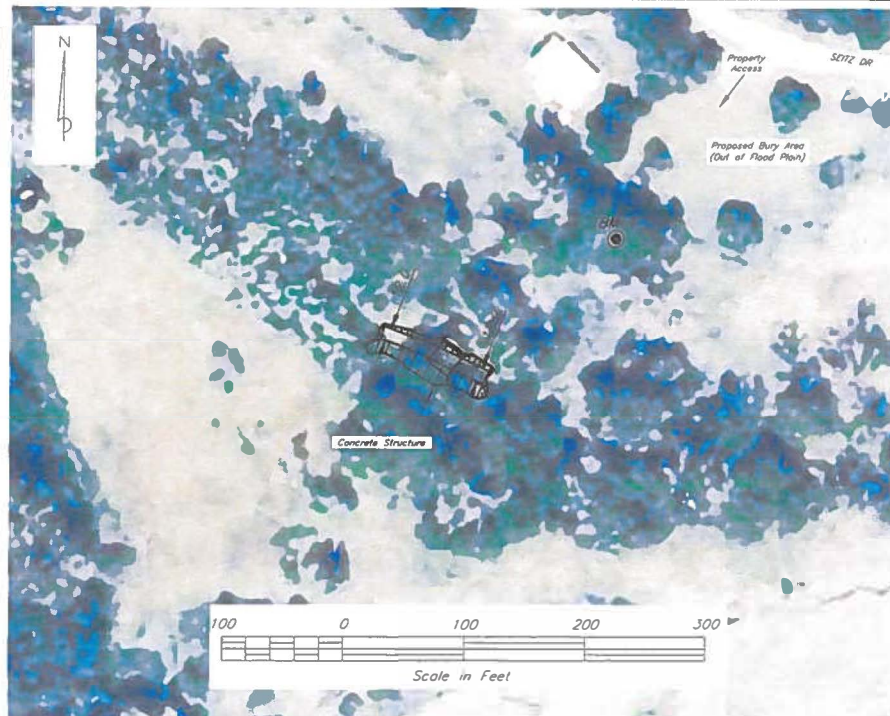

Index of Sheets

- 1- Plan View
- 2- Flowline Profile / Sections
- *Seeding Plan

The following Construction Specifications are part of this plan

- IA-1 Site Preparation
- IA-3 Structure Removal
- IA-5 Pollution Control
- IA-6 Seeding and Mulching for Cover
- IA-21 Excavation

Contractor is required to follow Iowa One Call law.
iowaOneCall.com or Call 811
Ticket # _____

If a cultural resource is identified during construction, stop immediately and notify the local Natural Resources Conservation Service office.

BENCH MARK

NO.	ELEV.	DESCRIPTION
IBM 1	649.48	2"x2" Wood Hub near field drive NE of concrete structure



Location Map

NE 1/4 Section 7, T98N R3W
Scale 1" = 5,000'

Items of Work

Work or Material	Spec #	Unit	Quantity
Clearing and Grubbing	IA-1	Job	1
Structure Excavation and Removal Includes channel shaping	IA-21	Cu. Yd.	252
Structure Excavation and Removal Includes channel shaping	IA-21	Sq. Ft.	3,211


I have reviewed and agree with the content of the plans and specifications prepared by the NRCS

Landowner: _____ Date: _____

I certify that this practice has been constructed in accordance with the plans and specifications.

Contractor: _____ Date: _____


NRCS Rep.: _____ Date: _____

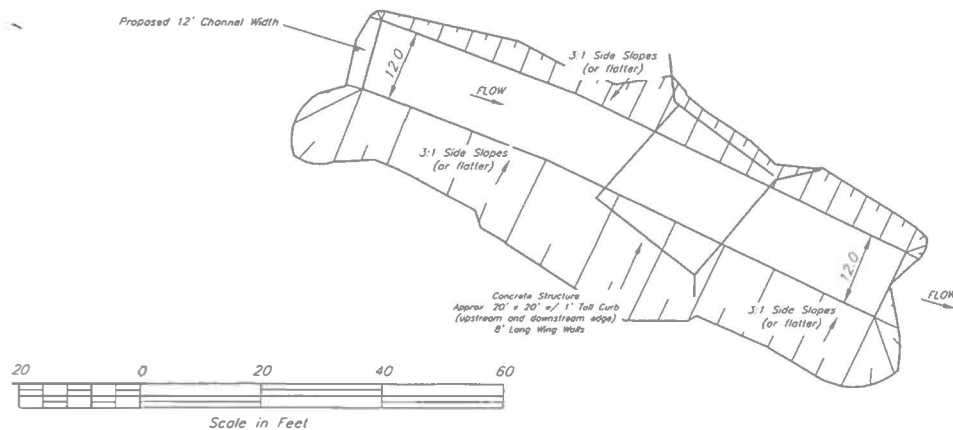


Date: 2-2026
Designed: Dan Mohn
Drawn: D. Mohn
Checked: 10/2/26
Approved: Alan Burkhardt

PLAN VIEW
Alan Burkhardt
Obstruction Removal (500') - Concrete Structure
EJC IV
198N, R3W Lafayette Twp, Section 7


USDA
Natural Resources Conservation Service
File No. Burkhardt.dwg
Drawing No.
6/4/26 11:44 AM
Sheet 1 of 2

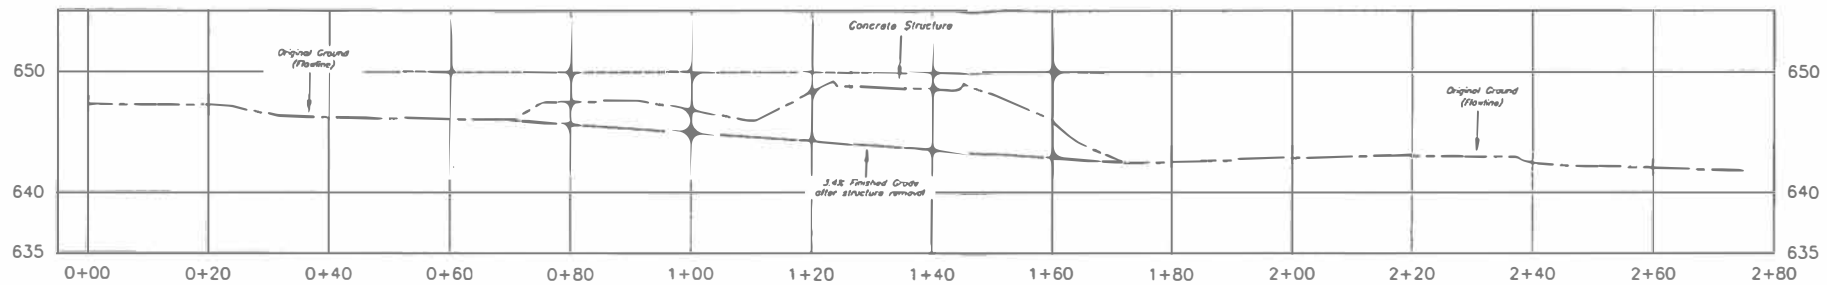


Flow Line PROFILE

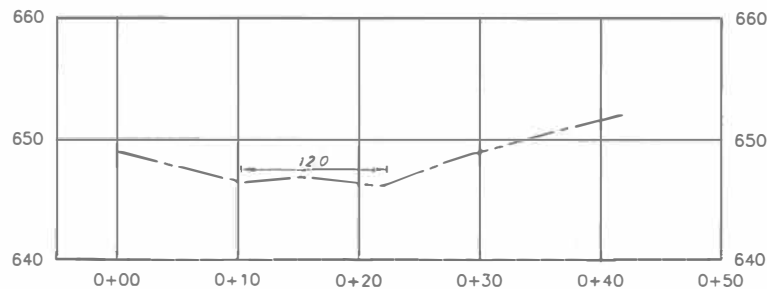

Upstream Cross Section PROFILE

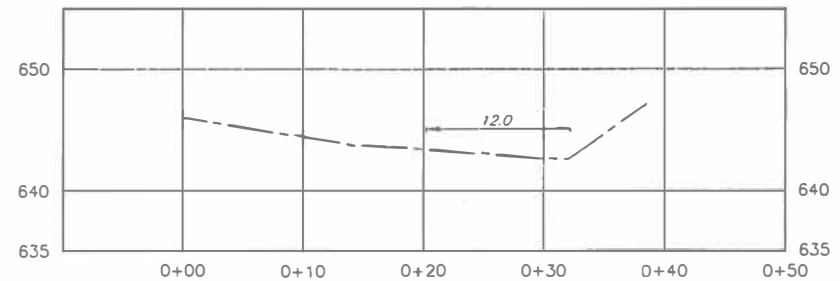

Downstream Cross Section PROFILE

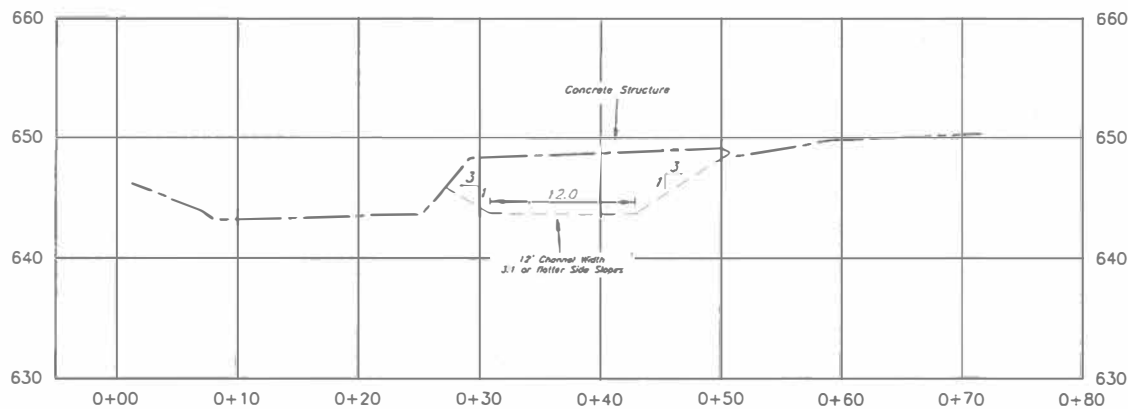

Cross Section @ Concrete Structure PROFILE

NOTES:

1. Remove obstruction by demolition, excavation and/or other means required for removal.
2. Dispose of all debris from the obstruction removal so that it does not impede subsequent work or cause onsite damage.
3. Dispose of concrete and woody vegetation by removal or burial at approved locations at landowner preference.
4. Maintain 1'-2' soil cover over buried material.
5. If burning is used for woody vegetation removal, implement appropriate smoke management to protect public health and safety.
6. Re-vegetate the disturbed area as soon as possible after construction. See seeding plan.

Date: 2-2026
Designed: D. Mohr
Drawn: D. Mohr
Checked: 6/26
Approved: 6/26


Flowline Profile/Sections
Alan Burkhardt
Obstruction Removal - Concrete Structure
EDC IV
198N, R3W, Lafayette Twp, Section 7
Allamakee County, Iowa

USDA
Natural Resources
Conservation Service
File No.:
Drawing No.:
6/4/26 11:44 AM
Sheet 2 of 2

Burkhart Topo Map

Client(s): Alan Burkhart
Allamakee County, Iowa

Assisted By: Michelle.Schaefers
WAUKON SERVICE CENTER

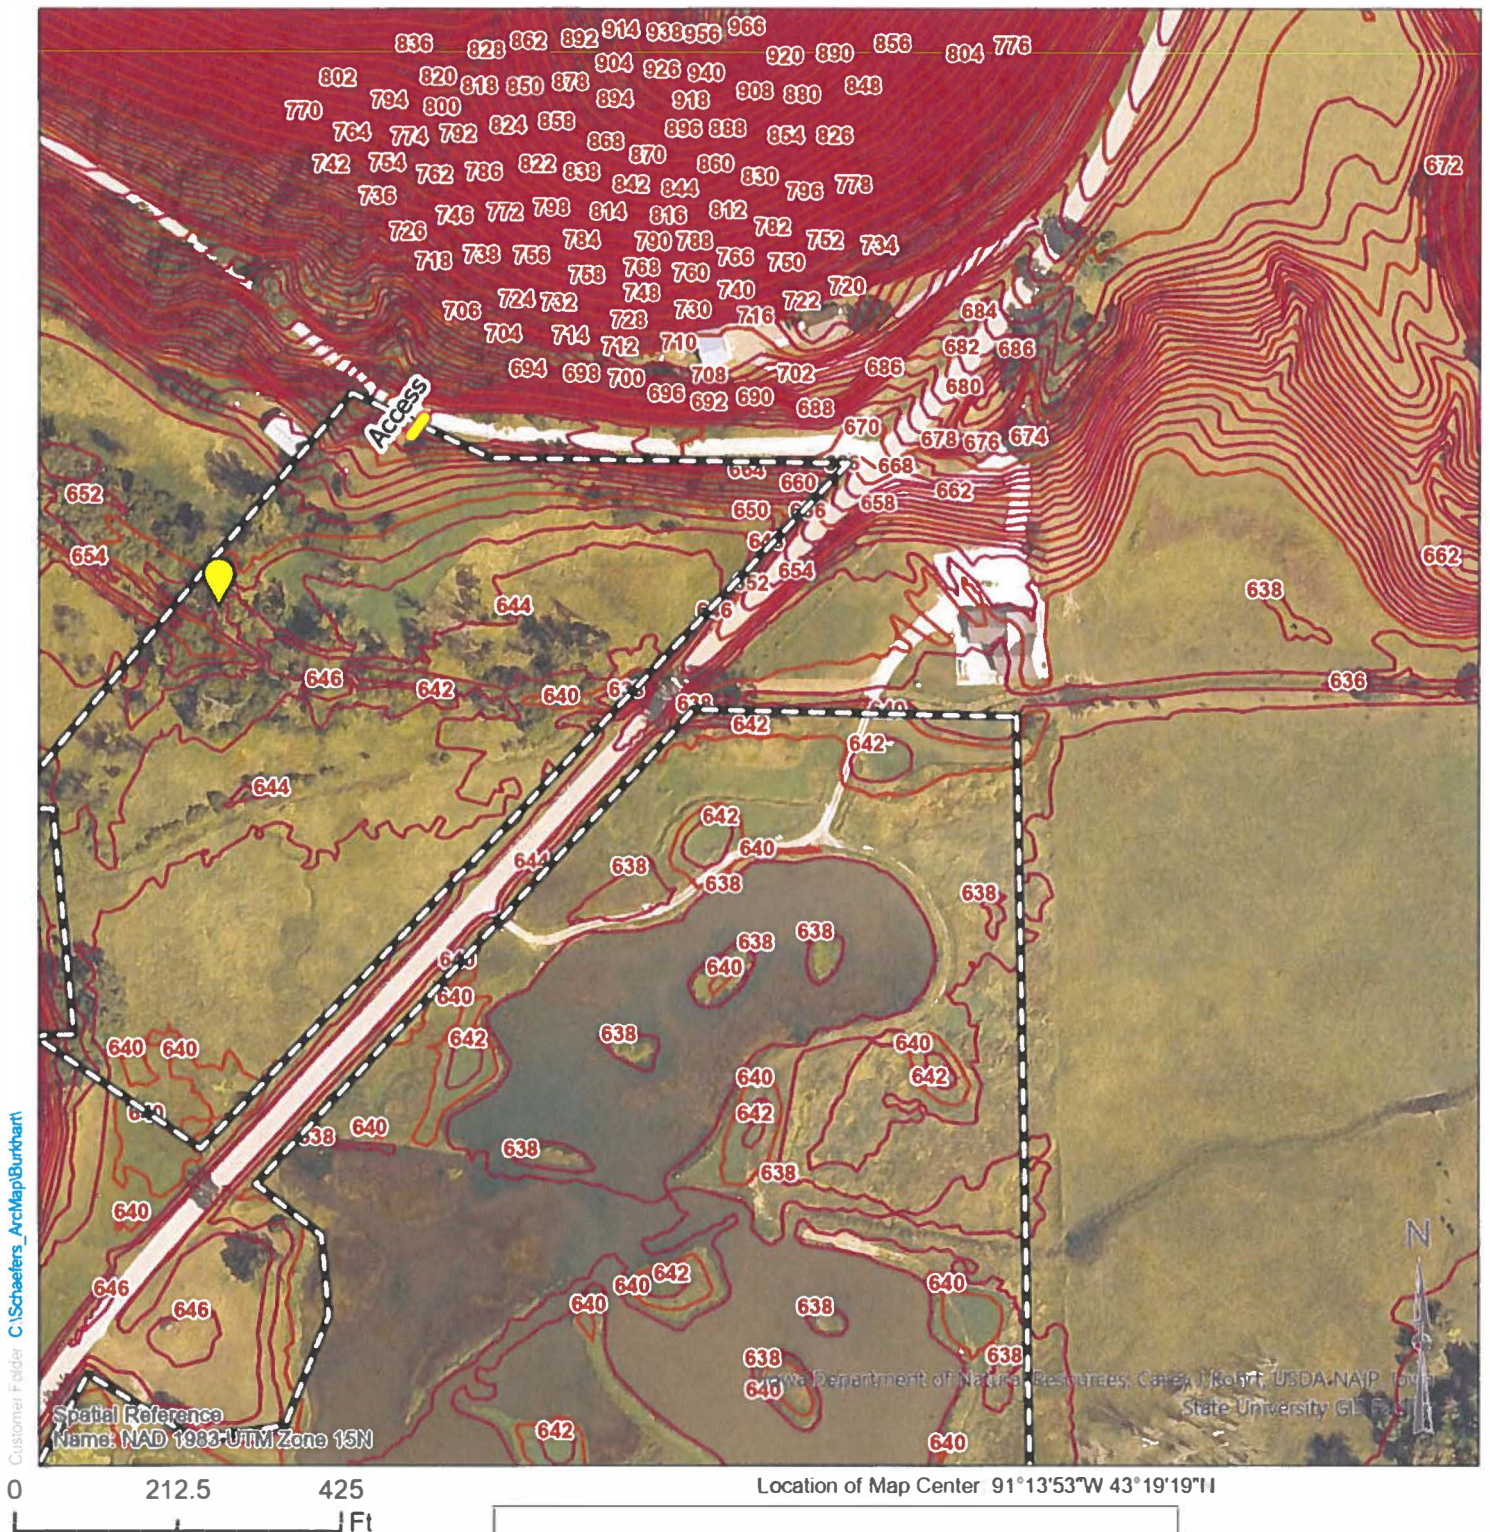

Iowa - NRCS Easements

PROGRAM

 **Burkhart boundary**

2 Foot Contours - 4k



Iowa Department of Natural Resources
Section 401 Water Quality Pre-Filing Meeting and Certification Request Form
Certification Request Form

5. Corps Project Manager*:

Email Address: Savanah.L.Meyne@usace.army.mil

Phone numbers (with area code): Business: 563-723-9176 Cell: _____

*The corps project manager must be cc'ed on the certification request email.

6. Federal Permit / License Requiring Section 401 Water Quality Certificate and its Project Number*

Permit/License Number: 2026-0697 Federal Agency: ☒ Corps of Engineers ☐ FERC

☐ Other: _____

*A copy of the federal permit or license application is **required** to be submitted with a certification request.

7. Include a description of any methods and means proposed to monitor the discharge and the equipment or measures planned to treat, control, or manage the discharge. (Please provide a description of the best management practices you will use to protect water quality as well as any methods and means proposed to monitor the discharge/equipment or measures planned to treat or control the discharge.)

IA-5 Pollution Control Construction Specifications will be followed

Project will be completed during low flow or while the ground is frozen to minimize impacts

8. Dates*

Planned Start Date of Proposed Project: Oct 1, 2026

Planned End Date of Proposed Project: Nov 30, 2026

Approximate date(s) of discharge(s) (if known): _____

*In normal situations, the DNR issues certifications within 90 days. This period of time accommodates internal review and the mandatory public comment period. If your project is scheduled to start sooner, please contact us at Section401WQC@dnr.iowa.gov. Be advised that the DNR is entitled up to six months by law to review certification requests.

9. List all other federal (not listed in #6), interstate, tribal, state, territorial, or local agency authorizations required for the proposed project, including all approvals or denials already received:

Agency	Type of Authorization	Agency Number	Date Applied	Date Approved	Date Denied
IA DNR	Floodplain	2026-1214	08/03/2026	08/04/2026	
IA DNR	Sovereign Lands	2026-1214	08/03/2026	9/17/2026	
Allamakee	Floodplain Dev	<i>Not required as a result of the above DNR</i>			

10. Date Pre-filing Meeting Request was submitted 08/26/2026

11. Certification Request Verification

This request is hereby made for the activities described herein. I hereby certify that all information contained herein is true, accurate, and complete to the best of my knowledge and belief. I have completed the following tasks, as required for the certification request:

- ☒ Cc'ed the Corps contact associated with the proposed project
- ☒ Attached a copy of the federal permit or license application
- ☒ Submitted to pre-filing meeting request at least 30 days ago

I further certify that I possess the authority to undertake the proposed activities. I hereby request that the certifying authority review and take action on this CWA 401 certification request within the applicable reasonable period of time. This application must be signed by the Property Owner/Applicant and the Authorized Agent, if applicable.

Property Owner/Applicant's Name (printed): Alan Burkhart

Property Owner/Applicant's Signature: Alan B. Burkhart Date: 09 28 2020

If applicable: Authorized Agent's Name (printed): Michelle Schaefer

Authorized Agent's Signature: Michelle Schaefer Date: 9/25/26



September 30, 2026 (DRAFT)

Alan Burkhart
16601 230th St.
Hawkeye, IA 52147

Dear Alan Burkhart:

After reviewing your request for State 401 Water Quality Certification (Certification), the Iowa Department of Natural Resources (DNR) has issued the enclosed Certification. Please read the attached conditions carefully before beginning work on the project.

A copy of this Certification has been forwarded to the office of the U.S. Army Corps of Engineers as indicated below.

Please note:

1. Prior to construction, the permittee is responsible for securing such other permits or approvals as may be required by the DNR, federal, state, or local governmental agencies for the project activities described. Issuance of this certification does not relieve you of the responsibility to comply with all local, state and federal laws, ordinances, regulations or other applicable legal requirements.
2. The permittee is responsible for ensuring that whoever performs, supervises, or oversees any portion of the physical work associated with the construction of this project complies with all the terms and conditions of this Certification as well as the associated Section 404 Permit.

If you have any questions about the certification or attached conditions contained therein, my contact information is provided in the certification.

Sincerely,

Brandon Harland
Natural Resource Biologist

cc: Savanah Meyne, Department of the Army Corps of Engineers, Rock Island District
(savanah.l.meyne@usace.army.mil)

IOWA DEPARTMENT OF NATURAL RESOURCES

SECTION 401 WATER QUALITY CERTIFICATION

Certification issued to:

Alan Burkhart
16601 230th St.
Hawkeye, IA 52147

Project certified: U.S. Army Corps of Engineers, No. 2026-0697

Project Description: Concrete Box Culvert Removal from abandoned road and subsequent shaping of side slopes to 3:1 of dry run unnamed tributary to Village Creek. Box culvert is causing log jams on the upstream side during storm events. Storm flow has since cut a new channel around the box culvert. Based on the design, the concrete will be removed offsite and the total area impacted by removal & shaping would be 3,200 sq ft. The vicinity of the Box Culvert is nonhydric and is approx 10ft higher in elevation than the Lansing/Harpers Road to the east and approximately 16ft higher than where it flows into Village Creek.

Project Location: 43.322388/-91.234078, Allamakee County

The Iowa Department of Natural Resources (DNR) has issued this State 401 Water Quality Certification (Certification) pursuant to Section 401 {40 C.F.R. §121}. The U.S. Army Corps of Engineers requires state Certification before a Section 404 permit can be issued.

Subject to the attached conditions, incorporated by reference herein, the DNR has determined that a discharge from the proposed project will comply with water quality requirements of the state of Iowa {567 IAC 61}.

Prepared By/Date Executed: _____

Brandon Harland

Iowa DNR

brandon.harland@dnr.iowa.gov

515-954-9559

6200 Park Ave. Ste. 200, Des Moines, IA 50321

CONDITIONS

- (1) During construction and upon completion of the project, actions must be taken to prevent pollution affecting public health, fish, shellfish, wildlife, and recreation due to turbidity, pH, nutrients, suspended solids, floating debris, visible oil and grease, or other pollutants entering a water of the state. This condition will ensure permittees comply with Iowa's narrative water quality standards found at 567 IAC 61.3(2);
- (2) Equipment used in waters of the state shall be cleaned of all hazardous materials, pesticides, fuels, lubricants, oils, hydraulic fluids, or other construction-related, potentially hazardous substances before arriving on site. Wash water shall not be discharged into a water of the state. This condition will ensure permittees comply with Iowa's narrative water quality standards found at 567 IAC 61.3(2);
- (3) All cleared vegetative material shall be properly managed in such a manner that it cannot enter a water of the state and cause a violation of water quality requirements. This condition will ensure permittees comply with Iowa's narrative water quality standards found at 567 IAC 61.3(2);
- (4) All construction debris shall be properly managed in such a manner that it cannot enter a water of the state. This condition will ensure permittees comply with Iowa's narrative water quality standards found at 567 IAC 61.3(2);
- (5) Erosion shall be managed so that sediment is not discharged to a water of the state in a manner that causes a violation of water quality requirements. This condition will ensure permittees comply with Iowa's narrative water quality standards found at 567 IAC 61.3(2);
- (6) Riprap, treated lumber products, and temporary structures shall consist of clean material free of coatings of potentially hazardous substances. No asphalt or petroleum-based material shall be used as or included in material placed in any water of the state or within the high-water table. This condition will ensure permittees comply with Iowa's narrative water quality standards found at 567 IAC 61.3(2); and
- (7) Stockpiled dredged materials on the shore shall be managed so that sediment is not discharged to a water of the state in a manner that causes a violation of water quality requirements. This condition will ensure permittees comply with Iowa's narrative water quality standards found at 567 IAC 61.3(2).