

Final Report

**Guidelines for Numerical Modeling
in Tier 3 Assessments and Other
Corrective Actions**

Submitted to:

Scott Scheidel, Administrator

IOWA COMPREHENSIVE PETROLEUM UNDERGROUND STORAGE TANK FUND BOARD

AON Risk Services, Inc.

2700 Westown Parkway, Suite 320

West Des Moines, IA 50266

by:

You-Kuan Zhang^{1*} and Richard Heathcote²

¹ Department of Geoscience

/Iowa Institute of Hydraulic Research, and

Department of Civil and Environmental Engineering

University of Iowa, Iowa City, IA 52242

² Iowa Department of Justice, Des Moines, IA 50319

** Corresponding author*

TEL: (319) 335-1806

FAX: (319) 335-1821

e-mail: you-kuan-zhang@uiowa.edu

July, 2001

CONTENTS

	SUMMARY -----	2
I.	INTRODUCTION -----	3
II.	NUMERICAL MODELING PROTOCOL -----	5
III.	NUMERICAL MODELING REPORT -----	12
IV.	NUMERICAL MODELING EXAMPLES -----	15
	A. Climbing Hill -----	16
	B. Ida Grove -----	32
	C. Cook Park -----	50
V.	FINAL THOUGHTS -----	81
	REFERENCES -----	82

EXECUTIVE SUMMARY

Responsible parties have the option of using sophisticated computer models of groundwater at RBCA Tier 3 to assess in detail leaking underground storage tank sites that have been determined to be high risk after Tier 2 assessment. Engineers and geoscientists might also resort to such models in the design of a remediation system. Because of the wide range of possible Tier 3 approaches, there is no section of rules in the Iowa Administrative Code setting out Tier 3 modeling procedures. The rules do require that any such modeling must be shown to be valid before IDNR will approve a work plan or accept a Tier 3 report. This document aims to provide guidance for consultants who contemplate using a numerical modeling program such as Visual MODFLOW or GMS. The guidance stresses how one should approach a modeling project and how to report the results. The need to include in a report all details of the multi-step modeling process is treated. Three examples of numerical modeling of petroleum releases are provided from the western Iowa towns of Climbing Hill, Ida Grove, and Sioux City. The examples are not complete modeling reports of the type described in the text, but are included to show the degree of detail needed to accomplish such a project and to demonstrate validity to IDNR.

I. INTRODUCTION

When environmental risk at a leaking petroleum underground storage tank (LUST) site is characterized as high after a Tier 2 assessment, one of the options available for proceeding with obligatory corrective action is to do more realistic modeling of the site at Tier 3 to determine whether the over-simplifications inherent in the Tier 2 model are causing a false high risk condition. Modeling at Tier 3 can thus involve collecting site-specific information for various contaminant fate and transport parameters and employing this new information in numerical or analytical models that are more sophisticated than the one-dimensional analytical model in the IDNR software mandated for Tier 2 assessment. (567 IAC 135, section 11.2).

Modeling assessments at Tier 3 are advantageous for site owners and operators in situations where expensive corrective action would be required based on Tier 2 results, and where the Tier 2 model with default values for fate and transport parameters (567 IAC 135 Appx. A & B) does not reasonably reflect the hydrogeological conditions. Clearly, there will be significant expense in gathering additional site information. New monitor wells will likely be needed, with sophisticated soil and groundwater sampling to determine parameters such as soil-water partition coefficient and biodegradation rate constant. Additionally, for numerical or computer modeling of the groundwater and contaminant movement, much professional time will be required in information gathering, model set-up, model calibration, and report preparation. So the owner or operator of a LUST site, together with their certified groundwater professional, must balance the expense of Tier 3 modeling against other corrective action options. If the situation appears to justify a Tier 3 modeling approach, the groundwater professional has a range of models from which to choose. The report by Zhang et al. (2001) evaluates various

groundwater models or computer packages for Tier-3 numerical modeling and the groundwater professional is referred to that document for selecting modeling software. The current report provides guidelines for the groundwater professional on how to model a LUST site with any computer modeling software. Protocol for a Tier 3 modeling project is detailed and the outline of a modeling report is presented. Three examples of numerical modeling, arranged in order of increasing complexity, are provided. Examples in this report were done with the GMS software version 3.1 (Brigham Young Univ. EMRL. 2000). Guidelines for site assessment procedures at Tier 3 are available from IDNR (Lovanh *et al.*, 2000).

In this report, it is assumed that the groundwater professional has evaluated all feasible options for corrective action after the site of interest failed Tier 2 pathways, and has determined that building and calibrating a numerical model of the site is a necessary step toward obtaining eventual No Action Required status. In essence, this means that the groundwater professional thinks that numerical modeling is the most cost-effective way to demonstrate plume behavior or predict the efficacy of a particular active or passive corrective action.

The example models presented were developed from real LUST situations in western Iowa. The reader is cautioned, however, against basing any decisions concerning the sites on these modeling results. These models were prepared primarily as examples for this report, and are not guaranteed by the authors to be complete for all purposes.

II. NUMERICAL MODELING PROTOCOL

There are a number of steps involved in a numerical modeling project. The following is a modeling protocol with explanations for each of the steps involved. Additional discussion of these steps and a broader perspective on the philosophy of numerical modeling is found in Anderson and Woessner (1992).

Step 1: Purpose Establishment The first step in a modeling project, whether it be a Tier 3 assessment involving numerical modeling, or a passive natural attenuation design for a petroleum release, is to establish the purpose of using a groundwater model. Prior to proposing a modeling effort, a groundwater professional must have a clear understanding, in consultation with his or her client, the IDNR, and the ICPUST Fund Administrator, of what is needed at a site to obtain, for example, a “No Action Required” (NAR) designation, or to demonstrate that no high risk condition exists, or to demonstrate that natural attenuation is a viable corrective action alternative. A model can be used, for example, to show what effect a new pumping well might have on a nearby benzene plume, or what effect turning-off an existing water well might have on plume migration, or how source removal might enhance plume degradation.

Step 2: Hydrogeological Characterization Proper characterization of the hydrogeological conditions at a site is necessary in order to understand the importance of relevant flow or solute transport processes. With the increase in the attempted application of intrinsic remediation as a remedial action, it is imperative that a thorough site characterization be completed. This level on characterization requires more field work, including more monitoring wells, groundwater samples, and an increase in the number of laboratory analyses to determine important field parameters. Without proper site characterization, it is not possible to select an

appropriate model or develop a reliably calibrated model. The following hydrogeological and geochemical information must be available for this characterization:

- Regional geologic data depicting subsurface geology.
- Topographic data (including surface-water elevations).
- Stream-discharge (base flow) data (if water budgets are of interest).
- Well construction diagrams and soil boring logs.
- Geologic cross-sections drawn from soil borings and well logs.
- Measured hydraulic-head data for several years.
- Estimates of hydraulic conductivity derived from aquifer and/or slug test data.
- Location and estimated flow rate of groundwater sources and sinks.
- Identification of chemicals of concern in contaminant plume.*
- Vertical and horizontal extent of contaminant plume.*
- Location, history and mass loading or removal rate for contaminant sources or sinks.*
- Direction and rate of contaminant migration.*
- Identification of downgradient receptors. *
- Partition coefficient (Kd) or organic carbon content of sediments.*
- Appropriate geochemical field parameters (e.g. dissolved oxygen, other electron acceptors, Eh, pH, degradation byproducts)*

(Those marked with ‘*’ are required for certain fate and transport models.) This information should be presented in maps, tables or graphs in a report documenting model development.

Step 3: Model Conceptualization Model conceptualization is the process in which data describing field conditions are assembled in a systematic way to demonstrate groundwater flow and contaminant transport processes at a site. The model conceptualization aids in determining both the modeling approach and which model software to use. Questions to ask in developing a conceptual model include, but are not limited to:

- Are there adequate hydrogeological data to describe the conditions at the site?
- In what direction is groundwater moving?
- Can the groundwater flow or contaminant transport be characterized as one-, two- or three-dimensional?
- Is the hydrogeologic system composed of more than one aquifer, is vertical flow between aquifers important?
- How does recharge to the aquifer occur: by precipitation, or by leakage from a river, drain, lake, or infiltration pond, or a combination of these?
- Is groundwater leaving the aquifer by seepage to a river or lake, flow to a drain, or extraction by a well? Is evapo-transpiration important?

- Does it appear that the aquifer hydrogeological characteristics remain relatively uniform, or do geologic data show significant variation over the site?
- Have the boundary conditions been defined around the perimeter of the model domain, and do they have a hydrogeological or geochemical basis?
- Do groundwater flow or contaminant source conditions remain constant, or do they change with time?
- Are there receptors located generally down-gradient of the contaminant plume?
- Are the geochemical processes taking place in onsite groundwater fully known?

Other questions related to site-specific conditions may be asked. This conceptualization step must be completed and described in the model documentation report.

Step 4: Model Design In the model design all parameters needed to run a model are set, this step should emphasize the rationale for modeled parameter values. Listing of all variations of a parameter throughout the model is not necessary. Data gaps, anomalies, or uncertainties should be discussed. The input parameters include the following for each model layer:

- Model grid size and spacing
- Layer elevations
- Boundary conditions
- Hydraulic Conductivity/Transmissivity
- Recharge
- Transient or steady state modeling
- Dispersion coefficients
- Degradation rate and sorption coefficients; porosity and bulk density.

Step 5: Model Calibration Model calibration consists of changing values of model input parameters in an attempt to match field conditions within some acceptable criteria. The calibration process applies to both steady-state and transient simulations. With steady-state simulations, there are no observed changes in hydraulic head or contaminant concentration with time for the field conditions being modeled. Transient simulations involve the change in hydraulic head with time (e.g. aquifer test or an aquifer stressed by a well field). Transient models may be calibrated without simulating steady-state flow conditions, but this involves

additional complexity. Data describing field conditions may consist of measured hydraulic heads, groundwater or streamflow rates, or contaminant plume migration rates. Model calibration requires that field conditions at a site be properly characterized. Lack of proper site characterization may result in a model calibrated to a set of conditions that are not representative of actual field conditions.

At a minimum, for LUST sites, comparisons should be made between model-simulated conditions and field conditions for the following data:

- Hydraulic head data
- Groundwater-flow direction
- Hydraulic-head gradients
- Contaminant migration rates
- Contaminant migration directions
- Contaminant concentrations

These comparisons should be presented in maps, tables, or graphs. Each modeler and model reviewer will need to use their professional judgment in evaluating the calibration results. For initial assessments, it is possible to obtain useful results from models that are not calibrated. The application of uncalibrated models can be very useful as a screening tool or in guiding data collection activities.

Calibration is typically characterized for matching the modeled hydraulic head and contaminant concentrations with observed ones. There are no universally accepted "goodness-of-fit" criteria that apply in all cases. However, it is important that the modeler make every attempt to minimize the difference between model- simulated and field conditions. A reasonably good calibration for the head at a particular monitor well might be within one foot of observed head, with a RMS (root-mean-square) error of 5%. For the contaminant parameter, good calibration might be modeled benzene concentration at the well within 500 ug/L of latest observed sample results.

Another parameter that can be calibrated is the water budget. This is a balance sheet of the amount of water entering and leaving a modeled system. For fate and transport models of LUST sites, calibration of a water budget for the flow domain is generally not necessary. Such an effort would require quantitative knowledge of recharge, and of water movement at all domain and layer boundaries and would require an extensive observation well network and instrumentation of any streams in the domain. It is enough for most LUST site modeling to demonstrate (through calibration) that hydraulic heads, flow directions and gradients, and contaminant concentrations around the site of interest match real site observations.

Step 6: Sensitivity Analysis A sensitivity analysis is the process of varying certain poorly constrained model input parameters over a reasonable range (range of uncertainty in value of model parameter) and observing the relative change in model response. Typically, the observed change in hydraulic head, flow rate or contaminant transport are noted. The purpose of the sensitivity analysis is to demonstrate the sensitivity of the model simulations to uncertainty in values of model input data. The sensitivity of one model parameter versus other parameters is also demonstrated. Sensitivity analyses are also beneficial in determining the direction of future data collection activities. Data for which the model is relatively sensitive would require future characterization, as opposed to data for which the model is relatively insensitive. These data would not require further field characterization.

Step 7: Predictive Simulations A model may be used to predict some future groundwater flow or contaminant transport condition. The model may also be used to evaluate different remediation alternatives, such as hydraulic containment, pump-and-treat or intrinsic remediation and to assist with risk assessment. In order to perform these tasks, the model, whether it is a groundwater flow or solute transport model, must be reasonably accurate, as

demonstrated during the model calibration process. However, errors and uncertainties in a groundwater flow analysis and solute transport analysis make any model prediction no better than an approximation. For this reason, all model predictions should be expressed as a range of possible outcomes that reflect the uncertainty in model parameter values.

Step 8: Performance Monitoring Plan Groundwater models are commonly used to predict the hydraulic performance of a groundwater system or the migration pathway and concentrations of contaminants in groundwater. The accuracy of model predictions depends upon the degree of successful calibration of the model in determining transport flow directions or chemical reactions, and the applicability of the groundwater flow and solute transport equations to the problem being simulated. Errors in the predictive model, even though small, can result in gross errors in solutions projected forward in time. Performance monitoring is required to compare future field conditions with model predictions.

The degree of monitoring needed to compare future field conditions with model predictions depends on the level of confidence in the model results and the associated level of risk to the downgradient receptors. The length of the performance-monitoring period should be based, in part, on model predictions, but more importantly on actual laboratory analytical data, trends in analytical data from the sampling events, and on professional judgement.

The performance-monitoring plan should include proposed well locations, screen locations, pumping rates, etc. A monitoring plan should be part of most reports because any predictions must be viewed as estimates, dependent upon the quality and uncertainty of the input data. The physical processes governing groundwater flow, solute transport and parameters used as model input can only be approximated. Models may be used as predictive tools, however field monitoring must be incorporated to verify model predictions.

III. NUMERICAL MODELING REPORT

A numerical modeling report details a groundwater model developed for a specific purpose, for a specific LUST site. Each of the steps in the modeling process should be described in sufficient detail so that the model reviewer may determine the appropriateness of the model for the site or problem that is simulated. The report must include the following information:

- A description of the purpose of the model application.
- Presentation of the hydrogeologic data used to characterize the site.
- Documentation of the source of all data used in the model, whether derived from published sources or measured or calculated from field or laboratory tests.
- Description of the conceptual model.
- Identification of the model package selected to perform the task, its applicability and limitations. A discussion of the modeling approach (steady-state vs transient; continuous source vs decaying source, etc.).
- Documentation of all calculations.
- Summary of all model calibration, history matching and sensitivity analysis results.
- All model predictive simulation results presented as a range of probable results given the range of uncertainty in values of model parameters.

The following sections should be included, as appropriate, in a modeling report. In some cases, additional information may be necessary to convey a complete understanding of the groundwater model.

- Title Page
- Table of Contents
- List of Figures
- List of Tables
- Executive Summary
- Introduction
- Objectives
- Hydrogeologic Characterization
- Groundwater Flow Modeling
 - Model Conceptualization and Design
 - Input parameters
 - Calibration
 - Sensitivity Analysis
 - Predictive Simulations

- Contaminant Transport Modeling
 - Model Conceptualization and Design
 - Input parameters
 - Calibration
 - Sensitivity Analysis
 - Predictive Simulations
- Performance-Monitoring Plan
- Summary and Conclusions
- References
- Well Data
- Additional Data

The tables and figures should be placed wherever they are needed to demonstrate clearly the author's purposes. The following is a list of tables that should appear within the body of the model documentation report or in attached appendices:

- Well and boring log data including:
 - Well name
 - XY coordinate data in the model.
 - Top of casing.
 - Ground elevation.
 - Well screen interval and layer designation.
 - Piezometric elevation data.
 - Bottom of layer elevations.
 - Hydraulic conductivity/transmissivity.
 - Groundwater quality chemical analyses, if appropriate.
 - Aquifer test or slug test data.
- Model calibration result showing a comparison of measured and simulated calibration targets and residuals.
- Results of sensitivity analysis showing the range of adjustment of model parameters and resulting change in hydraulic heads or groundwater flow rates.
- Other data, not listed above, may lend itself to presentation in table format.

The following is a list of the types of figures (maps or cross sections) that should be included in the model documentation report:

- Regional location map with topography.
- Site map showing soil boring and well locations, and site topography.
- Geologic cross sections.
- Map showing the measured hydraulic-head distribution.
- Maps of top and/or bottom elevations of aquifers and confining units.

- Areal distribution of hydraulic conductivity/transmissivity.
- Map of areal recharge (if appropriate).
- Simulated hydraulic-head maps.
- Contaminant distribution map(s) and/or cross sections showing vertical distribution of contaminants (if appropriate).
- Map showing simulated contaminant plume distribution (if appropriate).

Other types of information, not listed above, may be presented in graphic format. Figures that are used to illustrate derived or interpreted surfaces such as layer bottom elevations and hydraulic-head maps should have the data used for the interpolation also posted upon the figure.

IV. NUMERICAL MODELING EXAMPLES

Three sites, Climbing Hill, Ida Grove, and Cook Park, are simulated as examples. All three sites are located in the west of Iowa (Figure 1). Modeling complexity is simplest at Climbing Hill and most complicated at Cook Park. The examples given are not in the complete format for a modeling report as outlined above, but are provided to show how the basic elements of modeling objectives, site characterization, and model design are used to build LUST site models, and show the degree of detail involved in model reporting. The conceptual approach in GMS v.3.1 was used for the modeling task. This software was selected after evaluating several computer software packages for RBCA Tier-3 assessment (Zhang, et al., 2001). All models are steady-state simulations of groundwater flow onto which a transient simulation of contaminant transport is conducted. In all examples the meter or foot is the unit of length, day is the unit of time, and ug/L is the unit of contaminant concentration.

Coordinates are given for features in the models in some of the tables. There are two coordinate systems in each model, one is an X-Y system in meters, based on a world map, the other is an I-J-K index system for individual cells of the three-dimensional model grid created in MODFLOW and MT3DMS. The world coordinates for the modeled locations were obtained with the help of Mary Howes and Paul Liu of the Iowa Geological Survey Bureau. For the model cells, the I-J origin is at the upper left of the grid, and the layer is denoted by K.

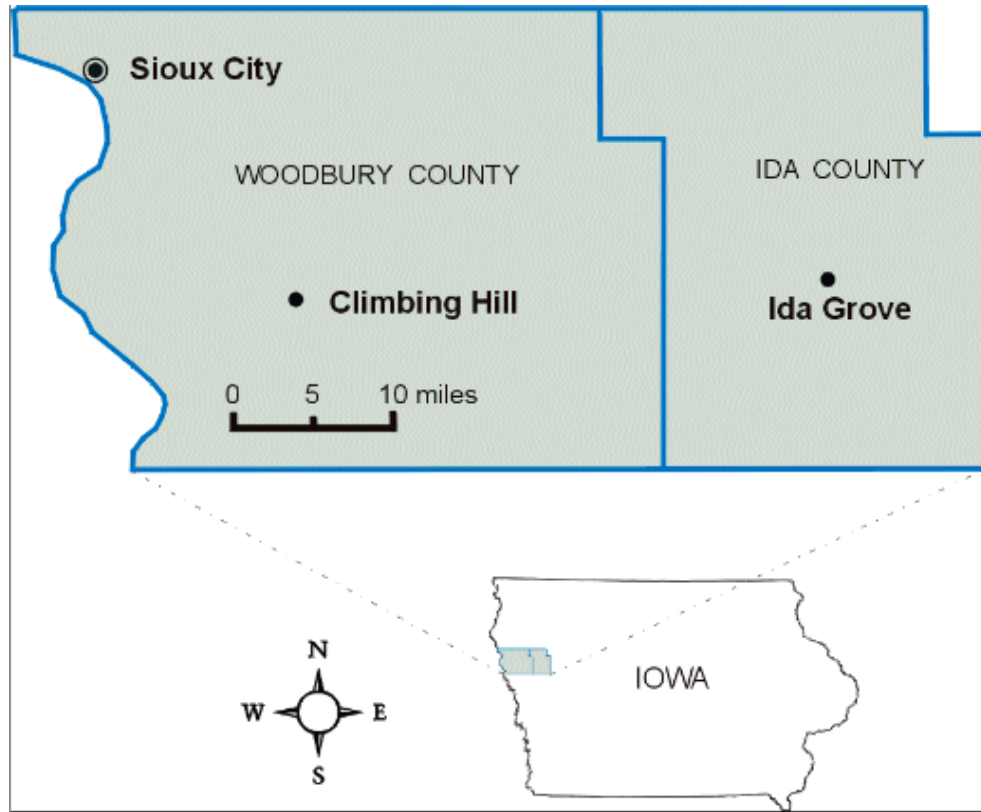


Figure 1 Locations of the three sites in Iowa

A. Climbing Hill

A.1 Statement of Problem

The town of Climbing Hill is located in central Woodbury County, on the lower slope of an upland that rises east of the West Fork of the Little Sioux River. The town has some small, private water supply wells that produce from thin, sandy layers at depths of about 75 ft. The producing zone is stratigraphically at the contact between Pre-Illinoian till and overlying loess. Other wells go into a sandstone layer beneath a shale layer in the Cretaceous Age Dakota Formation (Fm.) that directly underlies the Pre-Illinoian till. Petroleum contamination has

shown up in several of the water wells screened in the shallower sandy interval; petroleum contamination has not been found in water wells screened in the Dakota Fm.

A.2 Objectives

The purpose of modeling groundwater flow and contaminant transport at Climbing Hill was to determine

- 1) what the regional flow in the area is;
- 2) what effect the residential wells have on the flow;
- 3) what forms a benzene plume and a TEH plume, the latter is simulated as xylene and can be expected to have in the two-layer aquifer.

A.3 Hydrogeologic Characterization

Maps, borehole logs, water level data, other hydrogeological information, and groundwater contaminant concentrations for Climbing Hill are taken from the IDNR LUST files #7LTV89 and 8LTU14. The latter file includes a report entitled “Feasibility Analysis Report” (EnecoTech, 1997) which contains information for several water wells in the town. The petroleum source is located along Woodbury Co. Rd. D-54, near the east end of town. The times and amounts of petroleum releases are uncertain.

According to the Geological Survey Bureau of IDNR, Climbing Hill is within the Loess Hills landform region and the near surface stratigraphy consists of thick loess overlying Pre-Illinoian glacial deposits; both sedimentary packages are of Pleistocene Age. Westward, toward the river, this stratigraphy is complicated by Holocene Age erosional processes and alluvial deposition in the floodplain and terraces. (Jean Prior, written communication, June, 2001).

There is no information available that provides good stratigraphic control of this lateral stratigraphic transition.

The water table is between 20 and 30 ft deep in the loess, and slopes westward. Annual recharge to the water table is not precisely known, but is likely in the range of 2 to 6 inches (0.051 – 0.152 m/y) or 7 – 25 % of annual precipitation. Existing monitor wells are completed in the loess; residential wells are completed in the sand layer underlying the loess.

A.4 Groundwater Flow Modeling

A.4.1 Conceptualization and Design

The simulation domain is a small groundwater basin (Figure A-1), which is bounded by a topographic high or groundwater divide in all directions except to the west. The west boundary is formed by the West Fork Little Sioux River that flows from north to south. The river elevation varies from 329.8 m to 328.4 m along the domain boundary. The river is assumed to be well connected to the aquifers and thus is modeled as constant-head boundary (the red crosses in Figure A-1). There are three unnamed creeks (Creeks 1, 2, and 3) inside the domain, which are modeled with the drain package in MODFLOW.

A three-dimensional, two-layer model was constructed to examine hydraulic behavior and contaminant transport at Climbing Hill. The first layer is for the loess and the second layer is for the thin, sandy layer used as a water source. Figure A-2 is a cross section of the conceptual model. Three wells screened in the thin sand layer are included in the model. These wells are intended to simulate residential water demand, and so are assigned small pumping rates of 18 m³/d (20 gpm for about 4 hrs/d). The wells are located in the grid (Table A-1) at points corresponding to water wells # 4, #6, and #11 in the EnecoTech (1997) document.

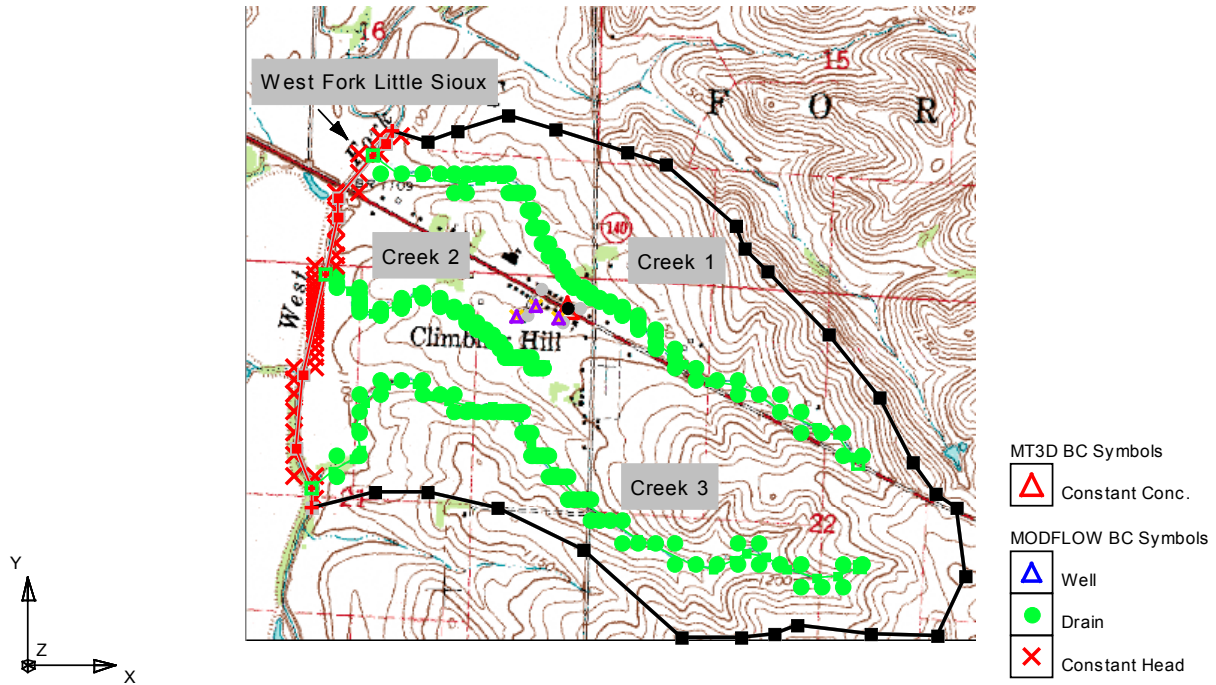


Figure A-1. The simulation domain with boundary conditions at Climbing Hill

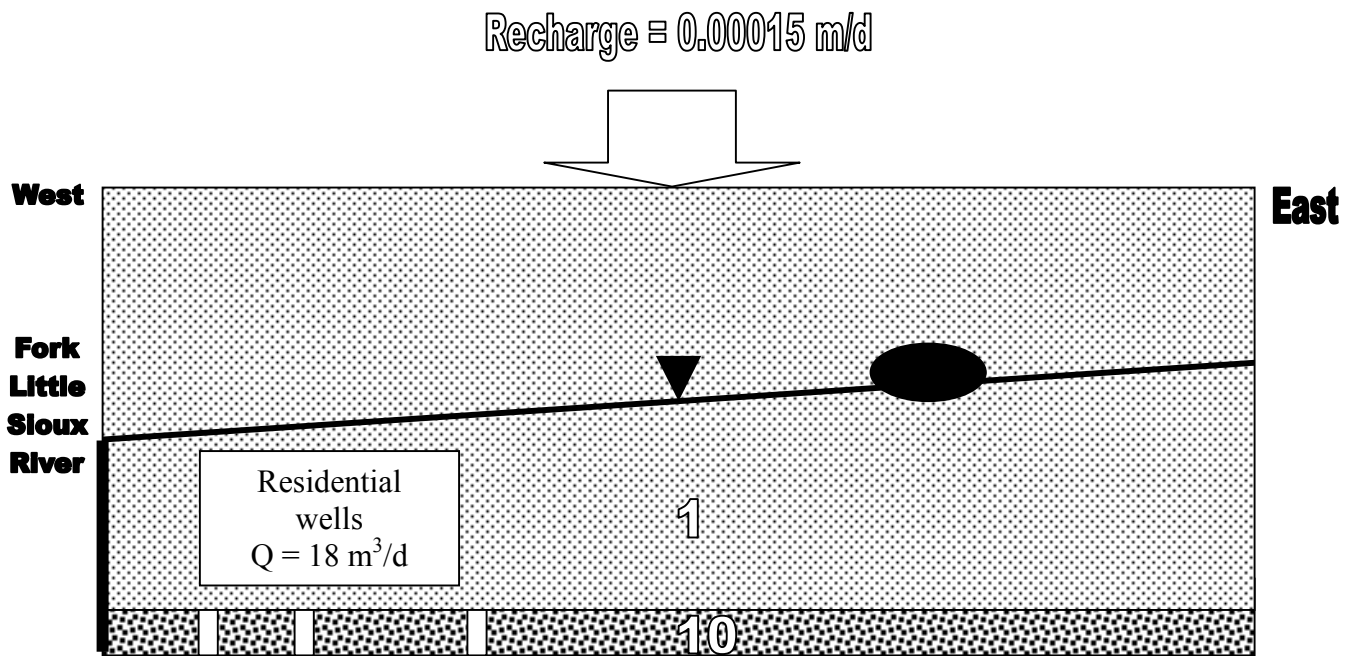


Figure A-2. Schematic E-W cross section of the Climbing Hill conceptual model. Not to scale. Black triangle denotes water table; black oval denotes petroleum source. Numbers within various fields are hydraulic conductivity (m/d) for the unit indicated.

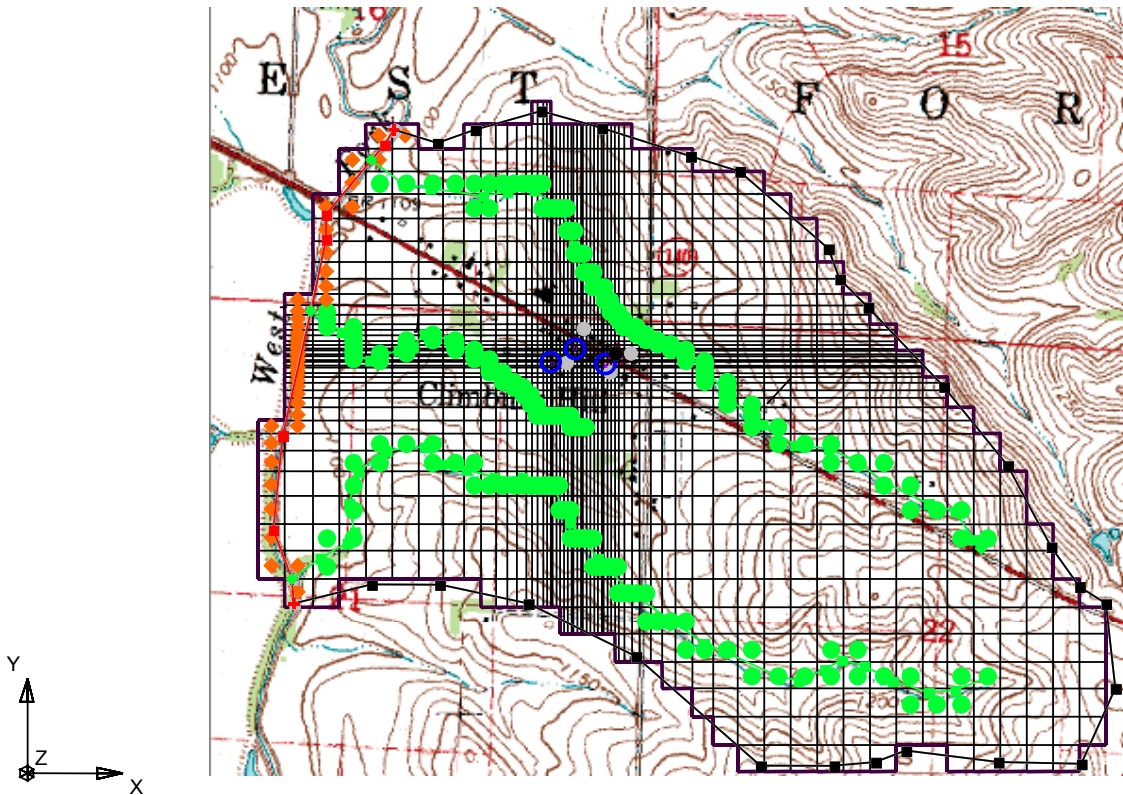


Figure A-3 Finite difference grids of the modeling domain at Climbing Hill

Table A-1. Parameters for grid refinement at the three wells

Well #	Refine grid in X direction			Refine grid in Y direction		
	Base cell size	Bias	Max cell size	Base cell size	Base	Max cell size
4	7.5	1.2	75	7.5	1.2	75
11	7.5	1.2	75	7.5	1.2	75
6	7.5	1.2	75	N/A	N/A	N/A

A.4.2 Input Parameters

Four coverages for the model domain, Source/Sink, Layer 1, Layer 2, and Recharge, were created in GMS. The packages used in MODFLOW are: Basic, BCF, Well, Drain, Recharge, PCG2, and Output Control. The West Fork Little Sioux River is simulated as a constant-head boundary and the three creeks are simulated with the drain package in MODFLOW. The river stage and the bottom elevation and conductance of the three creeks are listed in Table A-2. Table A-3 provides the locations and pumping rates for the three wells.

Table A-2. Input parameters for the river and creeks.

	W. Fork Little Sioux River	Creek 1	Creek 2	Creek 3
Simulated in MODFLOW by	Constant head	Drain	Drain	Drain
River stage (<i>m</i>)	328.4 - 329.8	N/A	N/A	N/A
River or drain bottom elevation (<i>m</i>)	N/A	329.7-371.8	329.2-347.5	328.4-374.9
River or drain conductance (m/day)	N/A	5.0	5.0	5.0

Table A-3 Pumping well locations and rates

Well #	X (<i>m</i>)	Y (<i>m</i>)	I	J	K	Pumping Rate (<i>m</i>³/<i>day</i>)
4	246282	4692159	19	27	2	-18
11	246218	4692121	24	20	2	-18
6	246365	4692116	25	36	2	-18

The loess is simulated with the coverage Layer 1. This layer is treated as an unconfined, horizontal aquifer with bottom elevation at 326.1 m. The thin sandy layer is modeled by the coverage Layer 2 with a uniform thickness of 2.1 m, and is also horizontal. Both layers are treated as homogeneous. The hydraulic conductivity for Layer 1 is one order of magnitude smaller than that of Layer 2 (Table A-4). Hydraulic conductivity is assumed to be isotropic, i.e., $K_h = K_v$.

Table A-4 Input parameters of the layers for groundwater flow modeling

	Layer 1	Layer 2
Aquifer Type	Unconfined	Confined
Top Elevation (<i>m</i>)	400	326.1
Bottom Elevation (<i>m</i>)	326.1	324.0
Horizontal Conductivity, K_h (<i>m/day</i>)	1.0	10
Vertical Conductivity, K_v (<i>m/day</i>)	1.0	10
Net Recharge Rate (<i>m/d</i>)	0.00015	N/A

A.4.3 Model Calibration

The flow model is calibrated against the long-term average of the observed hydraulic heads at eleven monitoring wells by changing the hydraulic conductivity, the net recharge rate, and the conductance of the creeks. The calibration target is set to be within 0.5 m of the observed water levels at eleven monitor wells, and the results are listed in Table A-5. All errors are much smaller than 0.5 m. The Root Mean Square Error is 0.19 m. The calibrated conductance values

are listed in Table A-2, the calibrated hydraulic conductivity values are listed in Table A-4, and the calibrated net recharge rate is 0.00015 m/d (2.1 in/yr). The calibrated steady-state head contours are illustrated in Figure A-4 along with a scatter plot and error summary of the observed versus modeled head at the four monitoring wells.

Table A-5 Calibration results for hydraulic heads at the observation wells

Well #	X (m)	Y (m)	I	J	K	Observed head (m)	Simulated head (m)	Error (m)
MW 7	246265	4692177	17	25	1	334.40	334.37	-0.03
MW 12	246302	4692217	14	29	1	334.40	334.66	0.26
MW 18	246396	4692151	20	39	1	335.50	335.28	-0.22
MW 101	246433	4692151	20	41	1	335.40	335.55	0.15
MW 103	246373	4692101	26	37	1	335.00	335.15	0.15
MW 105	246265	4692128	23	25	1	334.60	334.42	-0.18
MW 106	246348	4692179	17	31	1	335.00	334.94	-0.06
MW 112	246299	4692178	17	29	1	334.40	334.58	0.18
MW 113	246255	4692128	23	24	1	334.50	334.36	-0.14
MW 115	246396	4692136	22	39	1	335.60	335.29	-0.31
MW 118	246337	4692178	17	33	1	335.10	334.86	-0.24
Root Mean Square Error = 0.19								

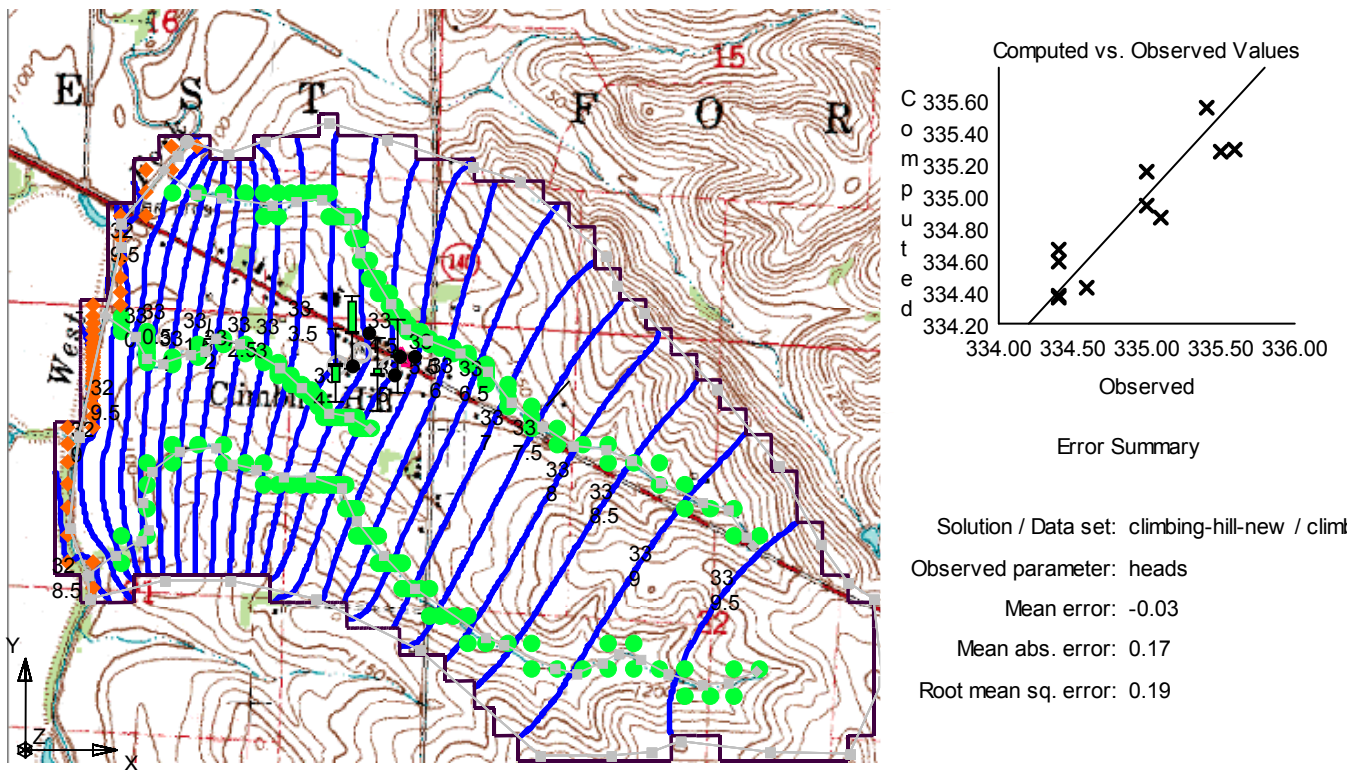


Figure A.4 Steady-state hydraulic head contours with calibration

A.4.4 Sensitivity Analysis

A sensitivity analyses for the Climbing Hill model was carried out by doubling the values of hydraulic conductivities and recharge rate. The simulation results are given in Table A-6, where it is seen that all modeled heads are higher than observed ones. This result is due to the dominance of the low permeability Layer 1 on effective hydraulic conductivity of the hydrostratigraphic sequence. The RMSE increased from 0.19 to 0.64 with the largest error of 0.88 m at MW-12.

Table A-6 Comparison of observed vs. modeled heads with both hydraulic conductivity and recharge rate doubled.

Well #	X (m)	Y (m)	I	J	K	Observed head (m)	Simulated head (m)	Error (m)
MW 7	246265	4692177	17	25	1	334.40	335.5	0.65
MW 12	246302	4692217	14	29	1	334.40	335.28	0.88
MW 18	246396	4692151	20	39	1	335.50	335.92	0.42
MW 101	246433	4692151	20	41	1	335.40	336.15	0.75
MW 103	246373	4692101	26	37	1	335.00	335.83	0.83
MW 105	246265	4692128	23	25	1	334.60	335.11	0.51
MW 106	246348	4692179	17	31	1	335.00	335.59	0.59
MW 112	246299	4692178	17	29	1	334.40	335.26	0.86
MW 113	246255	4692128	23	24	1	334.50	335.05	0.55
MW 115	246396	4692136	22	39	1	335.60	335.93	0.33
MW 118	246337	4692178	17	33	1	335.10	335.52	0.42
Root Mean Square Error = 0.64								

A.5 Contaminant Transport Modeling

The contaminants of concern are benzene and xylene released from LUST site 8LTU14 (the red triangle in Figure A-1). The benzene plume and xylene plume are simulated with MT3DMS in GMS v. 3.1 based on the steady-state groundwater flow condition obtained in Section A.4.

A.5.1 Model Conceptualization and Design

The simulation domain for contaminate transport is the same as that for groundwater flow shown in Figure A-1, with no solute flux across any boundary. The LUST site is treated as an internal constant concentration source with benzene at 14,000 ppb and xylene at 6200 ppb (Table

A-7). These concentrations are the highest reported for the two hydrocarbons from monitor well samples at the source LUST site (8LTU14). The constant source condition represents a conservative scenario even though the times and amounts of petroleum releases from the sources are uncertain.

Table A-7. Source locations and concentrations at the LUST site 8LTU14.

LUST #	X (m)	Y (m)	I	J	K	Benzene Concentration (ppb)	Xylene Concentration (ppb)
8LTU14	246395	4692151	20	39	1	14,000	6,200

A.5.2 Input Parameters

Four packages, Basic, Advection, Dispersion, and Chemical Reactions, are used in MT3DMS. Some of the parameters in the Basic package are listed in Table A-8. One stress period of 3650 days is used. The method of characteristics (MOC) is selected in the Advection package.

Table A-8. Stress period and time step information in Basic package of MT3DMS

Stress period	Stress period length (day)	Max transport steps	Initial time step size	Time step bias	Max time step size
1	3650	20000	365	1	365

The other parameters needed in this simulation are effective porosity (n_e), dispersivity (α), adsorption constant (K_d), and biodegradation rate (λ). These parameters have not been determined from aquifer samples, so assumptions were made based on available data and the

borehole log descriptions. The value for effective porosity is estimated to be 0.2. The value for longitudinal dispersivity (α_x) is estimated based on the minimum plume length (between 8LTR14 and the farthest contaminated monitor well (EnecoTech, 2000) of about 700 ft. The estimation formula of Neuman (1990) yields a value of 73 ft (22 m). However, a value of 15 m is used for α_x because part of large-scale heterogeneity (i.e., layering) that contributes to dispersion has been considered explicitly. Horizontal and vertical transverse dispersivity (α_y) were taken as 0.75 m, and molecular diffusion was neglected since it is much smaller than pore-scale mechanical and macro-dispersion. Uncertainty in dispersivity is addressed in the sensitivity analyses. The distribution coefficient for benzene is $0.081 \text{ cm}^3/\text{g}$ and that for xylene is $0.177 \text{ cm}^3/\text{g}$. These values for K_d were selected to give retardation factors of 1.5 for benzene, and 4.5 for xylene, consistent with behaviors of these compounds in field studies (Wiedemeier et al, 1995). The biodegradation rate was set as 0.0001 day^{-1} for both layers and both contaminants. The values of these parameters are listed in Table A-9.

A.5.3 Model Calibration

A calibration effort in this case would involve systematically adjusting the values of effective porosity (n_e), dispersivities (α_L , α_T), biodegradation rate (λ), and distribution coefficients (K_d) in successive simulations, and comparing the results against the observed concentration at the monitoring wells. The transport model has not been fully calibrated. As the model now stands, the gross plume shapes from the simulations can be compared with mapped contamination from the field data.

Table A-9 Input parameters for contaminant transport modeling

	Layer 1	Layer 2
Effective Porosity, n_e	0.2	0.2
Longitudinal Dispersivity, α_L (m)	15	15
Transverse Dispersivity, α_T (m)	0.75	0.75
Biodegradation Rate, λ (day^{-1})	0.0001	0.0001
Bulk density (g/cm^3)	1.86	1.86
Distribution coefficient, K_d (cm^3/g) for Benzene	0.081	0.081
Distribution coefficient, K_d (cm^3/g) for Xylene	0.177	0.177

Figure A-5a illustrates the benzene plume in both layers after 10 years using the parameters listed in Table A-9. Figure A-5b is a close view of the benzene plume shown in Figure A-5a. Figure A-6a is the comparable xylene plume and Figure A-6b is a close view of Figure A-6a. The maximum length and width of the modeled benzene plume in the two layers are listed in Table A-10. The plume boundary is set at the concentration of 100 ppb due to the accuracy of the numerical scheme used in the MT3DMS. It is seen that both the length and width of the plume increase much faster at earlier years than later years and the plume, especially its width, became almost stable after seven or eight years. Actual site monitoring data show that neither benzene nor xylene have ever been detected in the loess layer as far downgradient as MW-7. Nor have they been detected in MW-114 (not listed, located south of MW-113), which provides a constraint on plume spreading. Benzene but not xylene has been detected in residential wells #4 and #11, indicating the contaminant plumes have entered the sand layer down gradient from the source. The lack of contaminant detection in well #6 is a constraint on plume spreading in the sand layer. With a calibrated model, evolution of the

benzene and xylene plumes could be simulated with greater confidence, and predictions about plume behavior could be made.

Table A-10 The length and width of the benzene plume at different times

Time (year)	Layer 1		Layer 2	
	Length	Width	Length	Width
1	125	45	144	55
2	168	55	172	66
3	185	71	188	71
4	186	74	201	73
5	205	78	207	78
6	216	85	226	84
7	228	88	232	90
8	236	92	244	91
9	244	92	252	92
10	252	92	258	92

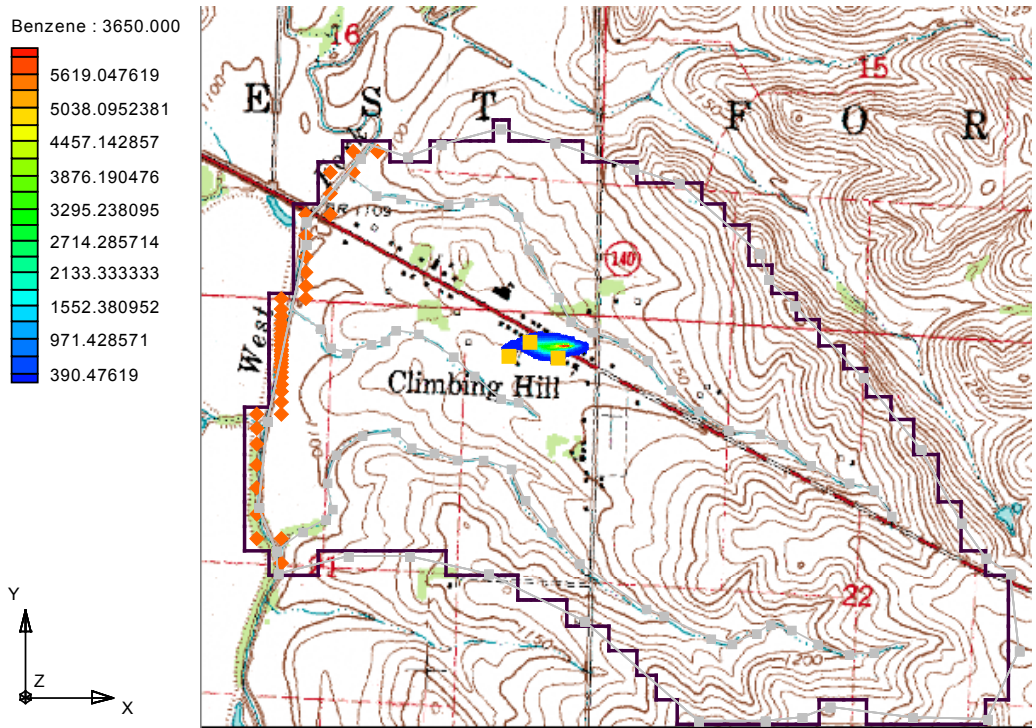
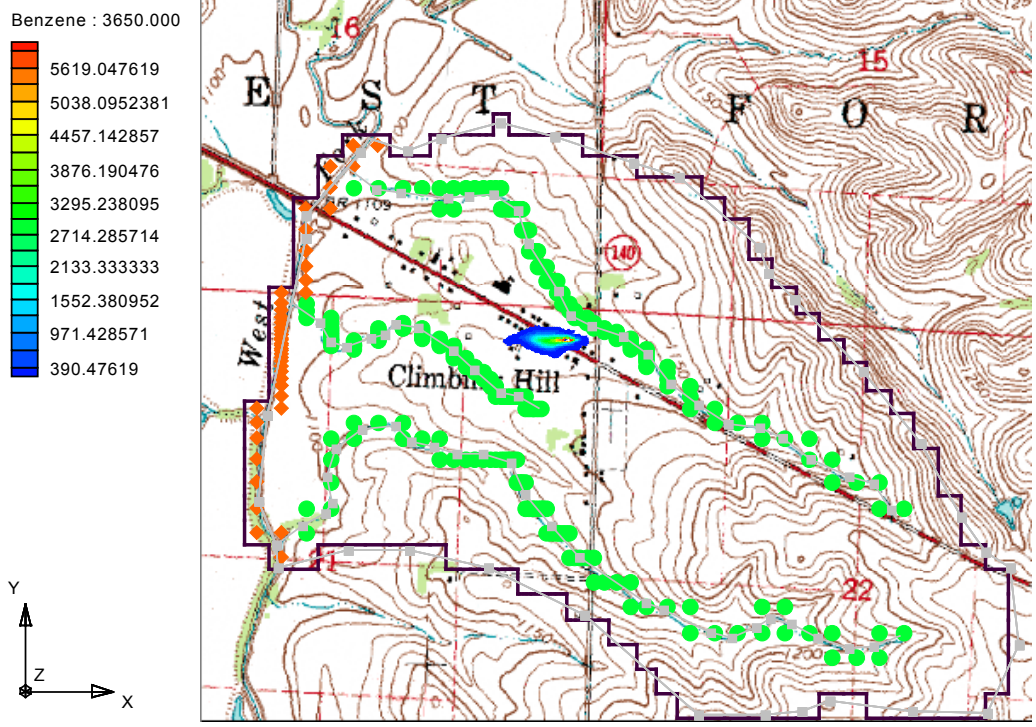


Figure A-5b Benzene concentrations at 3650 days in layer 1 (top) and in layer 2 (bottom)





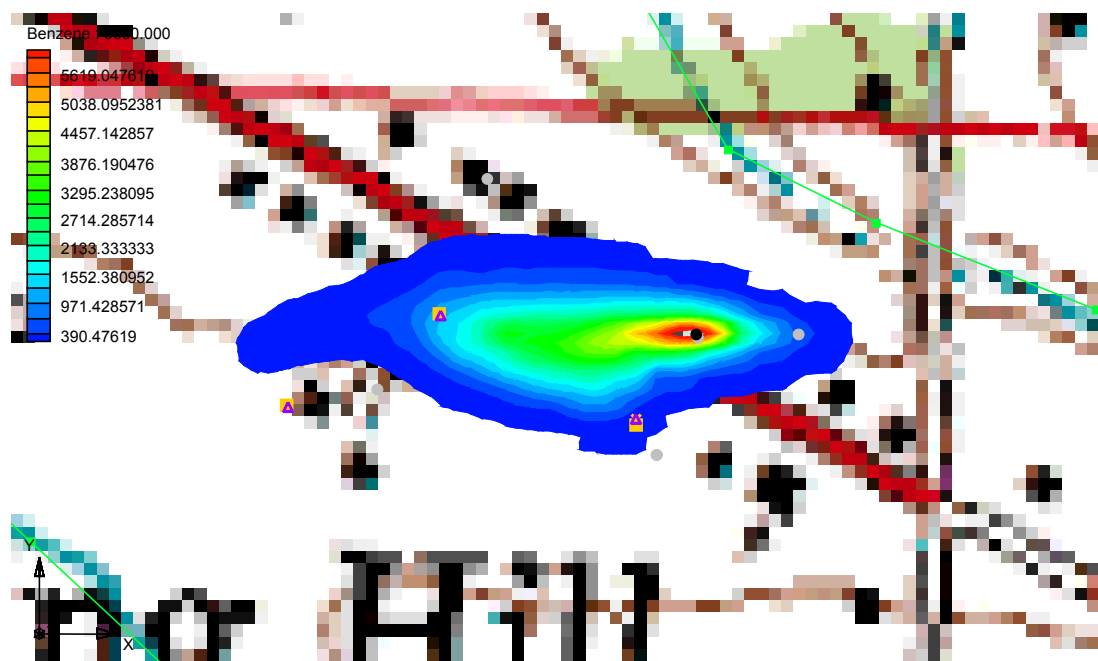


Figure A-5b Close view of Benzene concentrations at 3650 days in layer 1 (top) and in layer 2 (bottom)

Xylene : 3650.000

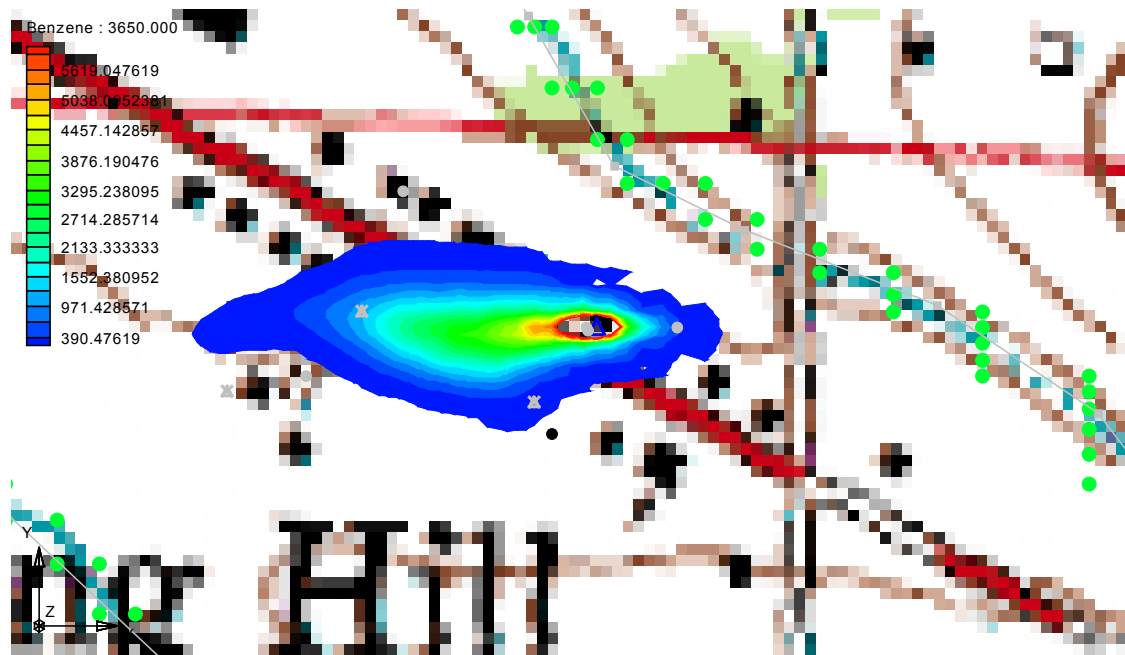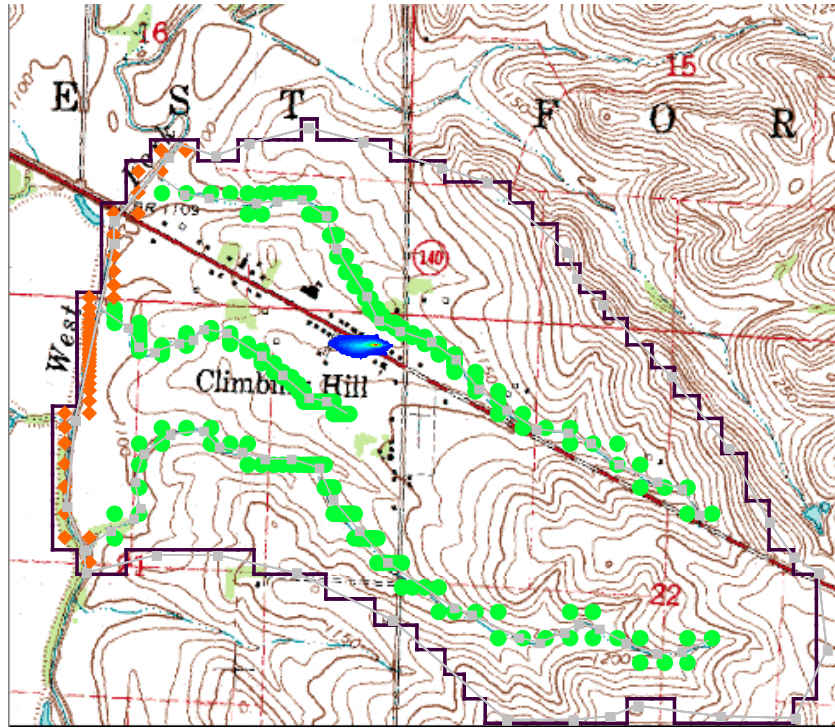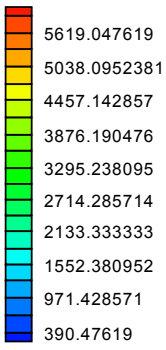

Xylene : 3650.000

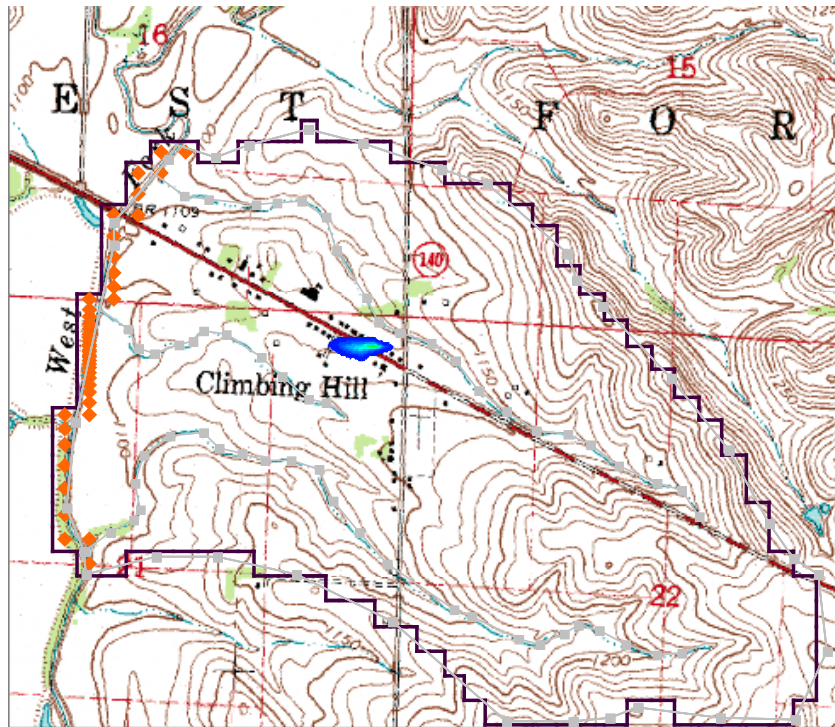




Figure A-6a Xylene concentrations at 3650 days in layer 1 (top) and in layer 2 (bottom)

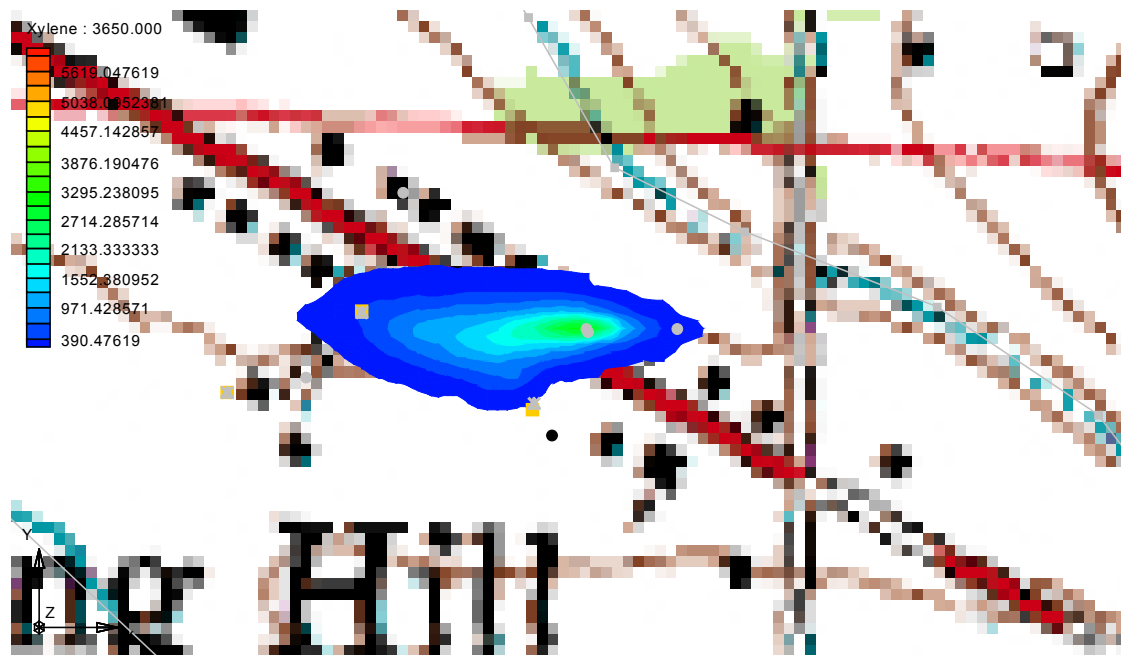
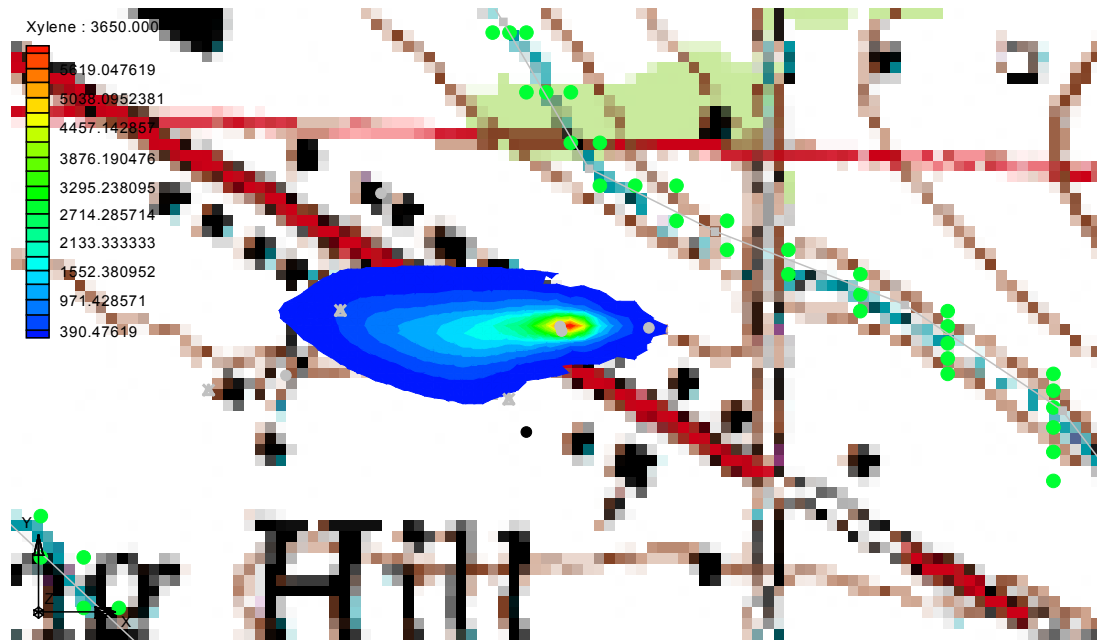


Figure A-6b Close view of xylene concentrations at 3650 days in layer 1 (top) and in layer 2 (bottom)

A.6 Summary and Conclusions

Calibrated results of the flow model indicate hydraulic conductivities chosen for the two layers are reasonable. The recharge value is within the reasonable range for western Iowa. Groundwater flow direction is westward through Climbing Hill in the shallower aquifer. Low capacity residential water wells have little effect on the local groundwater gradient. The location of many of these wells is in the direct, down-gradient position from the contamination source. This fact was the main condition responsible for contamination reaching the water wells. The shale layer separating the shallow, contaminated water source from an underlying sand in the upper portion of the Dakota Fm. appears to be an effective protection of the Dakota Fm.

The stratigraphic configuration of a higher permeability layer beneath a lower permeability layer, together with water wells pumping from the higher permeability layer, creates a condition for vertical flow from the water table toward the underlying layer. Petroleum constituents dissolved in groundwater will be transported downward from the water table into the higher permeability layer. The transport model needs to be further calibrated and its sensitivity to the parameter changes needed to be explored, although initial modeling of the benzene and xylene plume seem to be agree reasonably with observed concentration. If biodegradation is not a discriminating nor particularly influential parameter, benzene can reasonably be expected to migrate at three times the rate of xylene, suggesting that releases of heavier products than gasoline will be strongly retarded.

B. Ida Grove

B.1 Statement of Problem

The city of Ida Grove is located in central Ida County east and south of the confluence of Odebolt Creek with the Maple River (Figure B-1). The part of Ida Grove modeled for this report lies on the floodplain between the two streams. From the ground surface to 5 - 20 ft in depth is a surficial clayey deposit which is underlain by a shallow alluvial sand and gravel aquifer. There also exists a deep alluvial aquifer of about 50 ft thickness that is separated from the shallow aquifer by a 45-50 ft thick clay layer. The deeper aquifer is not included in this model since it has no evident hydraulic influence on the shallow aquifer and the main concern is groundwater contamination by the LUSTs in the shallow aquifer.

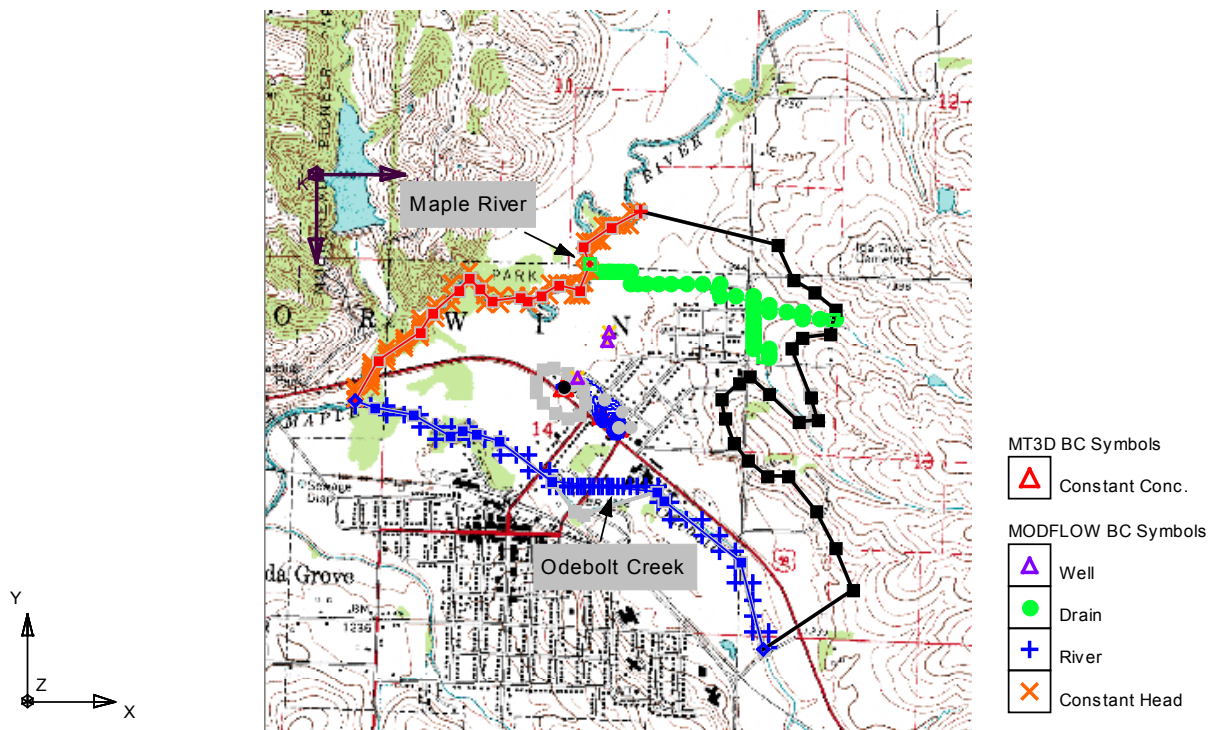


Figure B-1 The simulation domain with wells and sources

The city gets its water from four wells located on the floodplain in and near a petroleum contaminated zone. Two of the wells (#1 & #2) both produce at a rate of 120 gpm (654 m³/d) from the more productive shallow aquifer. These wells pump on average for about 11 hours per day. Two other wells (#5 & #6) produce from the less productive deep aquifer. A fifth well (#3), which produces continuously from the shallower aquifer at a rate of 150 gpm (818 m³/d), has been taken off production for the water supply, but is still pumped to provide hydraulic control of the petroleum plume and to protect the two shallow wells.

There are several LUST sites along US Hwys 59 & 175, and a petroleum contaminated zone extends northwestward for about 1000 ft from the farthest LUST site to well #3 (Figure B-1). Traces of the petroleum contaminant MTBE were found in wells #1 and #2 in samples from March of 1998 and March of 1999, but have not recurred. The petroleum contamination sources have affected the shallow sand and gravel aquifer.

B.2 Objectives

The purpose of modeling groundwater and contaminant transport at Ida Grove was to determine:

- 1) what the groundwater flow system is in the vicinity of LUST sites and city water wells;
- 2) whether city wells 1 and 2 are at risk of drawing the contaminant plume; and
- 3) whether contamination at LUST site 8LTZ58 threatens city well #3.

B.3 Hydrogeologic Characterization

Maps, borehole logs, water level data, other hydrogeological information, and groundwater contaminant concentrations for Ida Grove are taken from the IDNR LUST files

#8LTK99, 8LTA75, 8LTY18, 9LTE96, 8LTZ58, and 7LTB86. Additionally, a report presenting results of a pump test of well #3 (GeoTek, 1995) and a two-dimensional groundwater flow and contaminant transport model (Davis, 1995) were consulted. Another report presenting results of a pump test of the shallow aquifer at a prospective water well site one mile northeast of the current well field was also consulted (Kuehl and Payer, 2000).

According to the Geological Survey Bureau of IDNR, Ida Grove is at a geomorphic boundary between the Northwest Iowa Plains (north of the Maple River), and the Southern Iowa Drift Plain (south and east of the city). Pleistocene Age Pre-Illinoian tills underlie the surface west and north of the Maple River, but Wisconsinan tills (Sheldon Creek Fm.) underlie the surface to the east and south. Loess mantles all of the till terrain. In the river valley, this stratigraphy is complicated by Holocene Age erosional processes and alluvial deposition in the floodplain and terraces. (Jean Prior, written communication, June, 2001). Interbedded sandstones and shales of the Cretaceous Age Dakota Formation underlie the Pleistocene units. Well control is sparse in the region, and the positions of stratigraphic transition from floodplain to terrace to Pleistocene Age deposits are poorly known.

Groundwater in the shallow aquifer in the model domain is recharged by infiltration from rainfall and snowmelt throughout the area and generally flows westward from higher elevation towards the Maple River. Annual recharge to the water table is not precisely known, but is likely in the range of 2 to 6 inches (0.051 – 0.152 m/y) or 7 – 25 % of annual precipitation. The depth to the water table ranges between about 7 and 17 ft (about 2 m to 5 m). Hydraulic conductivity is estimated to range between 90 - 152 m/d from the GeoTek (1995) tests, and between 106 - 136 m/d from the Kuehl and Payer (2000) tests. The range is due in part to a 30 ft uncertainty in aquifer thickness. Storage coefficient was estimated to range between 0.003 -

0.005 from the former tests, and between 0.0002 - 0.002 from the latter tests. Heterogeneity in the shallower aquifer is vaguely indicated on drillers logs for the city well field (“sand-fine to very coarse; coarse to very coarse with boulders.” Julie Sievers, written communication) and for the test wells (interbedded sand, clay, and gravel). Deep monitor wells drilled by GeoTek (1996) along the petroleum plume in Ida Grove also indicate minor, interbedded or lenticular, fine sand and clay heterogeneities in the shallower aquifer, but overall, the unit consistently seems to be coarse grained between depths of about 25 ft and 70 ft.

B.4 Groundwater Flow Modeling

B.4.1 Conceptualization and Design

The simulation domain shown in Figure B-1 is bounded by the Maple River to the northwest and by Odebolt Creek to the southwest. The Maple River is modeled as a constant-head boundary (the red crosses in Figure B-1) assumed to be well-connected with the shallow sandy and gravel aquifer. The river flows from northeast to southwest and its stage at the entering and exit points of the domain are 367.6 m and 366.7 m, respectively. Odebolt Creek is modeled with the river package in MODFLOW (the blue pluses in Figure B-1) to allow for losing and gaining conditions in the flow simulation. The creek has the highest water level of 371.8 m at the east and the lowest of 366.6 when it joins the Maple River. Its water depth plus its bed thickness is estimated as 1.0 m. The conductance of the creek bed per unit length is set at 1.0 m/day. The other boundaries of the domain are all treated as no-flow boundaries: the east portion is interpreted to be the interface between the shallow sand and gravel aquifer and the low permeability till, and the north portion as well as the southeast portion are flowlines.

A three-dimensional, two-layer model of Ida Grove was constructed to examine hydraulic behavior and contaminant transport in the shallow aquifer. The first layer represents the upper portion of the shallow sand and gravel aquifer with a hydraulic conductivity value of 25 m/day. There is a small low-permeable clay zone south of Well 3 within the first layer and the estimated K of that zone is 0.05 m/day. The lower layer is more permeable with K estimated to be 75 m/day. The depth to the groundwater table is usually 3 m and the thickness of the first layer is about 5 m and that of the second layer is 50 m. The conceptual hydrostratigraphy of the domain is shown in Figure B-2. The simulation domain is divided into an irregular grid which is refined at the three wells (Table B-1). The active cells consist of 46 rows, 45 columns, and 2 layers and are shown in Figure B-3.

Table B-1. Parameters for grid refinement at the three well

Well #	Refine grid in X direction			Refine grid in Y direction		
	Base cell size	Bias	Max cell size	Base cell size	Base	Max cell size
1	15	1.2	75	15	1.2	75
2	15	1.2	75	15	1.2	75
3	15	1.2	75	15	1.2	75

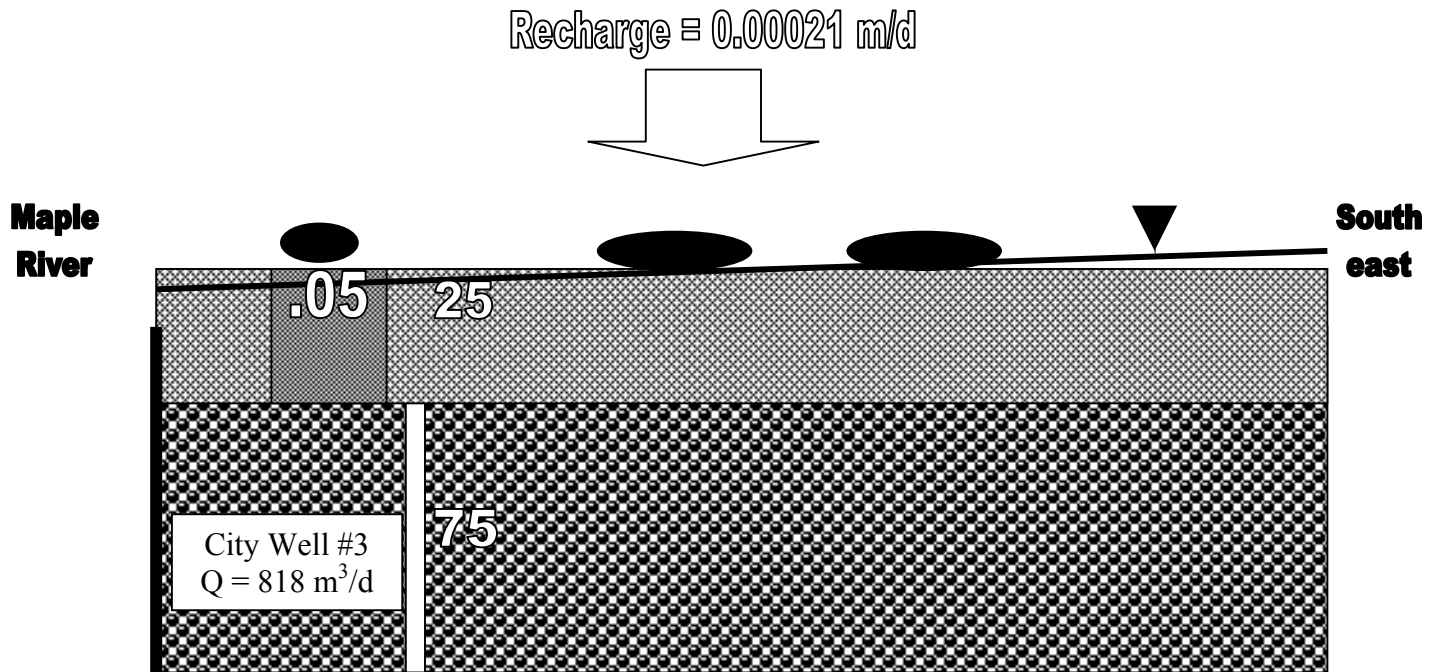


Figure B-2. Schematic NW-SE cross section of the Ida Grove conceptual model. Not to scale. Black triangle denotes water table; black ovals denote petroleum sources. Numbers within various fields are hydraulic conductivity (m/d) for the unit indicated.

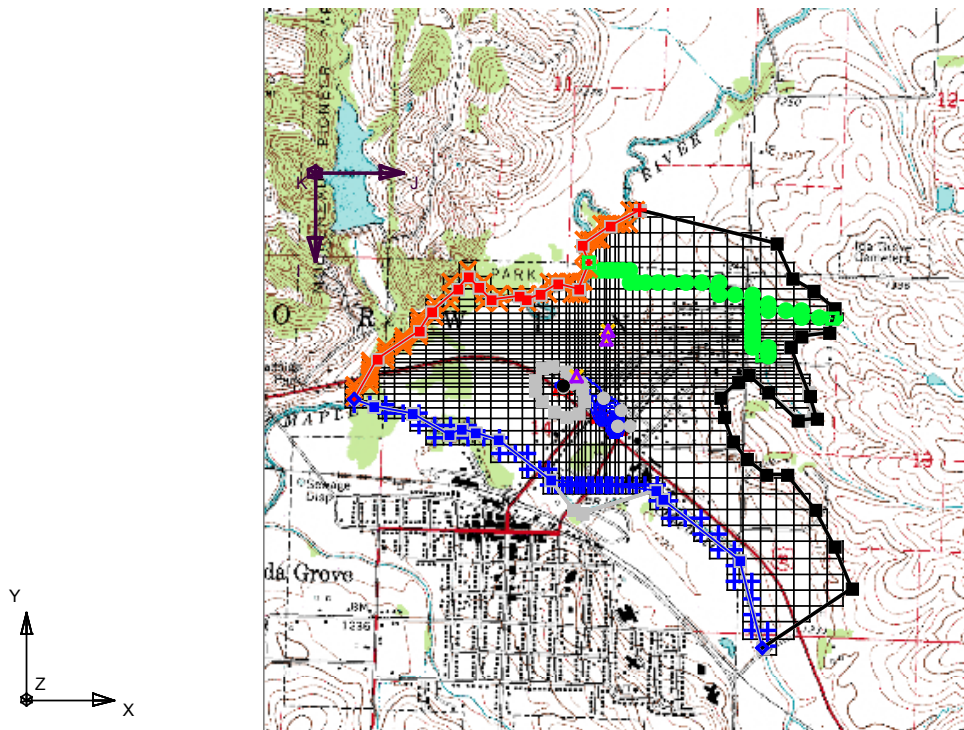


Figure B-3 Finite difference grids of the modeling domain at Ida Grove

B.4.2 Input Parameters

Four coverages for the model domain, Source/Sink, Layer 1, Layer 2, and Recharge, were created in GMS. The packages used in MODFLOW are: Basic, BCF, Well, Drain, Recharge, PCG2, and Output Control. The input parameter values for the Source/Sink coverage are listed in Table B-2 and B-3. Table B-3 also provides the locations and pumping rates for the three wells.

Table B-2. Input parameters for the river and creeks.

	Maple River	Odebolt Creek	Unnamed Creek
Simulated in MODFLOW by	Constant head	River package	Drain package
River stage (<i>m</i>)	366.7 – 367.6	366.7 – 371.8	N/A
River or drain bottom elevation (<i>m</i>)	N/A	365.7 – 370.8	367.3 – 387.1
River or drain conductance (m/day)	N/A	1.0	1.0

Table B-3 Pumping well locations and rates

Well #	X (<i>m</i>)	Y (<i>m</i>)	I	J	K	Pumping Rate (<i>m</i> ³ / <i>day</i>)
1	296708	4691732	14	28	2	-654
2	296908	4691690	17	27	2	-654
3	296964	4691523	26	20	2	-818

The upper portion of the shallow sand and gravel aquifer is simulated with the coverage Layer 1. This layer is treated as an unconfined aquifer with bottom elevation at 364.23 m. It consists of two polygons or Zone I and II: the small low-permeable zone near well 3 is represented by Zone II and the rest of the layer 1 is Zone I. The main portion of the shallow aquifer is simulated as coverage Layer 2. This layer is treated as a confined aquifer of uniform

thickness, with bottom elevation 350.5 m. Elevation input, horizontal and vertical hydraulic conductivities, and the net recharge rate are given in Table B-4. These values are estimated based on available data. Hydraulic conductivity is assumed to be isotropic ($K_h = K_v$).

Table B-4 Input parameters the layers for groundwater flow modeling

	Layer 1		Layer 2
	Zone I	Zone II	
Aquifer Type	Unconfined	Unconfined	Confined
Top Elevation (<i>m</i>)	400	400	N/A
Bottom Elevation (<i>m</i>)	364.23	364.23	350.5
Horizontal Conductivity, K_h (<i>m/day</i>)	25	0.05	75
Vertical Conductivity, K_v (<i>m/day</i>)	25	0.05	75
Net Recharge Rate, (<i>m/day</i>)	0.00021	0.00021	N/A

B.4.3 Model Calibration

The flow model is calibrated against the long-term average of the observed hydraulic heads at seven monitoring wells by changing the hydraulic conductivity, the net recharge rate, and the conductance of the two creeks. The calibration target is set to be within 0.5 m of the observed water levels and the results are listed in Table B-5. The calibrated conductance values are listed in Table B-2, the calibrated hydraulic conductivity values are listed in Table B-4, and the calibrated net recharge rate is 0.00021 m/day (3 in/yr). The calibrated steady-state head contours are illustrated in Figure B-4 along with a scatter plot of the observed vs. modeled head at the four monitoring wells and the error summary.

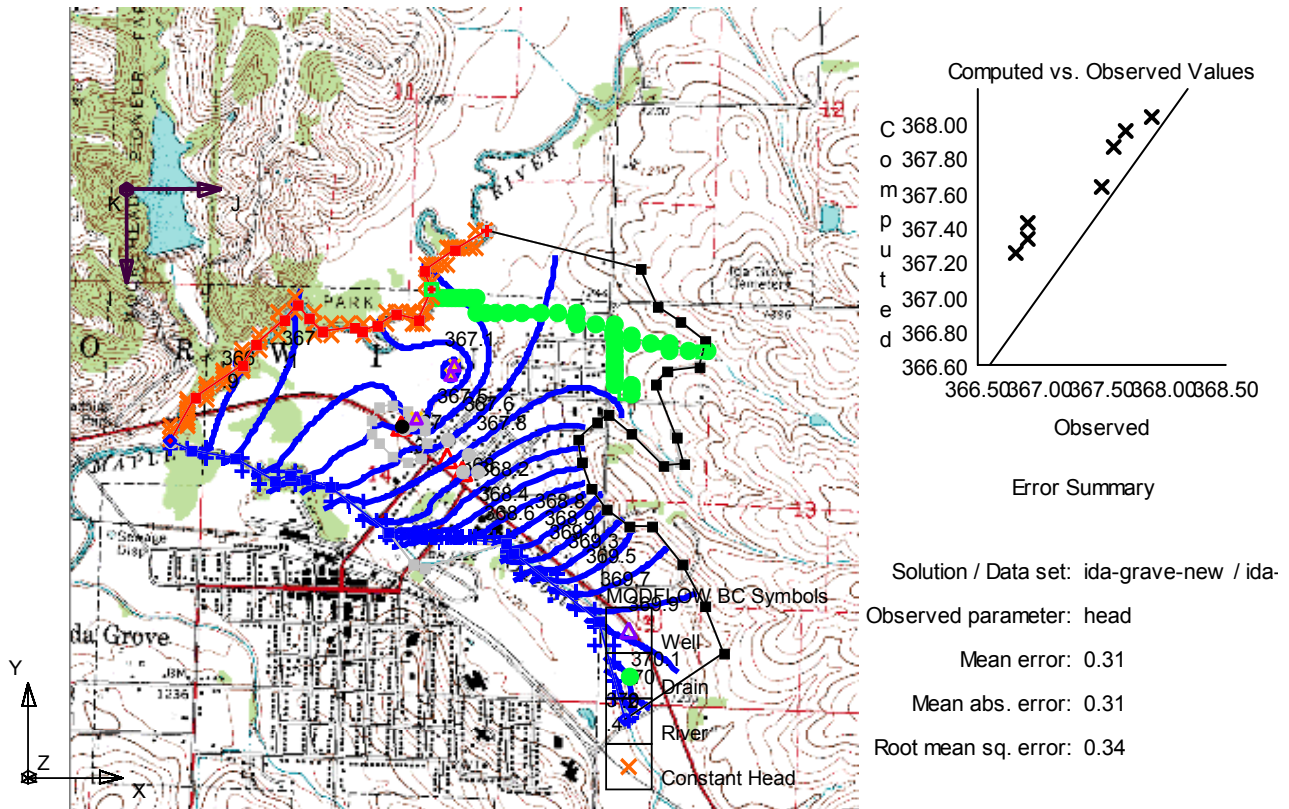


Figure B-4 Steady-state hydraulic head contours with calculation results.

Table B-5 Calibration results for hydraulic heads at observation wells

Well #	X (m)	Y (m)	I	J	K	Observed head (m)	Simulated head (m)	Error (m)
CMW-4	296742	4691492	28	19	1	366.90	367.32	0.42
CMW-16	296782	4691499	27	21	1	366.80	367.24	0.44
CMW-19	296708	4691479	28	17	1	366.90	367.42	0.52
RW-2	297004	4691304	33	32	1	367.90	368.03	0.13
RW-6	296947	4691307	33	30	1	367.70	367.95	0.25
RW-9	296966	4691372	32	31	1	367.60	367.85	0.25
RW-11	296881	4691429	30	26	1	367.50	367.62	0.12
Root Mean Square Error = 0.34								

B.4.4 Sensitivity Analysis

Two sensitivity simulations were carried out: one by doubling the values of hydraulic conductivity of Layer 1 and 2 and another by doubling the recharge rate in Table B-4. The simulation results are given in Table B-6. It is seen that the hydraulic heads are not sensitive to these changes. The RMSE increased slightly from 0.37 to 0.40 and 0.42, respectively. This is due to the fact that groundwater flow in this area is mainly controlled by the Maple River and Odebolt Creek.

Table B-6 Calibration results for hydraulic heads at observation wells with either K or the net recharge rate doubled

Well #	X (m)	Y (m)	I	J	K	Error with K doubled (m)	Error with recharge doubled (m)
CMW-4	296742	4691492	28	19	1	0.56	0.53
CMW-16	296782	4691499	27	21	1	0.60	0.50
CMW-19	296708	4691479	28	17	1	0.60	0.64
RW-2	297004	4691304	33	32	1	0.02	0.21
RW-6	296947	4691307	33	30	1	0.16	0.32
RW-9	296966	4691372	32	31	1	0.20	0.32
RW-11	296881	4691429	30	26	1	0.14	0.19
Root Mean Square Error =						0.40	0.42

B.5 Contaminant Transport Modeling

Five LUST sites are mapped along the highway, including one (8LTZ58) that is perched on a low permeability clay layer. An extensive monitor well network exists between the LUST sites and city water well #3 but monitor well control close around water wells #1 and #2 is lacking. Three contaminant sources corresponding to highest reported benzene concentrations at the LUST sites, 8LTZ58, 8LTA75, and 7LTB86 were simulated in the transport model. The modeled contaminant is benzene from the three LUST sites. The benzene plumes are simulated with MT3D in GMS v. 3.1 based on the steady-state groundwater flow condition obtained in Section B.4.

B.5.1 Model Conceptualization and Design

The simulation domain is the same shown in Figure B-1 with no solute flux across all the boundaries. The three LUST sites are treated as internal constant concentration sources and their location and concentrations are given in Table B-7. The times and amounts of petroleum released from the sources are uncertain. Source concentrations used are the maximum benzene concentrations in groundwater reported from monitor well samples at the individual sites.

Table B-7 Source locations and concentrations at the three LUSTs

LUST #	X (m)	Y (m)	I	J	K	Benzene Concentration (ppb)
8LTZ58	296704	4691487	28	17	1	30,000
8LTA75	296878	4691356	32	26	1	12,000
7LTB86	296945	4691307	33	30	1	25,000

B.5.2 Input Parameters

Four packages, Basic, Advection, Dispersion, and Chemical Reactions, are used in MT3D. Some of the parameters in the Basic package is listed in Table B-8. The method of characteristics (MOC) is selected in the Advection package.

Table B-8 Stress period and time step information in Basic package of MT3DMS

Stress period	Stress period length (<i>day</i>)	Max transport steps	Initial time step size	Time step bias	Max time step size
1	3650	20000	365	1	365

The other parameters needed in this simulation are effective porosity (n_e), dispersivity (α), and biodegradation rate (λ). Adsorption is neglected in the coarse grained aquifer. These parameters have not been determined from aquifer samples, so assumptions were made based on experience and on the borehole log descriptions, which show dominance of coarse, sandy material. The value for effective porosity is estimated to be 0.2. The value for longitudinal dispersivity (α_x) is estimated by noting the minimum plume length (between 8LTA75 and well #3) is about 600 ft, so the estimation formula of Neuman (1990) yields a value of 65 ft (20 m). However, the value of 15 m is used for α_x because part of large-scale heterogeneity (i.e., layering) that contributes to dispersion has been considered explicitly. Horizontal and vertical transverse dispersivity (α_y) were taken as 0.75m, and molecular diffusion is ignored. The biodegradation rate in all layers and zones was set as 0.001 day^{-1} . These parameter values are listed in Table B-9.

Table B-9 Input parameters for contaminant transport modeling

	Layer 1		Layer 2
	Zone I	Zone II	
Effective Porosity, n_e	0.2	0.2	0.2
Longitudinal Dispersivity, $\alpha_L (m)$	15	15	15
Transverse Dispersivity, $\alpha_T (m)$	0.75	0.75	0.75
Biodegradation Rate, $\lambda (day^{-1})$	0.001	0.001	0.001




B.5.3 Model Calibration

A calibration effort in this case would involve systematically adjusting the values of effective porosity, dispersivities (α_L , α_T), biodegradation rate (λ), in successive simulations, and comparing the results against the observed concentration at the monitoring wells. The transport model has not been fully calibrated. As the model now stands, the gross plume shapes from the simulations can be compared with mapped contamination from the field data. Actual site monitoring data show that benzene has never been detected in the monitor wells along Iowa Street, one block north of the LUST sites. Nor has it been detected in monitor wells between LUST site 8LTZ58 and city well #3 which facts provide constraints on plume spreading. With a calibrated model, evolution of the benzene plume could be simulated with greater confidence, and predictions about plume behavior could be made.

Figure B-5a illustrates the benzene plume in both layers after 10 years using the parameters listed in Table B-9. Figure B-5b is a close view of the plume. A large plume is formed due to the two sources at the two LUST sites of 8LTA75 and 7LTB86 and a small plume due to the LUST site of 8LTZ58. The plume boundary is set at the concentration of 100 ppb due to the accuracy of the numerical scheme used in the MT3DMS. The maximum length and width

of the large plume are listed in Table B-10. The plume is moving towards well #3 due to its direct down gradient position from the LUST sites. Pumping of well #3 draws the plume down to the well screen in Layer 2. Wells #1 and #2 are not polluted even they are also pumped at rates comparable to well #3. The benzene plume at Ida Grove is much larger than that at Climbing Hill because the two layers at Ida Grove are much more permeable than those at Climbing Hill. The simulation results show that at Ida Grove, the plume became stable in just two years, as the length and width of the plume stay almost the same after two years in both layers.

Benzen : 365.000

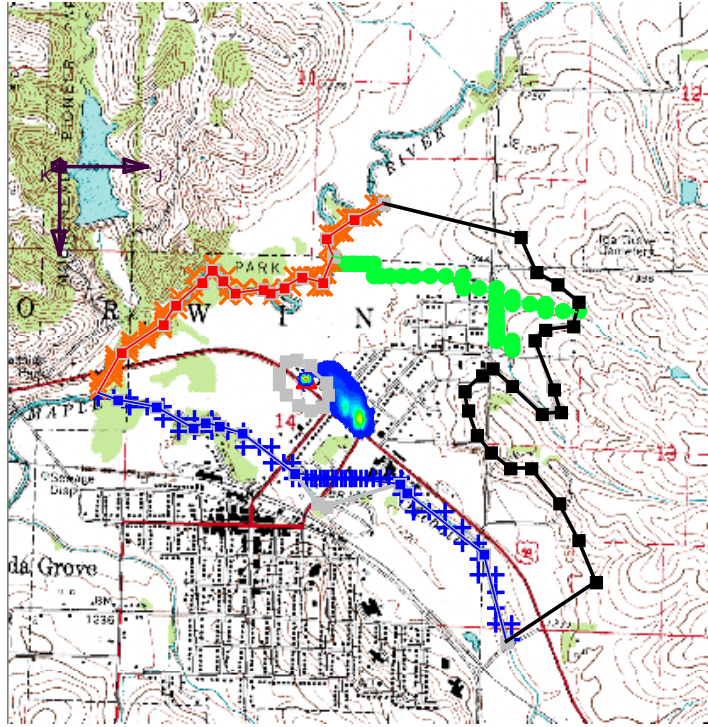

Benzen : 365.000

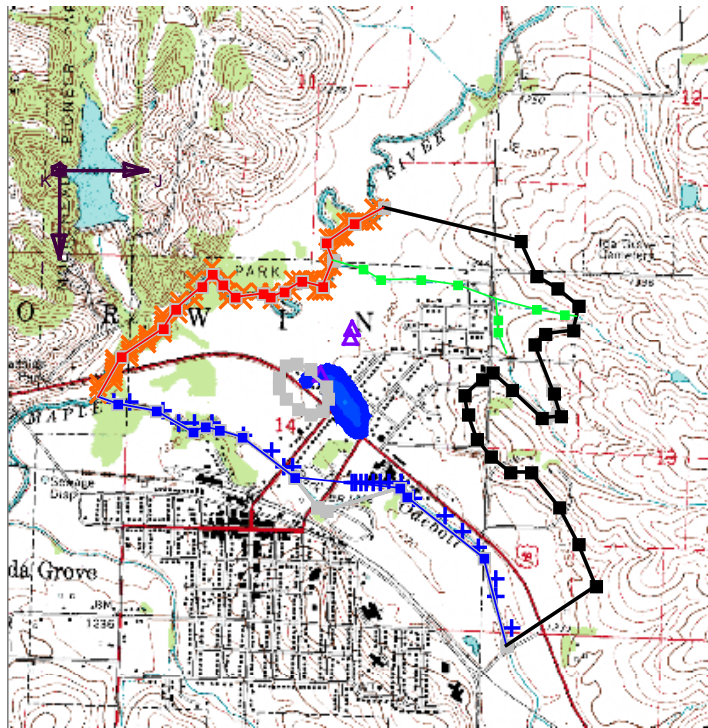




Figure B-5a Benzene concentrations at 3650 days in layer 1 (top) and in layer 2 (bottom)

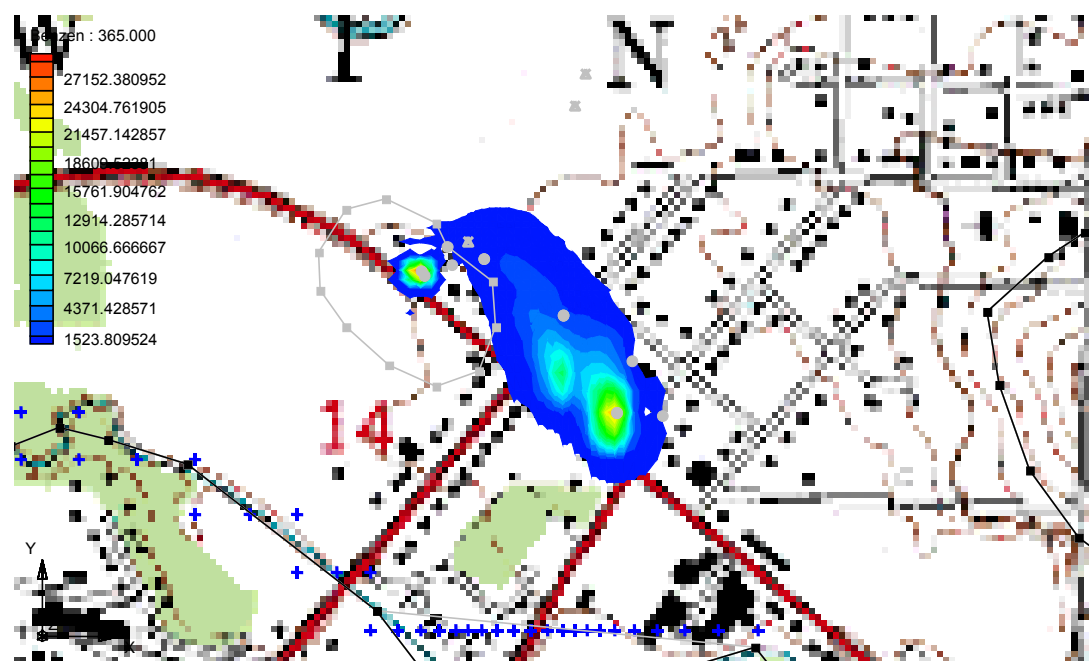


Figure B-5b Close view of benzene concentrations at 3650 days in layer 1 (top) and in layer 2 (bottom)

Table B-10 The length and width of the benzene plume at different times

Time (year)	Layer 1		Layer 2	
	Length	Width	Length	Width
1	394	167	366	154
2	401	176	404	155
3	406	176	406	156
5	406	179	404	155
10	406	179	406	155

B.5.4 Predictive Simulation

The scenario that city well #3 is shut off while both well #1 and #2 remain pumping, was simulated. Simulating this condition gives an idea of the hydraulic effect well #3 has on the plume, and an idea of the risk to wells #1 and #2. Figure B-6 illustrates the benzene plume in both layers after 10 years using the same parameter values used for Figure B-5. It is seen that without being captured by the well #3, the benzene plume migrated much further down gradient and dispersed wider towards wells #1 and #2. Both of the two wells would probably become contaminated by benzene if this case was put into practice.

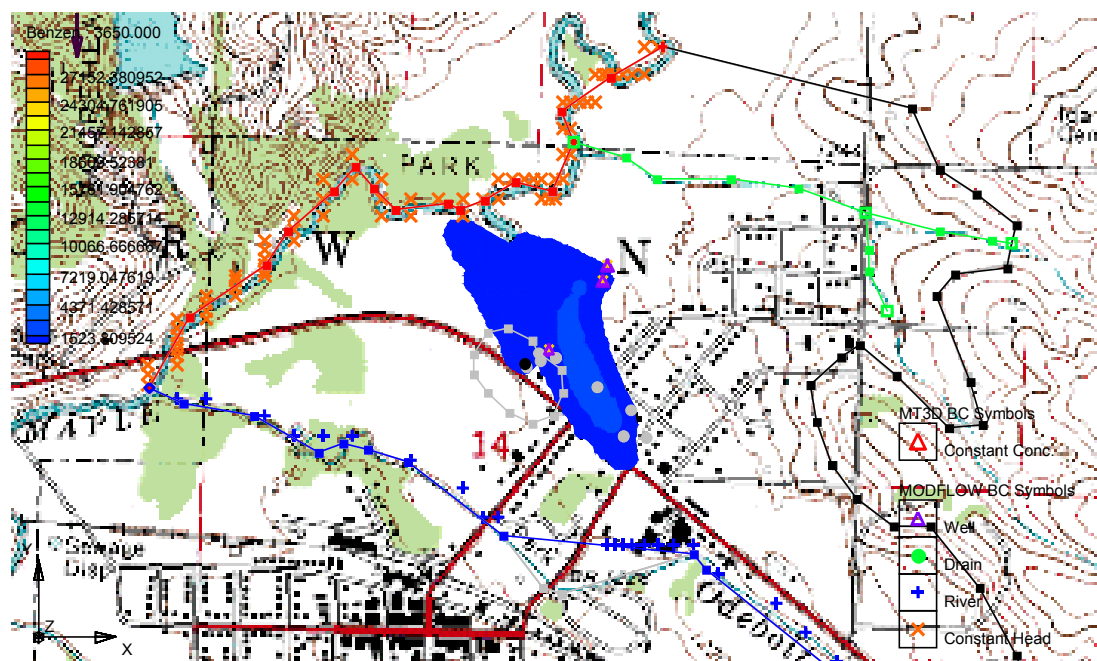
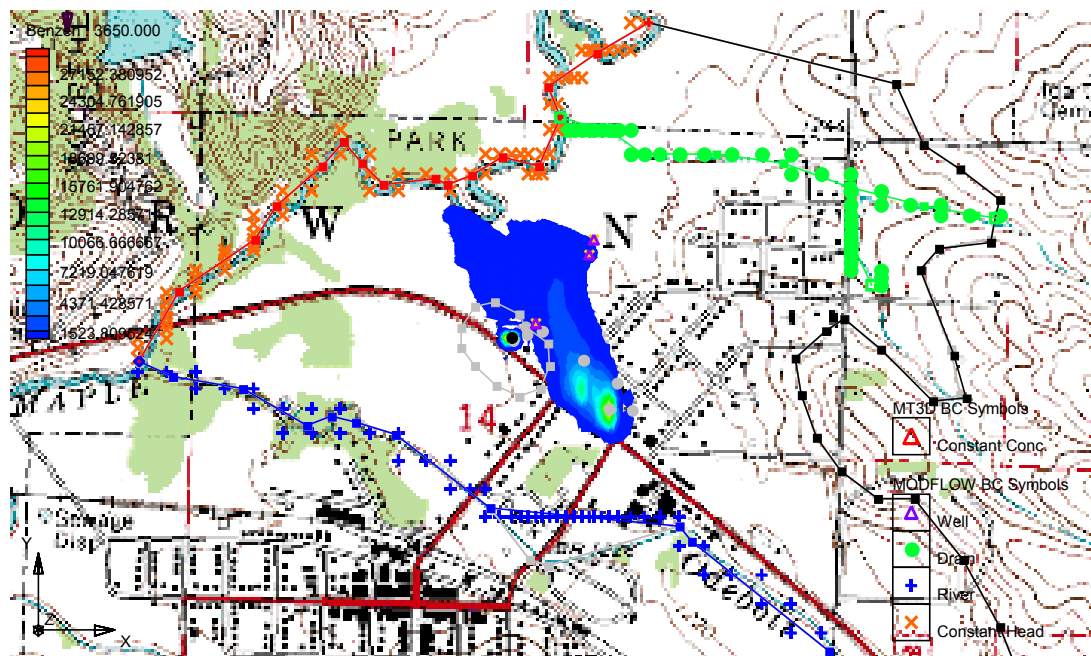


Figure B-6 Benzene concentrations at 3650 days in layer 1 (top) and in layer 2 (bottom) when Well #3 is not pumping

B.6 Summary and Conclusions

Groundwater flow in the neighborhood of the petroleum plumes and the city water wells is generally toward the NW, and appears to be controlled mainly by hydraulic connection between the aquifer and Odebolt Creek on the south, and hydraulic connection between the aquifer and the Maple River on the west. The regional groundwater flow for the area is northwestward, through the LUST sites and toward city well #3. With no wells pumping, city wells #1 and #2 are located off the groundwater flowpath that passes through the LUST sites. With the caveat that the transport model has not been calibrated, the model appears to demonstrate that if city well #3 is shut off, while wells #1 and #2 remain pumping, the latter wells would be expected to capture the contaminant plume from the LUST sites although concentrations reaching the well screens would likely be low. The groundwater flow direction from LUST site 8LTZ58 is dominantly vertical. Any leakage of petroleum downward through the clay layer at LUST site 8LTZ58 will contaminate the aquifer at a point within the radius of influence of city well #3.

C. Cook Park, Sioux City

C.1 Statement of Problem

Sioux City is located in northwestern Woodbury County of Iowa. The Cook Park neighborhood of Sioux City is located in the drainage of Perry Creek, about $\frac{3}{4}$ of a mile north of the Missouri River, and $1\frac{1}{2}$ miles west of the Floyd River (Figure C-1). Two wells that are important components of the Sioux City water supply are located in Cook Park. Both of these wells produce from the Cretaceous Dakota Fm. and are cased through the overlying Quaternary alluvial gravel. A third well of similar construction is planned for the vicinity. Petroleum contamination as MTBE was detected in one of these wells in 2000, and has persisted in

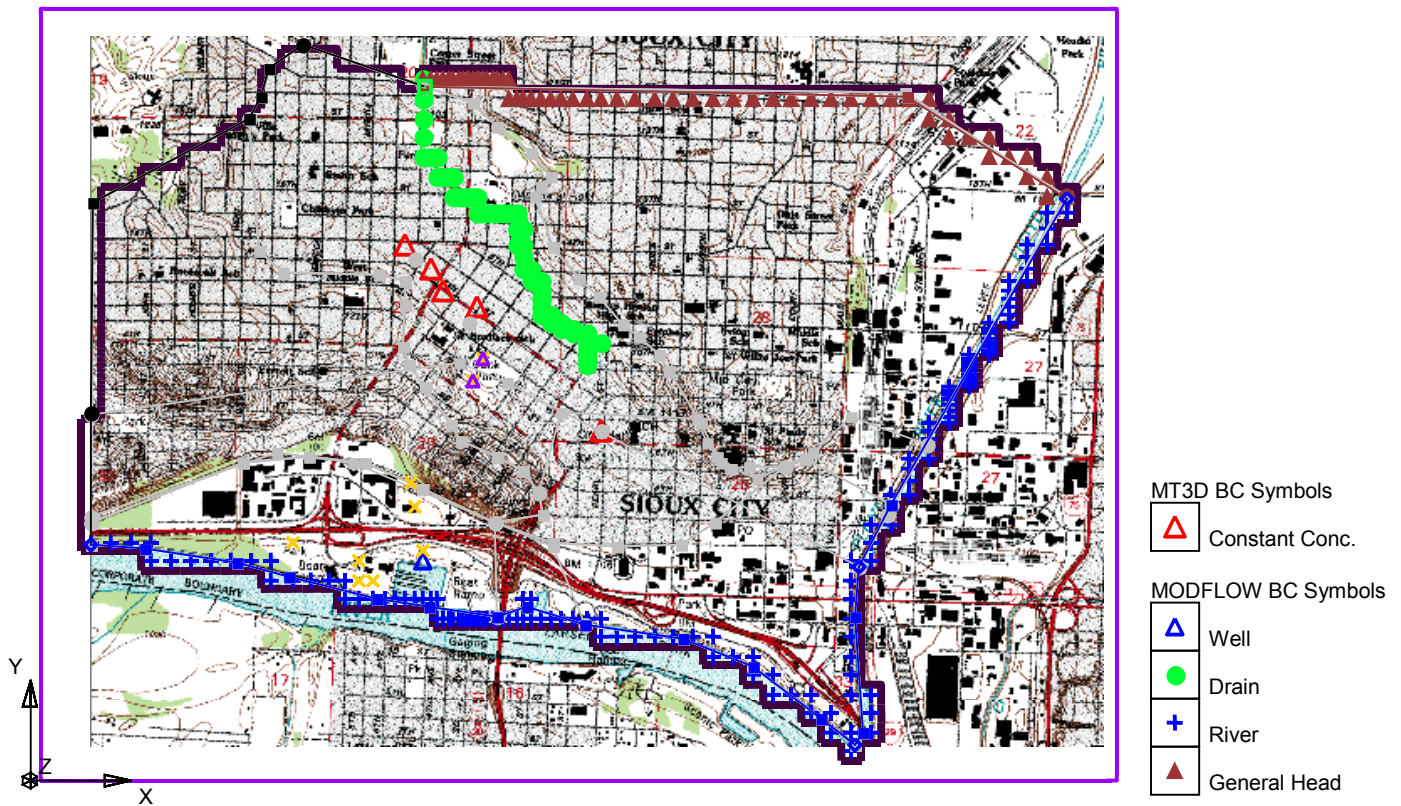


Figure C-1 The simulation domain with wells and sources for Cook Park

has 11 operating wells that variously produce from Holocene alluvium and/or underlying Dakota Fm. The Quaternary Age units near the Missouri River are interpreted to be hydrologically subsequent water samples. Another well field for Sioux City is developed on the Missouri River flood plain about ½ mile south of Cook Park. This well field is known as the Riverfront field and separated from the units in Cook Park by an intervening remnant of low-permeability till. Farther to the east, near downtown Sioux City, the Quaternary Loess and alluvial units are interpreted to be hydrologically connected to the Missouri River alluvium.

An important question that is yet unanswered for security of the Sioux City water supply is whether or not the Dakota aquifer is confined at Cook Park. A second question of equal importance is whether the well casing through the gravel aquifer is intact or compromised. Petroleum contamination is known to occur at several LUST sites to the north, northwest and east of Cook Park.

C.2 Objectives

The purpose of modeling groundwater and contaminant transport at Cook Park was to determine:

- 1) the groundwater flow system that exists between the existing two-well field and the surrounding LUST sites;
- 2) what forms the MTBE and benzene plumes can be expected to have; and
- 3) what the effect on contaminant flow will be with addition of a third well in the vicinity.

C.3 Hydrogeologic Characterization

Maps, borehole logs, water level data, other hydrogeological information, and groundwater contaminant concentrations for Sioux City are taken from the IDNR LUST files #7LTT65, 8LTA40, 9LTA51, 7LTN10, 8LTX04, 8LTG66, 7LTQ55, 7LTI27, 8LTQ24, 8LTK38, 9LTI01, 8LTK62, 8LTJ27, 8LTW66, and 9LTC16. Additional hydrogeological and stratigraphic information was found in Munter *et al.*, 1983, and Burkart, 1984. Other borehole logs in the vicinity were obtained from IDOT (1979a, b; Iowa St. Hwy. Comm., 1957). Stratigraphic information in the Riverfront well field was also found in HDR Engineering (1998). Water well logs and some water production information are available on the internet at the IGSB GeoSam site (www.igsb.uiowa.edu/geosam_map). Water well construction diagrams and drillers logs for the Cook Park wells and the Riverfront wells were obtained from IDNR Field Office 3 (Spencer). Additional insights into the complex hydrostratigraphy of this region came from conversations with Prof. E.A. Bettis of the Univ. of Iowa Geoscience Dept., Drs. Brian Witzke and Greg Ludvigson, and Messers. Bob Libra and Bill Bunker of IGSB, and Mr. Richard Hammond of Hammond Wetmore Drilling, Vermillion, SD, and Mr. Brian Norton of Olsson Environmental Sciences, Omaha, NE.

Sioux City is at the boundary between the Loess Hills and Missouri River Alluvial Plain landform regions. Loess hills underlain by Cretaceous age formations separate the Cook Park neighborhood from the Big Sioux River, more than 3 miles to the west. The area is in a stratigraphically complex region that records many periods of late Quaternary age glacial and alluvial deposition on surfaces sculpted by erosion. Bedrock stratigraphy beneath the Quaternary section includes the Dakota Fm., and, in places, the overlying Graneros Fm., and is also modified by an erosional surface. Stratigraphic control is moderately good in the region, but lateral changes within the Cretaceous and Quaternary units, and the many erosional surfaces

within the section make correlations difficult. In the Cook Park vicinity the Quaternary-Cretaceous contact is mapped as about 165 ft below ground surface and the uppermost Cretaceous unit is the Dakota Fm. (Witzke and Ludvigson, written and verbal communication, March, 2001).

One or more Pre-Illinoian tills are present above the Dakota Fm. in the Sioux City area. The glacial deposits are cut out in many places, but are generally overlain by alluvial sands and gravels of the Noah Creek Fm. Peoria Fm. loess generally overlies the Pleistocene age alluvial deposits and is about 40 ft thick at Cook Park. Holocene age erosion and sedimentation have greatly modified the loess deposit, cutting it out of the section in some places, and burying it with alluvial sands and clays in other places. At Cook Park, the Quaternary section has loess and alluvium beneath thin topsoil and irregular deposits of fill. This is underlain by Noah Creek sand that grades downward to gravel. Pre-Illinoian till underlies the gravel, and sandstone and shale of the Dakota Fm. occur immediately below that.

In general, groundwater in both the shallow alluvial aquifer and deep Dakota sandstone flows towards the Missouri River. Annual recharge to the water table is not precisely known, but is likely in the range of 2 to 6 inches (0.051 – 0.152 m/y) or 7 – 25 % of annual precipitation. The depth to the water table in the Cook Park vicinity is about 40 ft, near the contact between the loess and underlying sands and gravels.

C.4 Groundwater Flow Modeling

C.4.1 Conceptualization and Design

The simulation domain is shown in Figure C-1. The south and east boundaries are formed by the Missouri River and Floyd River, respectively, both of them are simulated with the River

package in MODFLOW (the blue pluses in Figure C-1). The Missouri River flows from west to east and its stage at the entering and exit point of the domain are 323.0 m and 322.3 m, respectively. The boundary to the north is modeled with the general head boundary package in MODFLOW (the brown triangles in Figure C-1) since neither a physical or hydraulic boundary exists in this area. The boundary to the west is treated as no-flow boundary because it is a topographic divide for the shallow, alluvial aquifers, and is parallel to the direction of groundwater flow, i.e., it is a flowline, for the deeper Dakota aquifer.

A three-dimensional, four-layer, steady-state model of the Cook Park vicinity was constructed to examine hydraulic behavior and contaminant transport in the upper aquifer of the Dakota Fm., an overlying confining layer, if present, and the overlying alluvial sand and gravel. Figure C-2 is a simplified north-south hydrogeological cross section through Cook Park, showing the model layers and well positions.

The simulation domain is divided into an irregular grid which is refined at the two wells (Table C-1). The active cells consist of 46 rows, 45 columns, and 4 layers and are shown in Figure C-3.

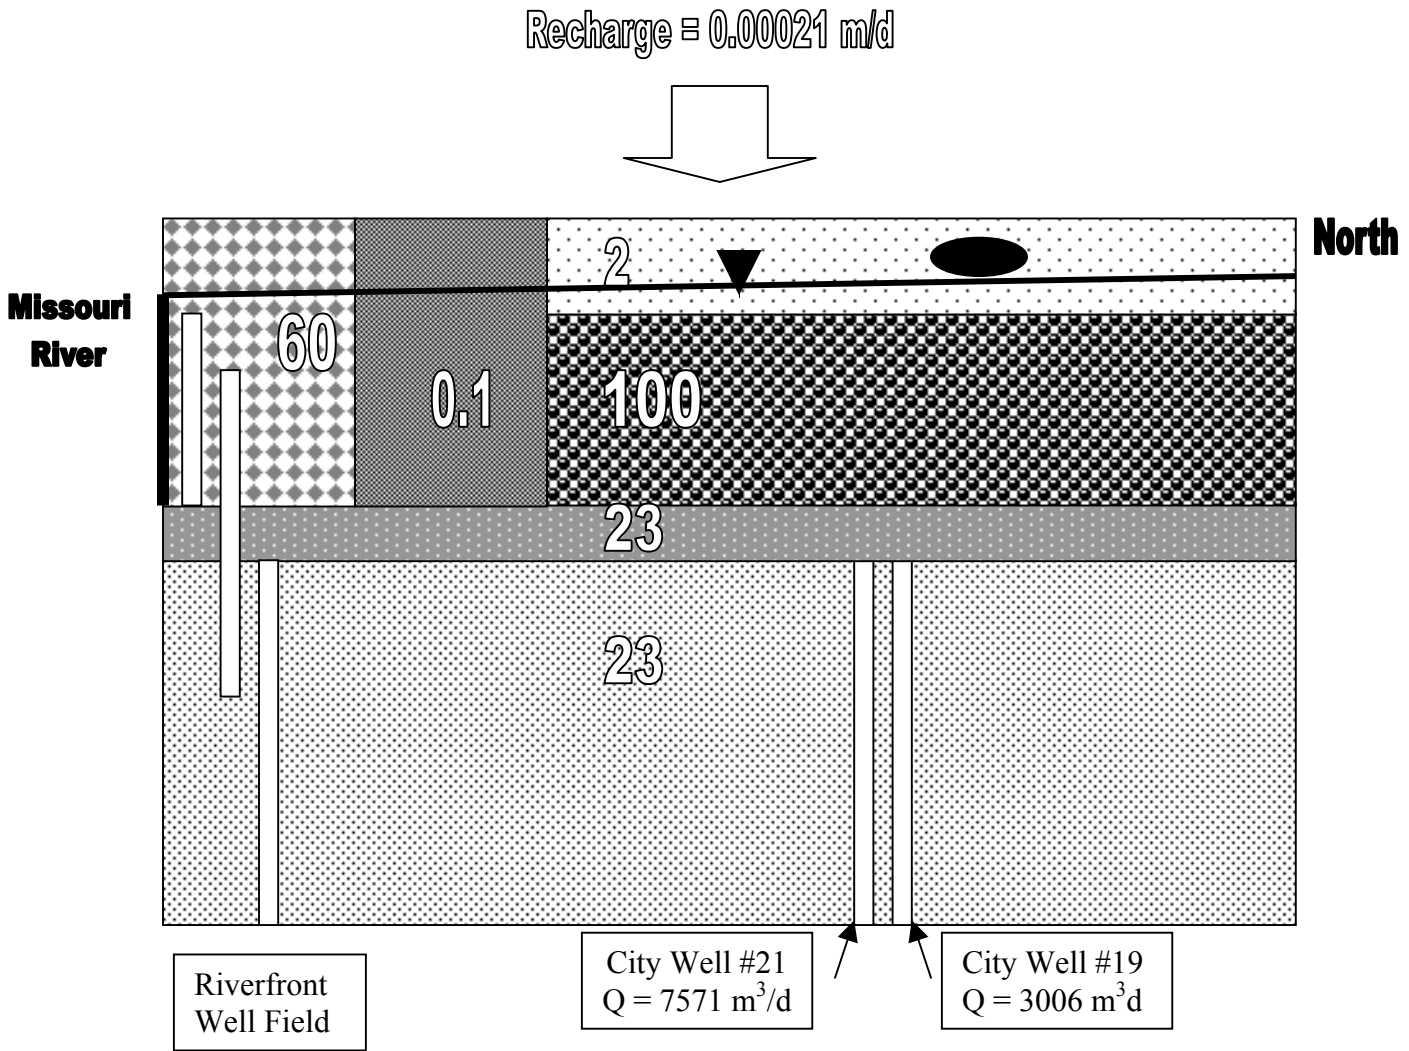


Figure C-2 Schematic N-S cross section of the Cook Park conceptual model. Not to scale. Black triangle denotes water table; black oval denotes petroleum source. Numbers within various fields are hydraulic conductivity (m/d) for the unit indicated.

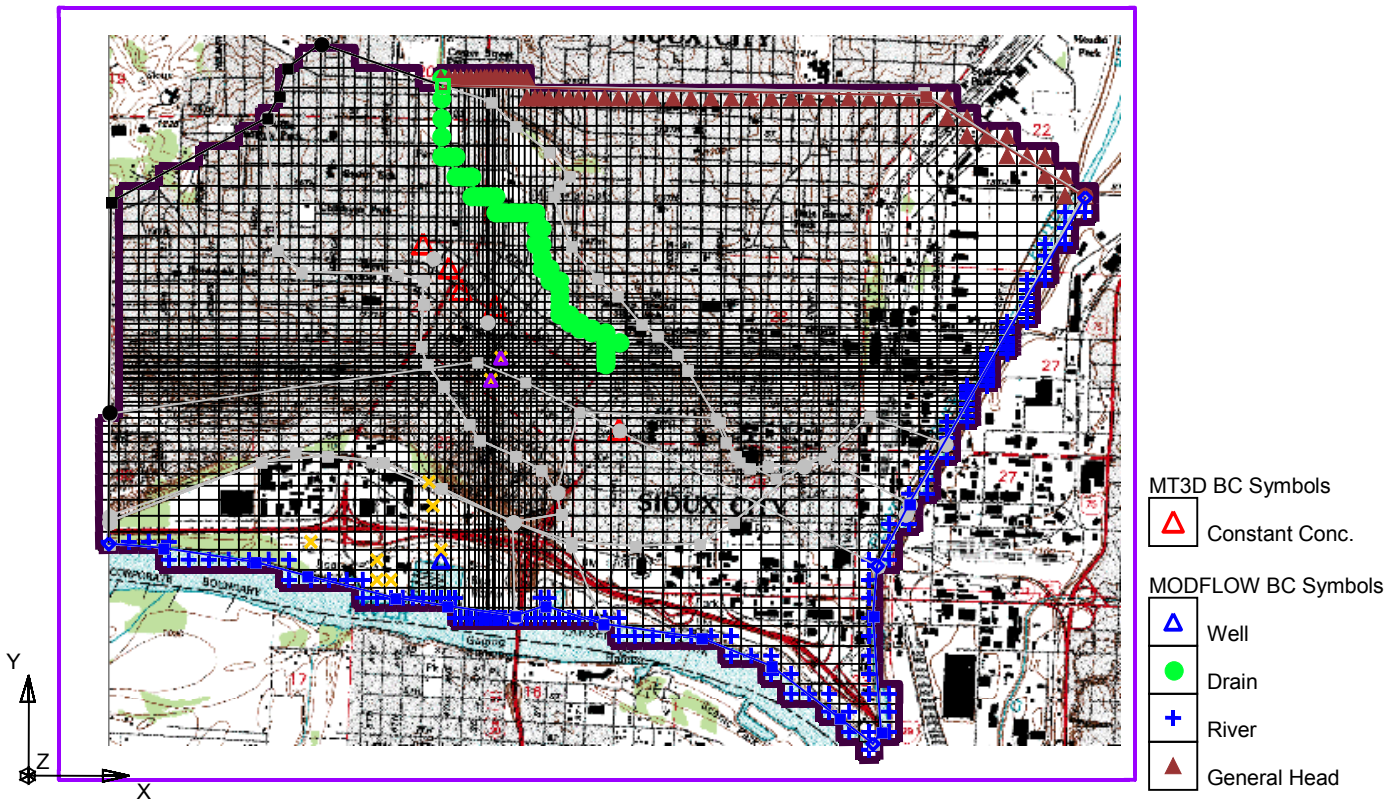


Figure C-3 Finite difference grids of the modeling domain

Table C-1. Parameters for grid refinement at the two wells.

Well #	Refine grid in X direction			Refine grid in Y direction		
	Base cell size	Bias	Max cell size	Base cell size	Base	Max cell size
19	15	1.1	100	15	1.1	100
21	N/A	N/A	N/A	15	1.1	100

C.4.2 Input Parameters

Six coverages for the model domain, Source/Sink, Layer 1, Layer 2, Layer 3, Layer 4, and Recharge, are created in GMS. The packages used in MODFLOW are: Basic, BCF, Well, Drain, General Head, Recharge, PCG2, and Output Control. The input parameter values for the

Source/Sink coverage are listed in Table C-2 and C-3. The Missouri River and Floyd River are simulated with the river package while Perry Creek is modeled with the drain package, even though water table evidence indicates Perry Creek is not an important hydrological feature with respect to the groundwater. Values of the river stage, bottom elevation, and conductance are given in Table C-2. Table C-3 provides the locations and pumping rates for the ten wells set in the model. Wells #7, #8, and #9 are screened in multiple layers, so their total pumping rate were distributed equally to the layers. This is an approximation of hydraulic behavior for the wells, and is a detail that can be further refined if necessary. Wells #1, #3, #4, #6 in the Riverfront field pump at negligible rates and were not included in the simulations. The large capacity collector well also in the Riverfront field is under direct influence of the Missouri River, and is not expected to affect the hydrologic regime in Cook Park appreciably. The proposed Dakota well in Cook Park is located about 400 ft east of well #21, and is expected, once approval is obtained from IDNR, to pump at a rate similar to well #21.

Table C-2. Input parameters for the rivers, creek, and general head boundary.

	Missouri River	Floyd River	Perry Creek	General Head
Simulated in MODFLOW by	River	River	Drain	General head
River stage (<i>m</i>)	327.3-328.0	327.3-328.0	N/A	N/A
Bottom elevation (<i>m</i>)	322.3- 323.0	322.3-325.0	335.3-336.8	326.8-328.0
Conductance (m/day)	30	30	5.0	0.5

Table C-3 Pumping well locations and rates

Well #	X (m)	Y (m)	I	J	K	Pumping Rate (m ³ /day)
19	296708	4691732	29	36	4	-3006
21	296908	4691690	36	33	4	-7571
5	219010	4710114	51	21	4	-28.6
11	219026	4710000	53	22	4	-6242
10	218426	4709818	55	13	4	-922
2	218753	4709731	56	17	4	-1549
9	219068	4709774	56	23	1	-3.6
9	219068	4709774	56	23	2	-3.6
8	218755	4709636	57	17	2	-774
8	218755	4709636	57	17	3	-774
8	218755	4709636	57	17	4	-774
7	218823	4709629	57	18	2	-970
7	218823	4709629	57	18	3	-970
7	218823	4709629	57	18	4	-970

The hydrostratigraphy was simplified as a stack of layers of uniform thicknesses. This may be an oversimplification of the stratigraphy as discussed above, but the objectives of this modeling pertain to the vicinity of Cook Park, so the well control there was deemed to be most important for the model. Attempting to represent accurately the stratigraphy in more distant parts of the domain would add needless complexity to the model. Layer 1 represents a thin, unconfined zone that contains the contaminant sources. It is heterogeneous on a large scale and thus is divided into four zones (Figure C-4). This unit is typically a fine to medium grained

alluvial sand, and might in some places include silts of the overlying loess. The main thickness of the loess and Holocene alluvial deposits around Cook Park are in the unsaturated zone and so cannot be modeled with MODFLOW and MT3D. Deposits of till are known to occur between Cook Park and the Riverfront field to the south, so a low permeability zone was set in layer one, separating the two areas. Stratigraphy to the east of Cook Park is not well known, and the influence of the Floyd River on the unconfined aquifer is likewise not well known.

Consequently, the simulated results on that side of the model are assumed to be of doubtful accuracy. Because the Quaternary sand and gravel unit represented by layer 2 is the same formation (Noah Creek) as that for which pump tests are available from Ida Grove, a comparable hydraulic conductivity of 100 m/d was assumed. Layer 3 was divided into two zones (Figure C-4) where Zone II, with a small K value of 0.23 m/d, is included to simulate the effect of a confining layer above the Dakota aquifer. Layer 4 represents the upper productive part of the Dakota aquifer, across which the city wells are screened. A hydraulic conductivity of 23 m/d was assigned to this layer. That K value is the average of reported K's for the Dakota regionally (Munter *et al*, 1993). The aquifer type, top and bottom elevation, and horizontal and vertical hydraulic conductivity for each layers and zones are listed in Table C-4. These values are estimated based on available data.

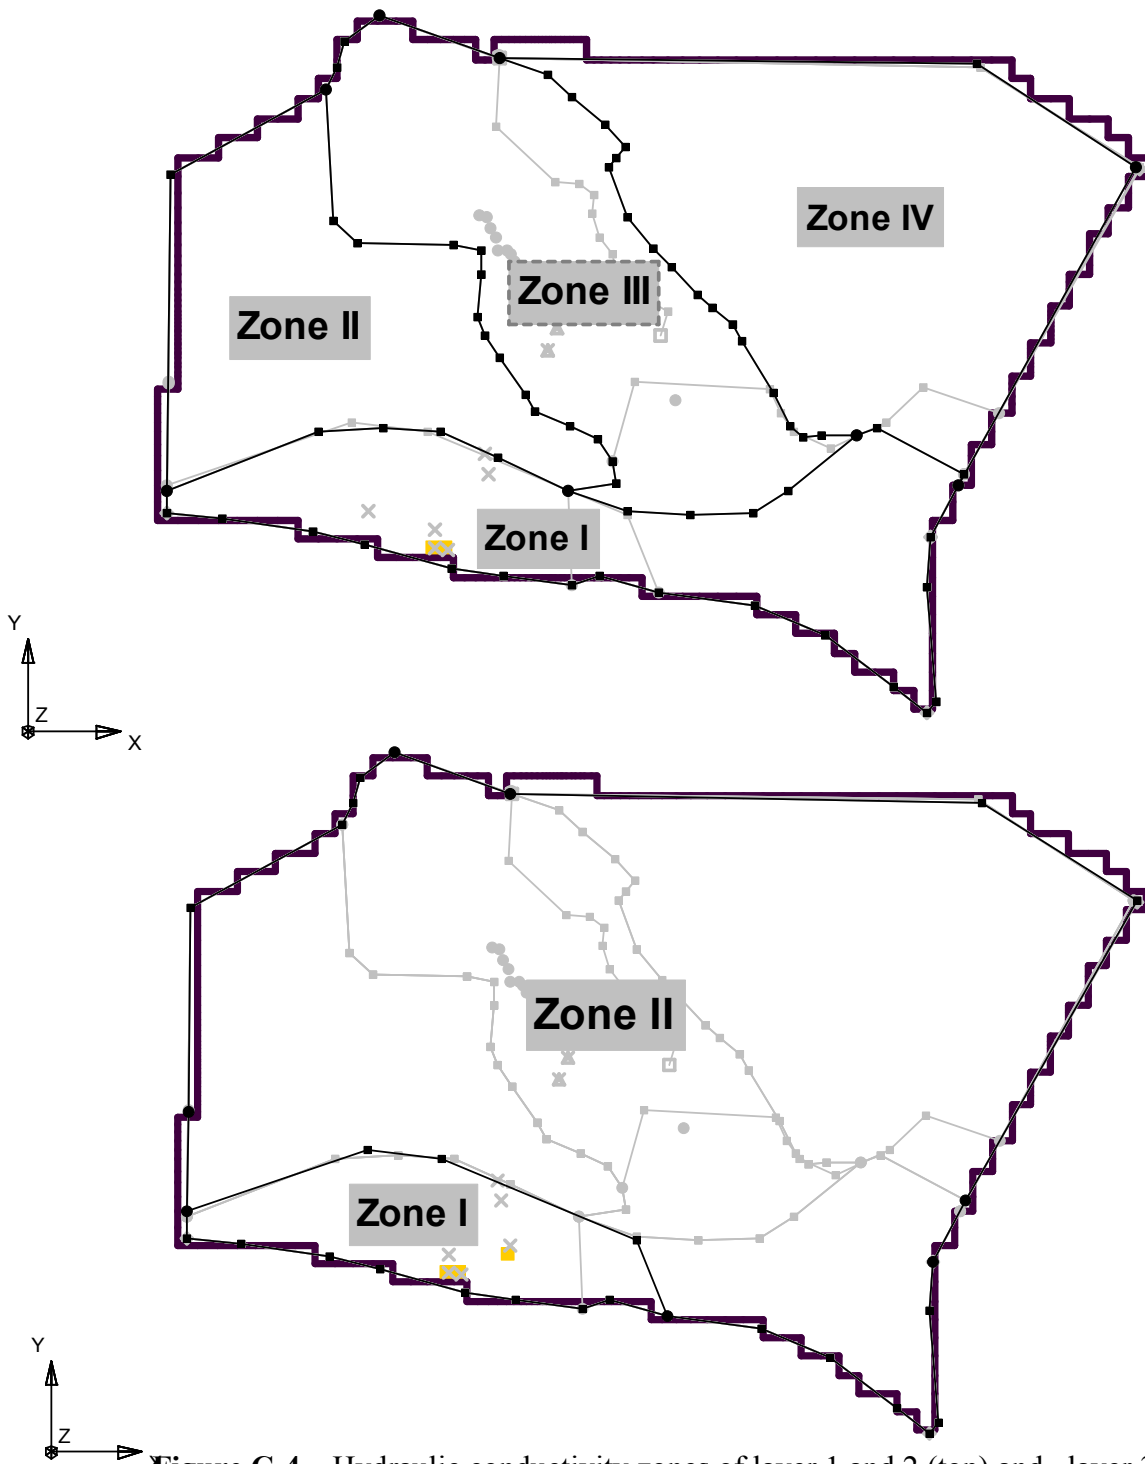


Figure C-4. Hydraulic conductivity zones of layer 1 and 2 (top) and layer 3 (bottom) (ignore the light green or gray lines)

Table C-4 Input parameters of the layers and zones for groundwater flow modeling

Well #	Zone #	Aquifer Type	Top Elevation (m)	Bottom Elevation (m)	K_h (m/d)	K_v (m/d)	Recharge Rate (m)
Layer 1	I	Unconfined	342	320	60	60	0.00042
	II	Unconfined	342	320	0.1	0.1	0.0001
	III	Unconfined	342	320	2.0	2.0	0.00042
	IV	Unconfined	342	320	1.5	1.5	0.00042
Layer 2	I	Confined	320	289	0.1	0.1	N/A
	II	Confined	320	289	100	100	N/A
	III	Confined	320	289	1.5	1.5	N/A
	IV	Confined	320	289	60	60	N/A
Layer 3	I	Confined	289	284	23	23	N/A
	II	Confined	289	284	0.23	0.23	N/A
Layer 4	N/A	Confined	284	110	23	23	N/A

C.4.3 Model Calibration

The flow model is calibrated by changing the hydraulic conductivity, the net recharge rate, and the conductance of the two river beds, and comparing results with the long-term average of the observed hydraulic heads at eleven monitor wells. The available monitor wells only go a few feet deeper than the water table, so calibration could not be done for the deeper layers. The calibration target is set to be within 0.5 m of the observed water levels and the results are listed in Table C-5. Information was not obtained regarding the pumping water levels in wells 19 and 21. Once this information becomes available, additional calibration of layer 4

will be possible. The calibrated conductance values are listed in Table C-2, the calibrated hydraulic conductivity values are listed in Table C-4, and the calibrated net recharge rate is 0.00021 m/day (3 in/yr). The calibrated steady-state head contours are illustrated in Figure C-5 along with a scatter plot of the observed vs. modeled head at the four monitoring wells and the error summary. The calibration is excellent: all errors are smaller than 0.5 m and the RMSE is only 0.24.

Table C-5 Calibration results for hydraulic heads at observation wells

Well #	X (m)	Y (m)	I	J	K	Observed head (m)	Simulated head (m)	Error (m)
MW-6	218980	4711321	13	21	1	326.90	326.77	-0.13
MW-8	219017	4711294	13	22	1	327.10	326.76	-0.34
MW-14	219033	4711234	14	22	1	326.80	326.75	-0.05
MW-25	219061	4711185	15	23	1	327.00	326.78	-0.22
RMW-8	219120	4711127	16	24	1	326.70	326.69	-0.01
RMW-12	219140	4711107	16	25	1	326.70	326.68	-0.02
RMW-15	219158	4711065	17	25	1	326.50	326.66	0.16
RMW-16	219203	4711025	18	27	1	326.70	326.64	-0.06
RMW-18	219071	4711125	16	23	1	326.70	326.70	-0.00
RMW-36	219307	4710916	21	32	1	326.20	326.60	0.40
SMC	219959	4710374	46	50	1	326.40	326.91	0.51
Root Mean Square Error = 0.24								

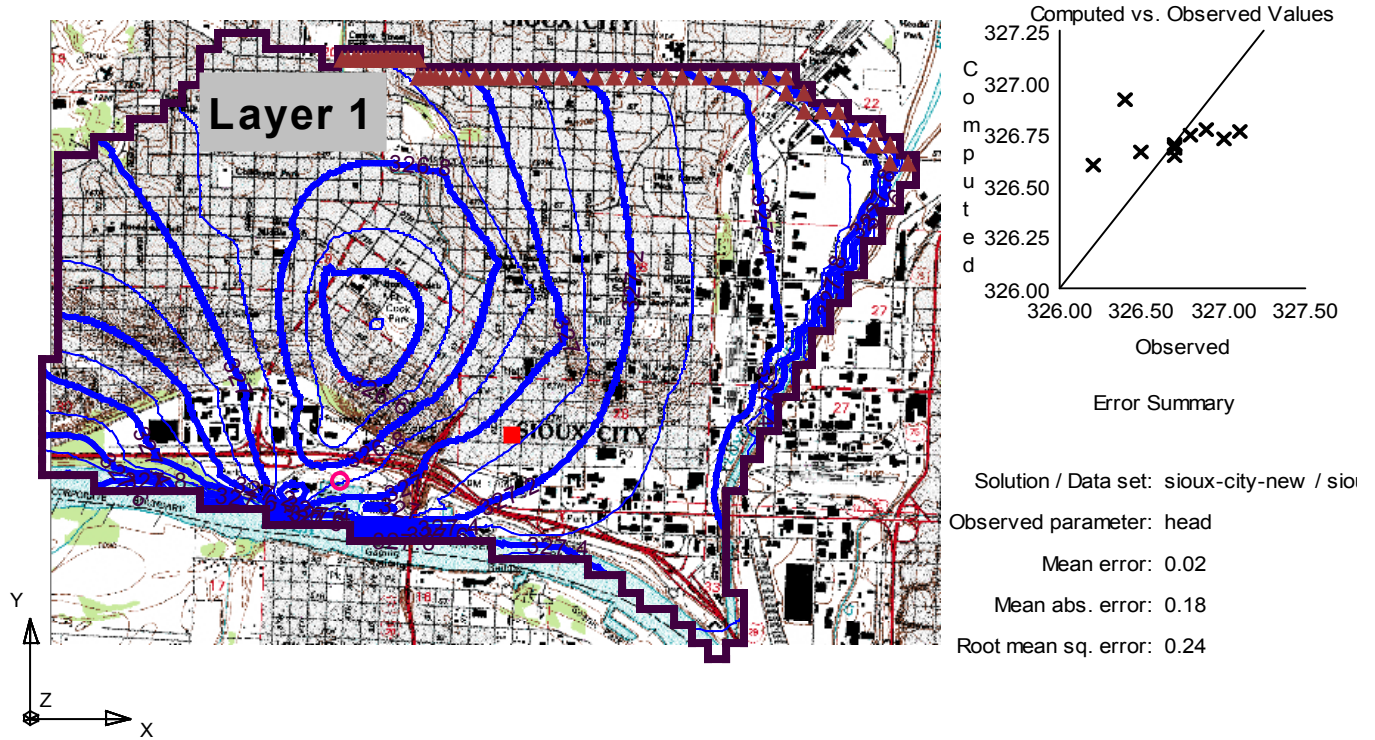


Figure C-5 Steady-state hydraulic head contours of Layer 1 at Cook Park (left) with scatter plot of simulated vs. observed heads at monitoring wells (right)

C.4.4 Sensitivity Analysis

A sensitivity simulation is carried out by changing the value of hydraulic conductivity of layer 3 from 0.23 to 23 m/d, i.e., assuming there is no confining layer between the alluvium and the Dakota formation. Comparison between the simulated and observed heads is given in Table C-6. It is seen that the hydraulic heads are not sensitive to this change. Most wells have more or less the same head values and the RMSE has the same value of 0.24 in Table C-5.

Table C-6 Comparison of the simulated and observed heads when $K=23$ m/d for layer 3

Well #	X (m)	Y (m)	I	J	K	Observed head (m)	Simulated head (m)	Error (m)
MW-6	218980	4711321	13	21	1	326.90	326.79	-0.11
MW-8	219017	4711294	13	22	1	327.10	326.78	-0.32
MW-14	219033	4711234	14	22	1	326.80	326.77	-0.03
MW-25	219061	4711185	15	23	1	327.00	326.74	-0.26
RMW-8	219120	4711127	16	24	1	326.70	326.71	0.01
RMW-12	219140	4711107	16	25	1	326.70	326.70	-0.00
RMW-15	219158	4711065	17	25	1	326.50	326.67	0.17
RMW-16	219203	4711025	18	27	1	326.70	326.65	-0.05
RMW-18	219071	4711125	16	23	1	326.70	326.72	0.02
RMW-36	219307	4710916	21	32	1	326.20	326.57	0.37
SMC	219959	4710374	46	50	1	326.40	326.93	0.53
Root Mean Square Error = 0.24								

C.5 Contaminant Transport Modeling

Contaminant sources exist in layer one of the model and include five known LUST sites within a few blocks around the Cook Park well field. A monitor well network exists for some of these LUST sites, but no recent data is available for others, and no shallow monitor wells currently exist in Cook Park. The contaminants of concern are benzene and MTBE from the three LUST sites. The plumes are simulated with MT3D in GMS v. 3.1 based on the steady-state groundwater flow condition obtained in Section C.4.

C.5.1 Model Conceptualization and Design

The simulation domain is the same shown in Figure C-1 with no solute flux across all the boundaries. Four contaminant sources were set in the model corresponding to highest reported benzene concentrations. These sources are at the LUST sites, 8LTA40, 7LTT65, and 7LTQ55, and are in a line along West 7th Ave, to the north and northwest of Cook Park. A fifth source, corresponding to the highest MTBE concentration in the vicinity, was set at the former location of LUST site 8LTK62, east of Cook Park. A weak MTBE source was also set at 7LTT65. The source concentrations are given in Table C-7. The LUST sites are treated as internal constant concentration sources, which represents a conservative scenario even though the times and amounts of petroleum releases from the sources are uncertain. Benzene and MTBE source concentrations are the highest reported concentrations from monitor wells at the individual sites. These were concentrations at the water table, some 30 ft below the LUSTs. Contaminated soil exists in the unsaturated zone between, but could not be modeled with this software.

Table C-7. Source locations and concentrations at the five LUSTs

LUST #	X (m)	Y (m)	I	J	K	Benzene Concentration (ppb)	MTBE Concentration (ppb)
8LTA40	218986	4711301	13	21	1	3,000	NA
7LTT65	219110	4711175	15	24	1	6,000	300
8LTE66	219173	4711072	17	26	1	4,000	NA
7LTQ55	219339	4710986	19	34	1	5,000	NA
8LTK62	219958	4710371	46	50	1	3,000	1700

C.5.2 Input Parameters

Four packages, Basic, Advection, Dispersion, and Chemical Reactions, are used in MT3D. Some of the parameters in the Basic package is listed in Table 8. The method of characteristics (MOC) is selected in the Advection package.

Table C-8. Stress period and time step information in Basic package of MT3DMS.

Stress period	Stress period length (<i>day</i>)	Max transport steps	Initial time step size	Time step bias	Max time step size
1	3650	20000	365	1	365

The other parameters needed in this simulation are effective porosity (n_e), dispersivity (α), and biodegradation rate (λ). Adsorption is neglected in the coarse alluvial sand and gravel and in the Dakota Fm. sandstone. These parameters have not been determined from aquifer samples, so assumptions were based on the borehole log descriptions. The value for effective porosity is estimated to be 0.2. The value for longitudinal dispersivity (α_x) is estimated by noting the plume length from site 8LTA40 is about 550 ft, so the estimation formula of Neuman (1990) yields a value of 65 ft (20 m). However, the value of 15 m is used for α_x because part of large-scale heterogeneity (i.e., layering) that contributes to dispersion has been considered explicitly. Horizontal and vertical transverse dispersivity (α_y) were taken as 0.75m, and molecular diffusion is ignored. The biodegradation rate was set at $\lambda = 0.001$ /d. Slower biodegradation rate was assumed for the lower oxygen environment of the Dakota aquifer. These parameter values are listed in Table C-9. Note that Zone I of Layer 1 (clay till) has the same parameters as the aquifers, even though it has a much finer-grained texture. This is not reasonable assumption, but for these simulations transport in the till is not a concern in that Zone, so there is no effect in the model.

Table C-9 Input parameters the layers for contaminant transport modeling

Well #	Zone #	Effective Porosity	Longitudinal dispersivity (m)	Transverse dispersivity (m)	Biodegradation rate for Benzene (d^{-1})	Biodegradation rate for MTBE (d^{-1})
Layer 1	I	0.2	20	1	0.001	0
	II	0.2	20	1	0.001	0
	III	0.2	20	1	0.001	0
	IV	0.2	20	1	0.001	0
Layer 2	I	0.2	20	1	0.001	0
	II	0.2	20	1	0.001	0
	III	0.2	20	1	0.001	0
	IV	0.2	20	1	0.001	0
Layer 3	I	0.2	20	1	0.0005	0
	II	0.2	20	1	0.0005	0
Layer 4		0.2	20	1	0.0005	0

C.5.3 Model Calibration

A calibration effort in this case would involve systematically adjusting the values of effective porosities, dispersivities (α_L , α_T), biodegradation rates (λ), (and giving some consideration to distribution coefficients (K_d), as well) for each layer in successive simulations, and comparing the results against the observed concentration at the monitoring wells. The transport model has not been fully calibrated. As the model now stands, the gross plume shapes from the simulations can be compared with mapped contamination from the field data. Actual site monitoring data show that benzene has never been detected in the water supply wells #19

and #21. With a calibrated model, evolution of the benzene plume could be simulated with greater confidence, and predictions about plume behavior could be made.

Figure C-6 illustrates benzene plumes in layers 1 and 2 from the five constant sources at the LUSTs (Table C-7) after 3 years, using the parameters listed in Table C-9. The five plumes remain separate from each other in layer 1 but some of them merged together in layer 2. All plumes stay almost the same or became stable after 3 years. None of the plumes migrates into layer 3 and thus layer 4 remains uncontaminated, too. This can be viewed as good news since both Well #19 and #21 are pumping from layer 4.

Figure C-7 illustrates the MTBE plume in the four layers from the two constant concentration sources (Table C-9) after 10 years. Figure C-7a is for layers 1 and 2 and Figure C-7b is for layers 3 and 4. This result indicates that the highly water soluble and recalcitrant MTBE can be expected to reach the well screens in the Dakota aquifer from sources of concentration in the range of 1000 ug/L.

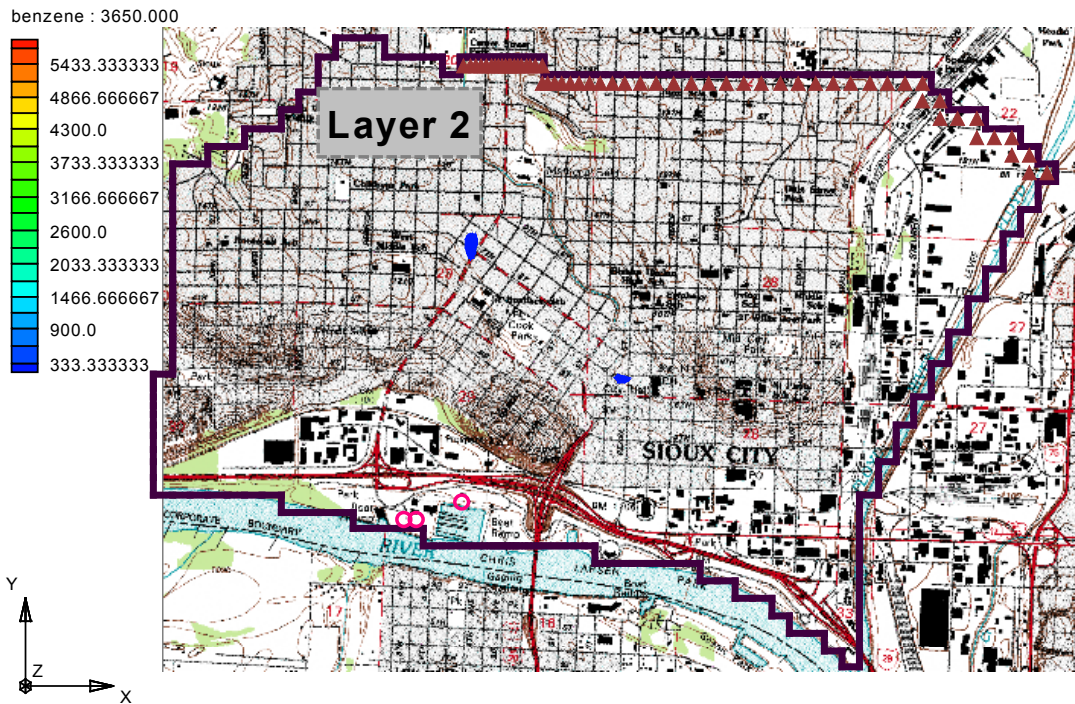
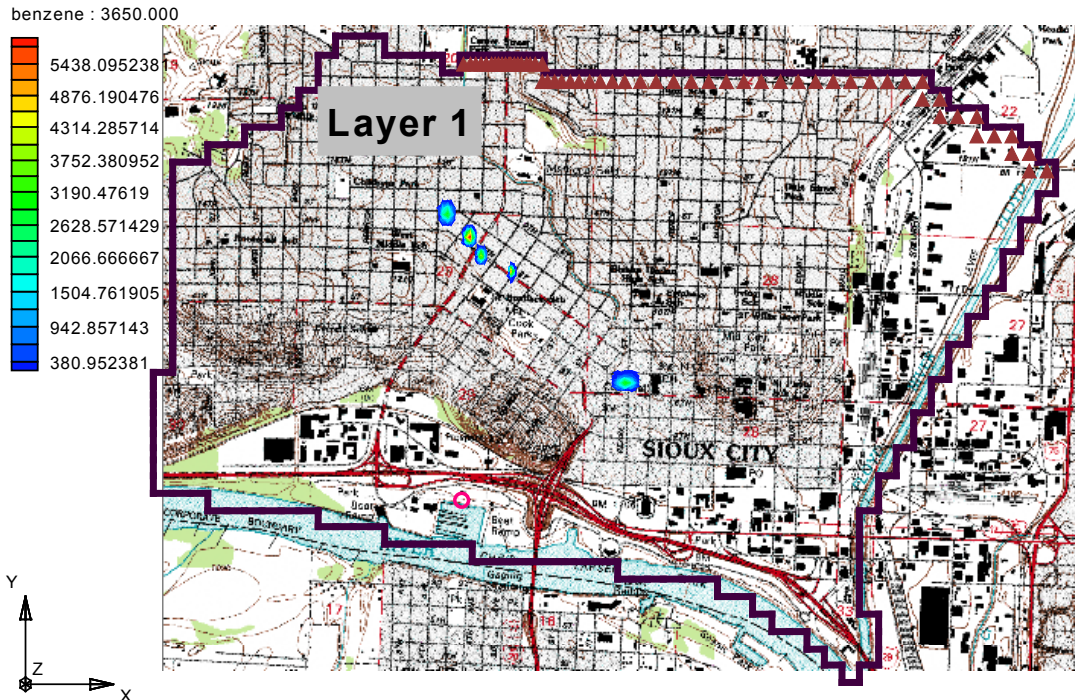


Figure C-6 Benzene concentrations at 10 years in layer 1 (top) and in layer 2 (bottom) at Cook Park (There is no benzene in layer 3 and 4).

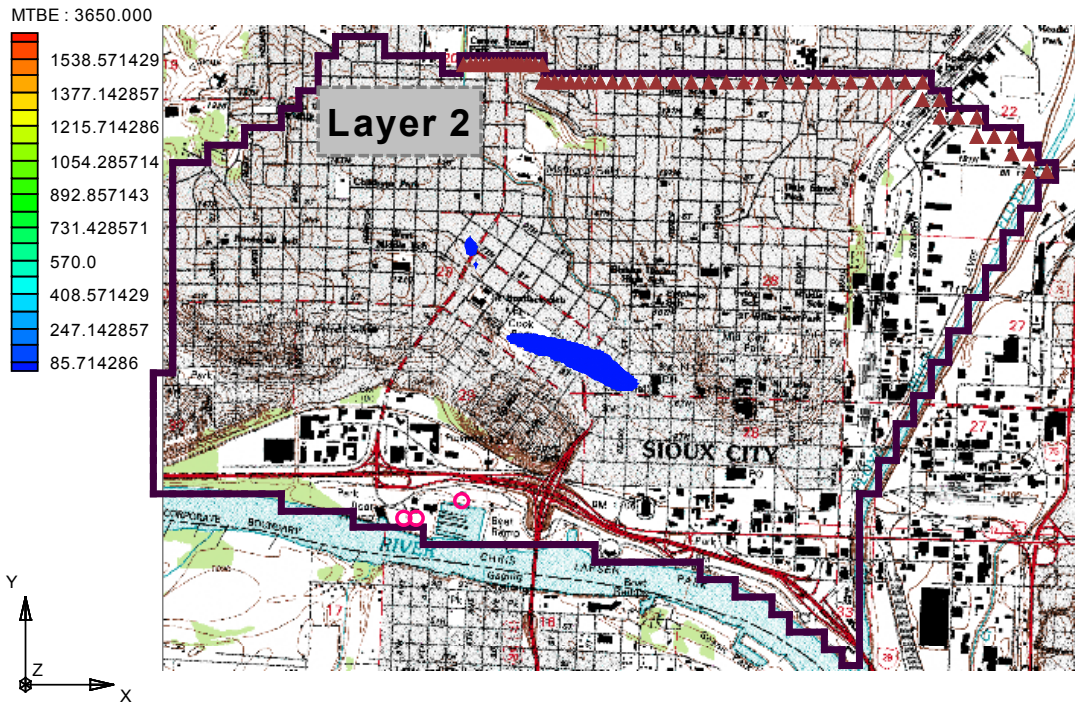
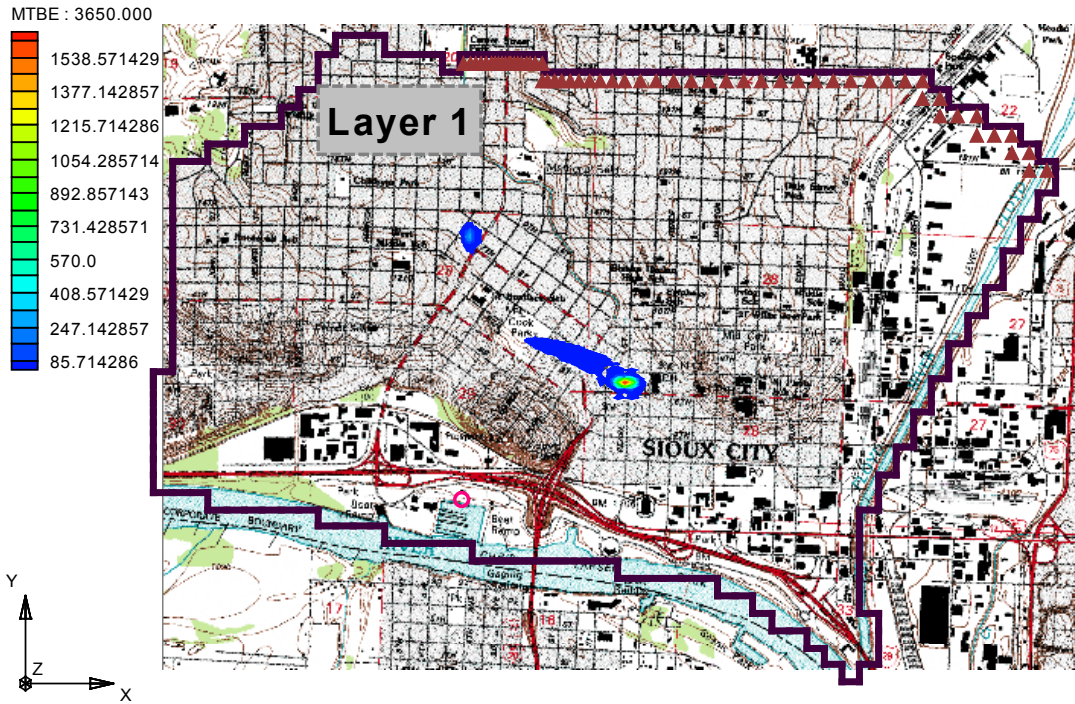


Figure C-7a MTBE concentrations at 3650 days in layer 1 (top) and in layer 2 (bottom) at Cook Park

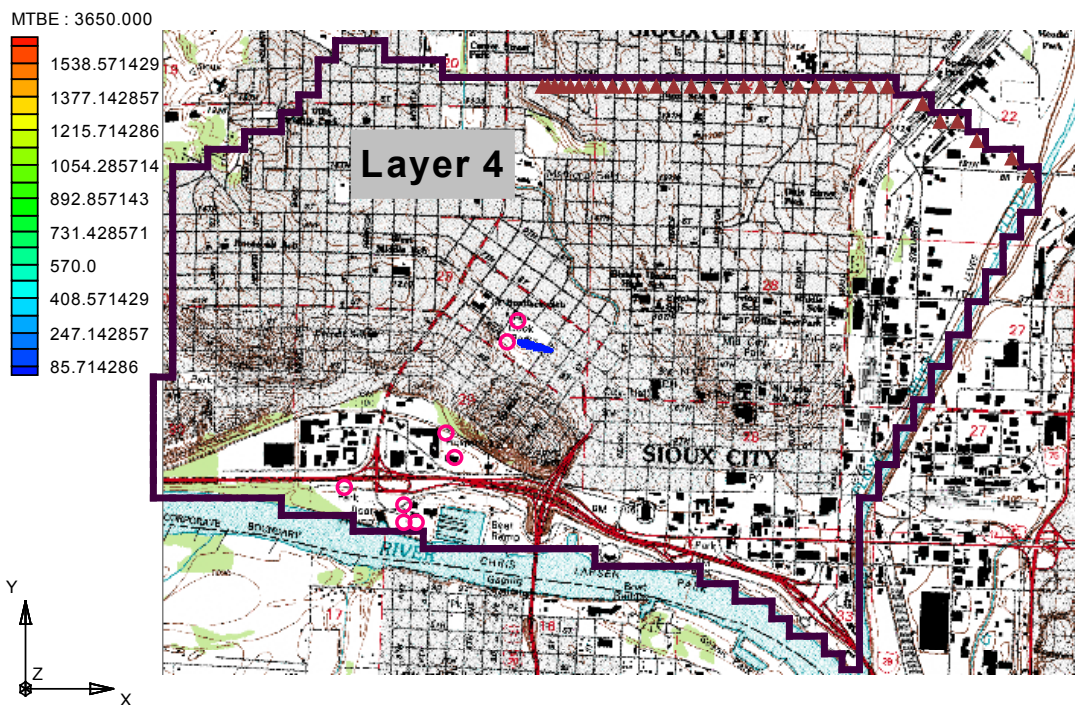
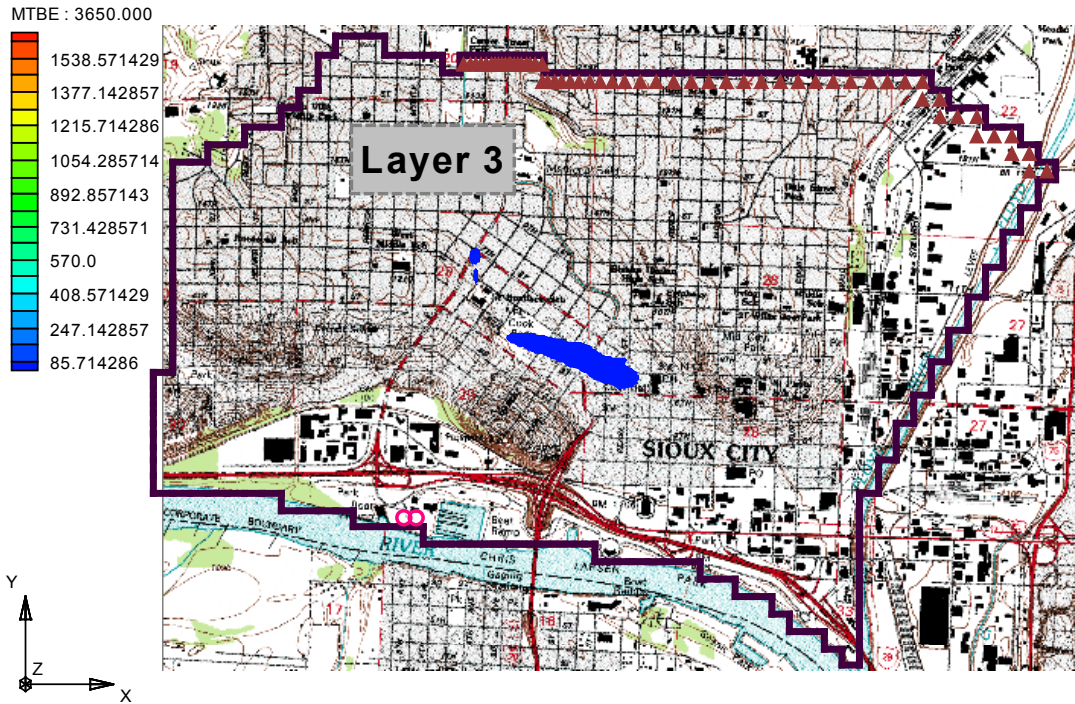


Figure C-7b MTBE concentrations at 3650 days in layer 3 (top) and in layer 4 (bottom) at Cook Park

C.5.4 Predictive Simulation

A new well will be drilled into the Dakota formation about 100 m to the southeast from Well #21. It will create additional drawdown around the Cook Park area and draw the contaminants to the well once it is pumped. Figure C-8 shows the hydraulic head contours when the new well is pumping. Figure C-9 presents the benzene plume in layers 1 and 2 and Figure C-10 gives the MTBE plumes in all four layers after 10 years based on the steady-state condition in Figure C-8. It is seen that the effect of the new well is not significant and the benzene and MTBE plumes in Figure C-9 and C-10 are similar to those in Figure C-6 and C-7, respectively.

C.6 Summary and Conclusions

The two existing water supply wells at Cook Park (#19 and #21) produce a large radius of influence in the alluvial aquifer and in the underlying Dakota aquifer. The full extent of the radius of influence is not well known due to the limited extent of the observation well network. The Riverfront well field exerts a minor influence on the hydraulic regime in the Cook Park neighborhood. That influence is limited to the Dakota Fm to the south of Cook Park. The petroleum plumes mapped in LUST site assessments to date shows only the water table manifestation of a much more complicated system. The effect of the Cook Park water wells is to draw-down the contaminant plume so that monitor wells that barely intersect the water table miss the contamination migrating at deeper levels.

Based on currently available sampling data, the source of the MTBE found in the Cook Park water wells could be the former LUST site 8LTK62, located to the east. The addition of a third water well to Cook Park similar to existing well #21 will cause the gradient to increase by about 60%, and will disturb the contaminant plume, possibly enhancing migration toward the wells.

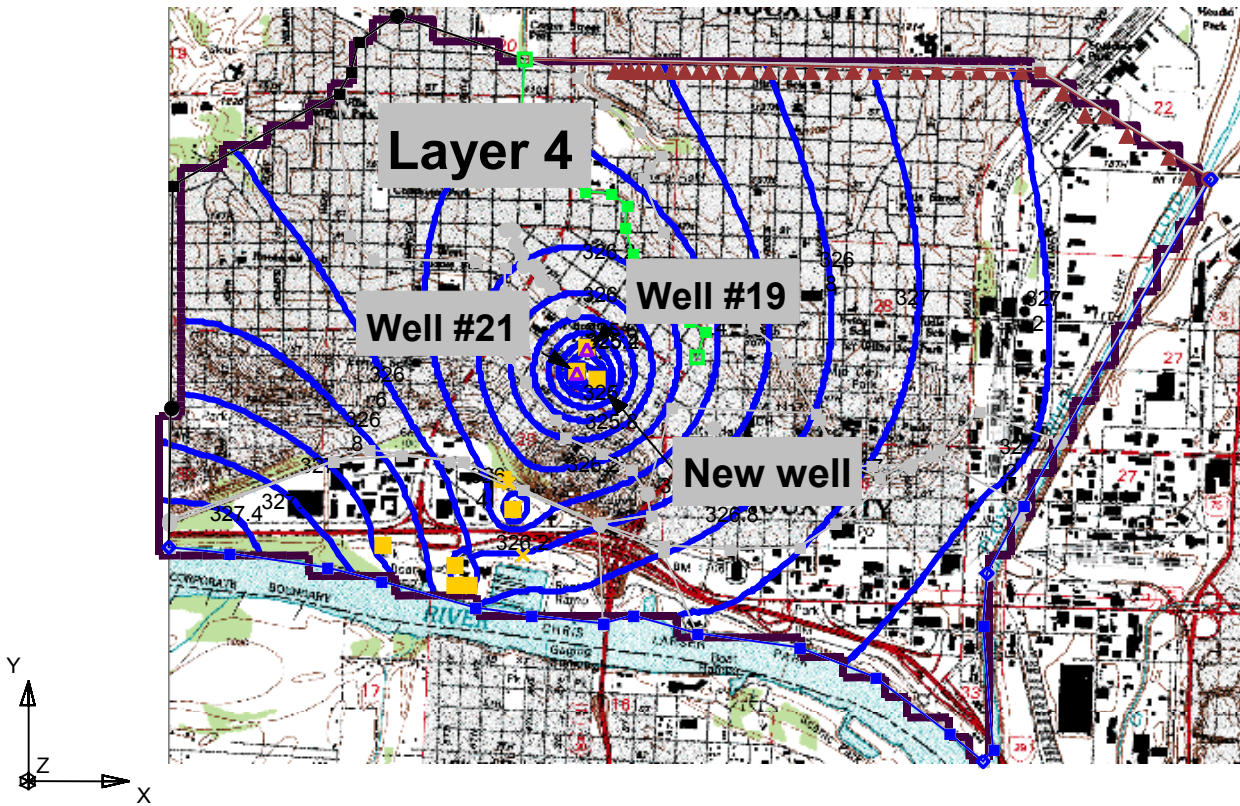


Figure C-8 Steady-state hydraulic head contours of Layer 1 at Cook Park with the proposed new well pumping at $7571 \text{ m}^3/\text{d}$

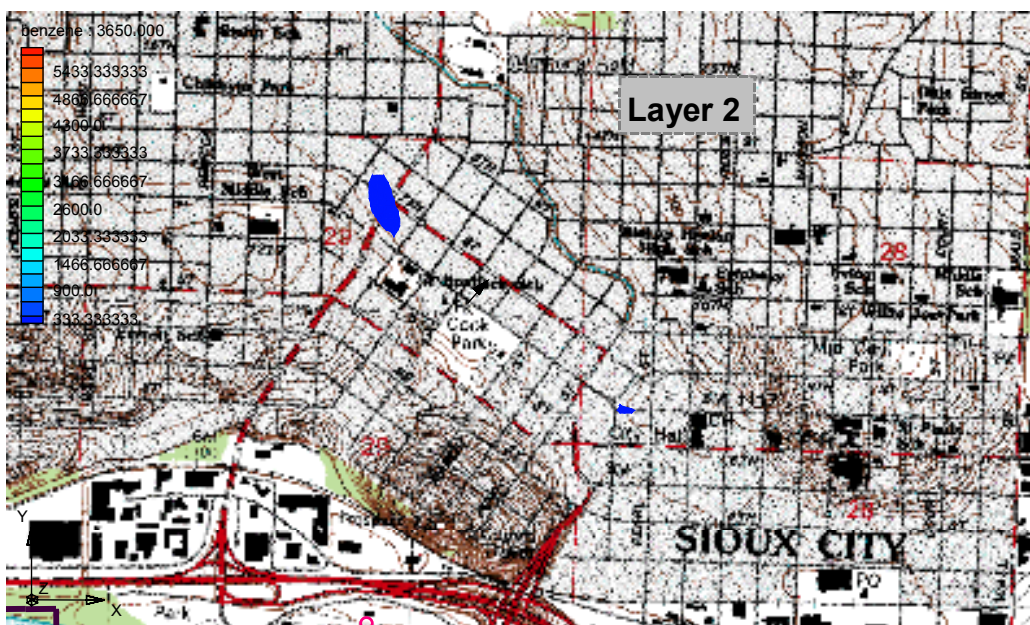
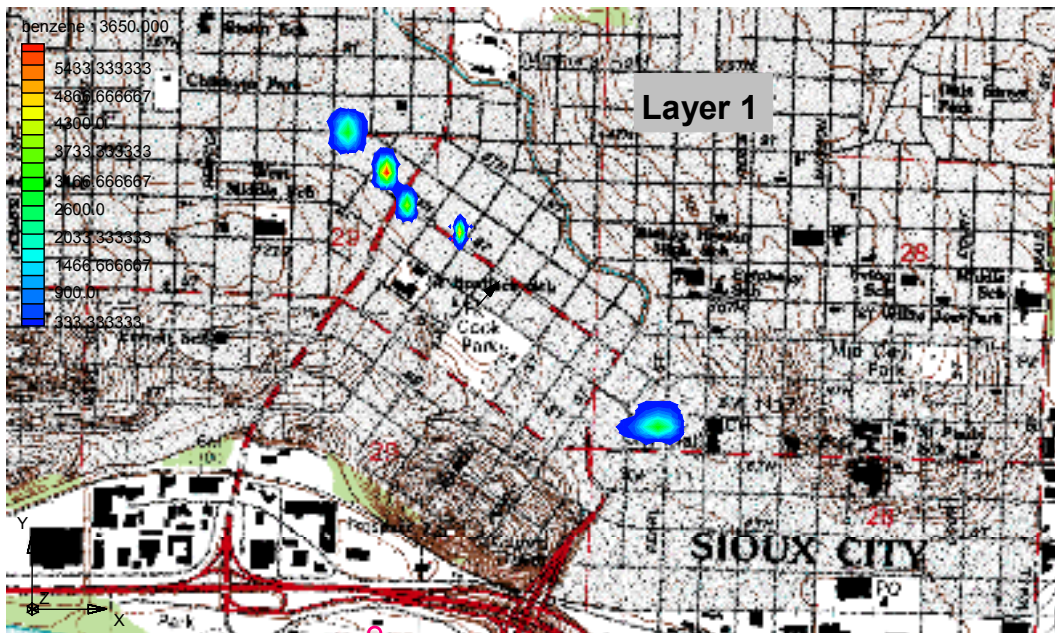


Figure C-9 Benzene concentrations at 10 years in layer 1 (top) and in layer 2 (bottom) at Cook Park

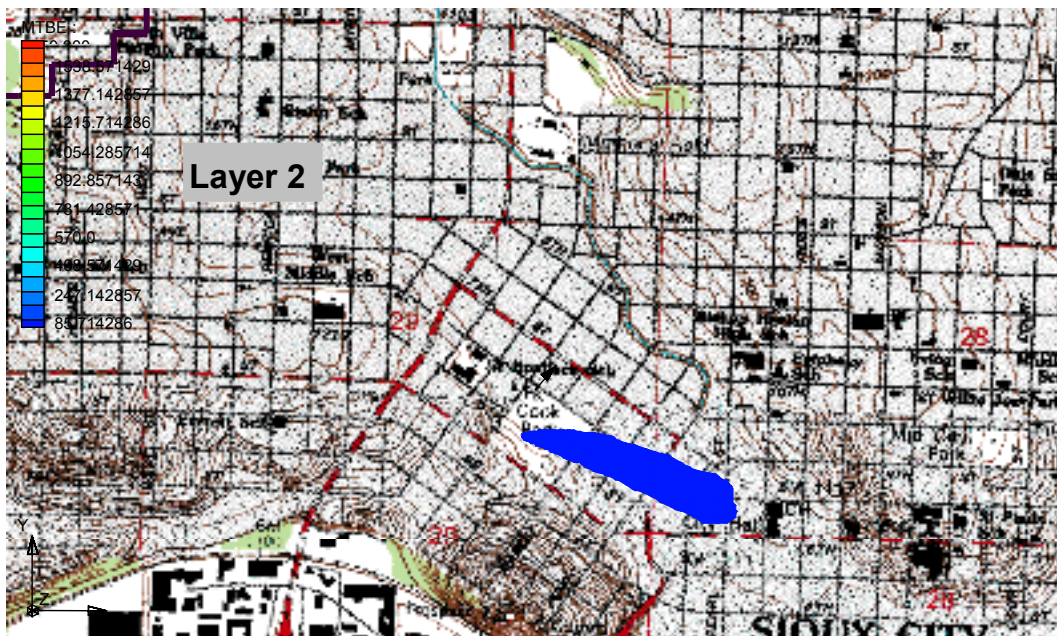


Figure C-10a MTBE concentrations at 10 years in layer 1 (top) and in layer 2 (bottom) at Cook Park



Figure C-10b MTBE concentrations at 10 years in layer 3 (top) and in layer 4 (bottom) at Cook Park

VI. FINAL THOUGHTS

The three examples are offered as illustrations of approaches one might take when developing numerical groundwater models to aid understanding of the existing situation and possible corrective actions at a LUST site. It must be stressed that before any modeling begins, all concerned parties must have a clear idea of the problem at hand, and the questions a numerical model can and cannot address.

In all three examples the scale of the problem far exceeded the dimensions and cleanup requirements of merely one high-risk LUST site. The labor-intensive modeling effort was justified in each example by the looming expense of remediating contaminated water supplies for the communities involved, and protecting those supplies from future contamination. The two of us spent time researching and building each model in proportion to the complexity of the model. Total time invested in the Climbing Hill model was about four person-days; in the Cook Park model, it was about twenty person-days; the Ida Grove model required an intermediate amount of time. Preparation of the write-ups given above for each model added another three to six person-days to the effort for each. Furthermore, these models were built lacking important, site-specific information that would come with the costs of additional assessment work in a Tier 3 effort and additional sampling and modeling needed to calibrate the transport models. Thus, a groundwater professional must carefully consider the economic factor before proposing a Tier 3 numerical modeling effort. In cases where a public water supply is affected, the effort is easily justified. In simpler cases, for example where a plastic water line is in a simulated plume from one LUST source, the economic considerations might mitigate toward corrective actions not involving numerical modeling.

REFERENCES

- 567 IAC 135: Iowa Administrative Code, Title 567, Chapter 135, (1996).
- Anderson, M.P. and W. Woessner (1992). *Applied Groundwater Modeling: Simulating of Flow and Advective Transport*. Academic Press, Inc., New York.
- Brigham Young Univ. Environmental Modeling Research Laboratory (2000). The Department of Defense Groundwater Modeling System, GMS version 3.1: Tutorials. See www.emrl.byu.edu
- Burkart, M.R. (1984). *Availability and Quality of Water from the Dakota Aquifer, Northwest Iowa*. US Geol. Surv. Water-Supply Paper 2215.
- Davis, A.D., (1995). Simulation of Pumping Options for the City of Ida Grove, Iowa. In GeoTek, (1995), below.
- EnecoTech (1997). *Feasibility Analysis Report, Benjamin Former Gasoline Station, 29 Deer Run Trail, Climbing Hill, Iowa, LUST No. 8LTU14*.
- GeoTek (1995). *Aquifer Test/Groundwater Model Assessment, Petroleum Contamination of City Well PWS #3, City of Ida Grove, Ida Grove, Iowa*.
- GeoTek (1996). *Contaminant Migration Pathway Assessment, Public Water Supply Well #3, Ida Grove, Iowa*.
- HDR Engineering (1998). *Remedial Investigation Draft Report, General Motors Corporation Former Rochester Facility, Sioux City, Iowa*.
- IDOT (1979a). Combination Bridge Interchange on Interstate I-29 and Wesley Way in Sioux City, Woodbury Co., Proj. No. I-IG-F-29-7(13)150--OB-97.
- IDOT (1979b). Combination Bridge Interchange Interstate Wesley Way over I-29, Woodbury Co., Proj. No. F-FG-20-1(49)--24-97.
- Iowa St. Hwy. Comm. (1957). Design for Twin 173'x30' Continuous Concrete Slab Bridge, Woodbury Co., Proj. I-03-8(1), 5/57.
- Kuehl and Payer (2000). *Draft Well Site Investigation for City of Ida Grove, Iowa*.
- Lovanh, N., Y-K. Zhang, R.C. Heathcote, and P.J.J. Alvarez (2000). *Guidelines to Determine Site-Specific Parameters for Modeling the Fate and Transport of Monoaromatic Hydrocarbons in Groundwater*, Rept. to the ICPUST Fund Board.

Munter, J.A., G.A.Ludvigson, B.J. Bunker, (1983). *Hydrogeology and Stratigraphy of the Dakota Formation in Northwest Iowa*. Iowa Geol. Surv. [IDNR-GSB] Water Supply Bull. No. 13.

Neuman, S.P. (1990). Universal Scaling of Hydraulic Conductivities and Dispersivities in Geological Media. *Water Resources Research*, Vol 26, no. 8, pp. 1749-1758.

Wiedemeier, T.H., J.T. Wilson, D.H. Kampbell, R.N. Miller, and J.E. Hansen (1995). *Technical Protocol for Implementing the Intrinsic Remediation with Long-Term Monitoring Option for Natural Attenuation of Dissolved-Phase Fuel Contamination in Groundwater*, U.S. Air Force Center for Environmental Excellence, Brooks AFB: San Antonio, TX.

Zhang, Y.-K., R.C. Heathcote, B.-M. Seo, N. Lovanh, and P.J.J. Alvarez (2001). *Evaluation of Computer Software Packages for RBCA Tier-3 Analysis*, Report to the Iowa Comprehensive Petroleum Underground Storage Tank Fund Board.